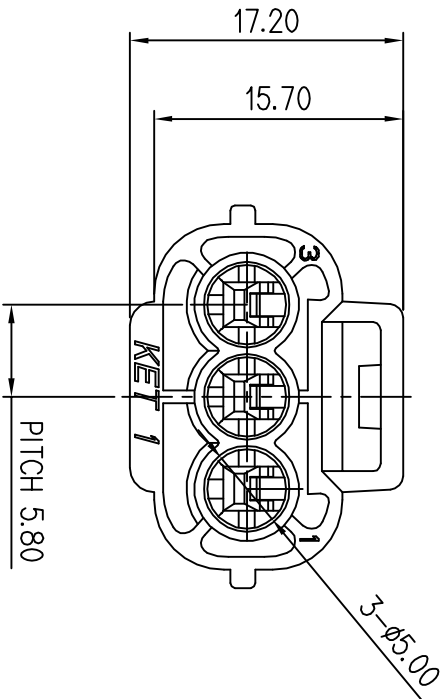
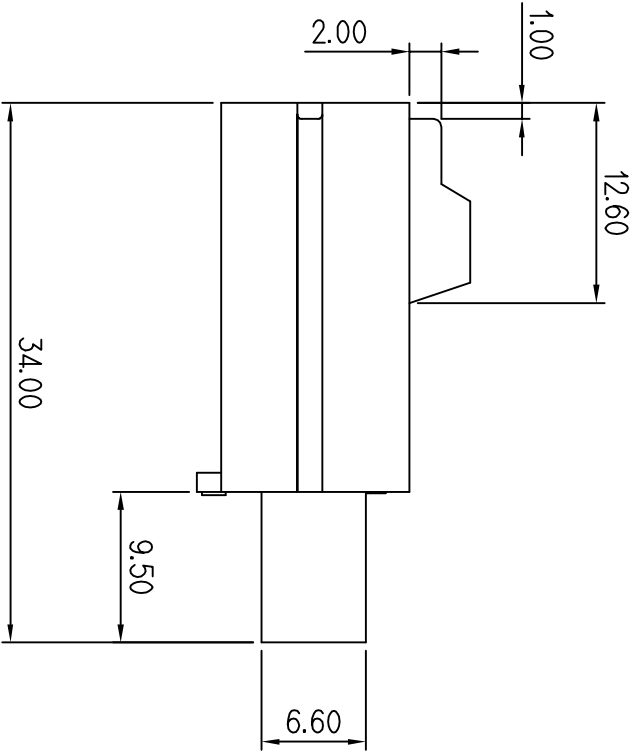
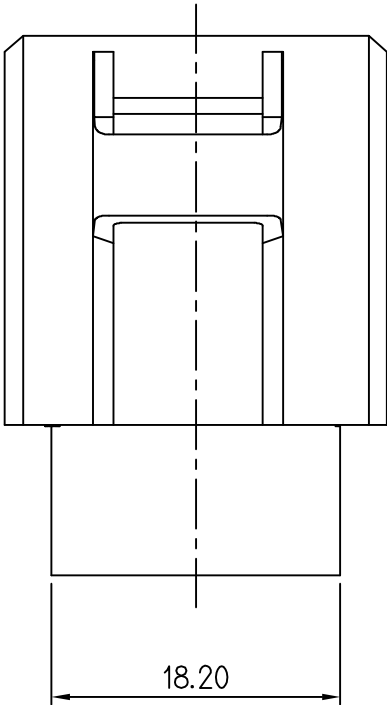
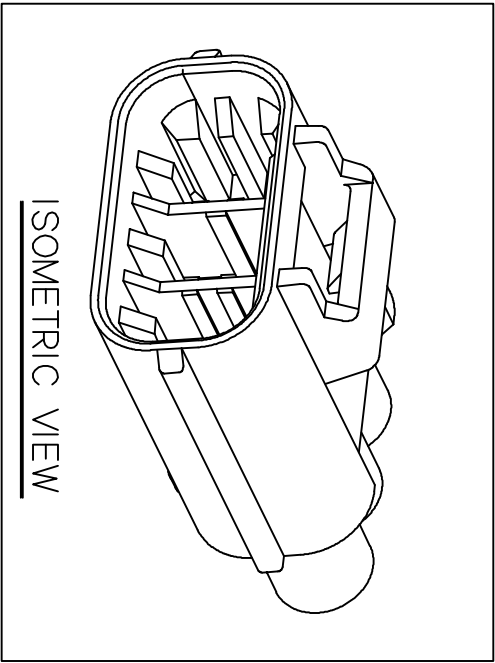


[illegible]

주 기

1. 지시하지 않은 반영 R은 0.2-0.3로 한다.

2. 기능상 유해한 BURR 및 WELDLINE 없음 것.

3. 적용 TERMINAL: ST741350, 51, 52-3

상대 HOUSING : MG615599

4. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정 한 최대 허용 농도를 초과해서는 안된다.

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.2—0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE TERMINAL : ST741350, 51, 52—3
- MATING HOUSING : MG615599
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY,
CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION.

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

					MATERIAL	PET+PC(GWTT)	 KOREA ELECTRIC TERMINAL CO., LTD. [ENGINEERED]
					FINISH	NATURAL	
					WIRE RANGE	CLASS 070(WP)	
					INSULATION	TYPE 070	
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		
DR.	LCM. '14.11.12	CHK.	PSH. '14.11.12		SEE TABLE		
CHK.	KSH. '14.11.12	APP.	BUC. '14.11.12		PART NAME		
					070(WP) 3M HOUSING		