
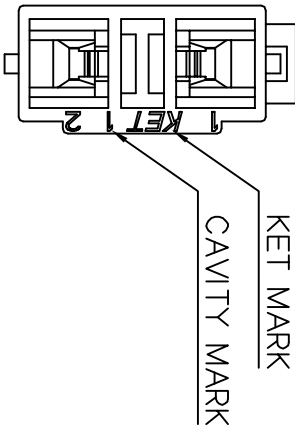
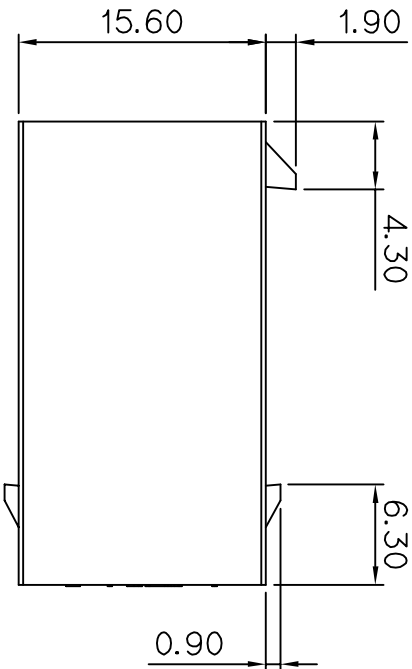



GENERAL TOLERANCE (HOUSING)						USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST740833, 834, 835, 836, 1296
3. APPLICABLE REAR HOLDER : MG631228
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

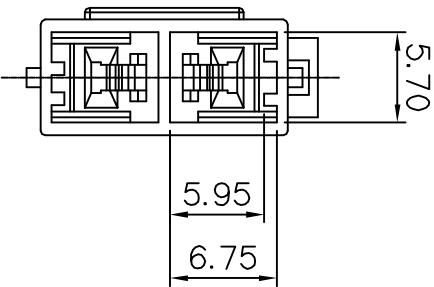

1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것
2. 적용 TERMINAL : ST740833, 834, 835, 836, 1296
3. 적용 REAR HOLDER : MG631228
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

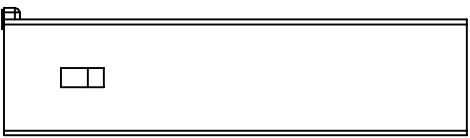

					MATERIAL PET+PC(GWIT)		KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE			CLASS
					INSULATION			TYPE
LTR	REVISION RECORD			DR. CHK.	APP.	DATE		TOLERANCE EXCEPT AS NOTED
DR.	PSH	'15.04.27	CHK. KSH	'15.04.27	PART NAME			SCALE 2/1
CHK.			APP. BUC	'15.04.27	PART NAME			0709 2M HOUSING
								PART NO. MG625458