

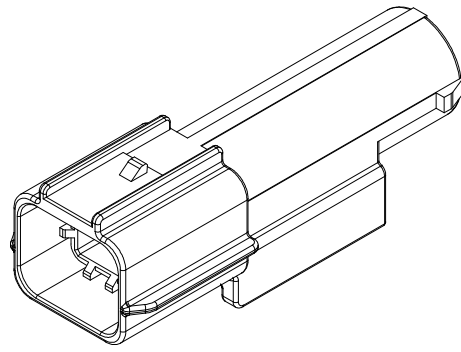


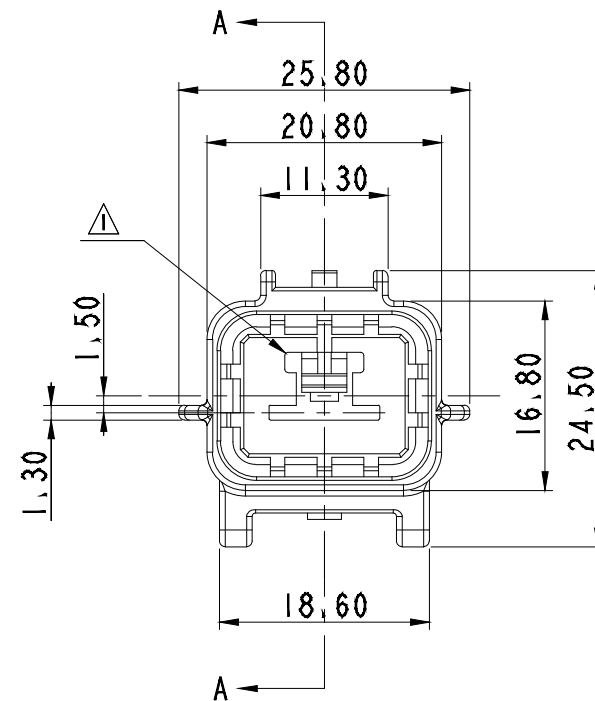


ISO VIEW

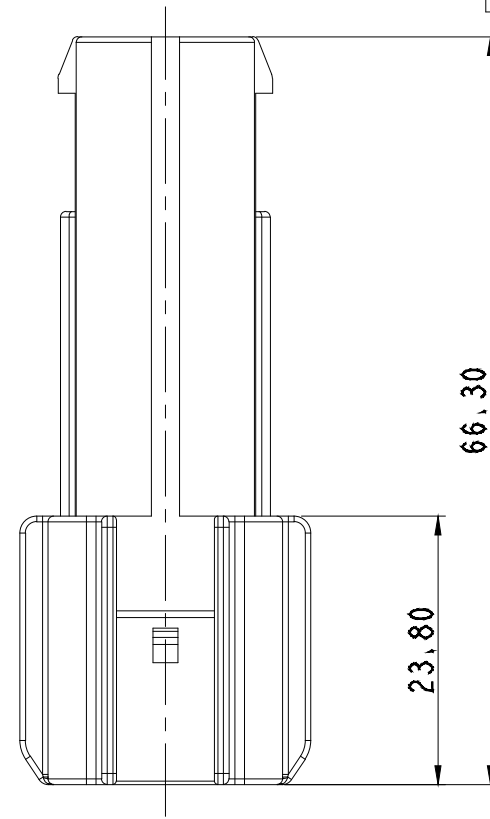



주기

1. 지시하지 않은 반경 R은 0.3으로 한다,
2. 지시하지 않은 모파기 C는 0.3으로 한다,
3. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것,
4. 적용 TERMINAL(375) : ST741353-S
WIRE SEAL(375) : MG685442(10SQ),
MG685429(15SQ)
REAR HOLDER : MG635763
CLIP : MG630778, MG633294
CONNECTOR : MG656837
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다,

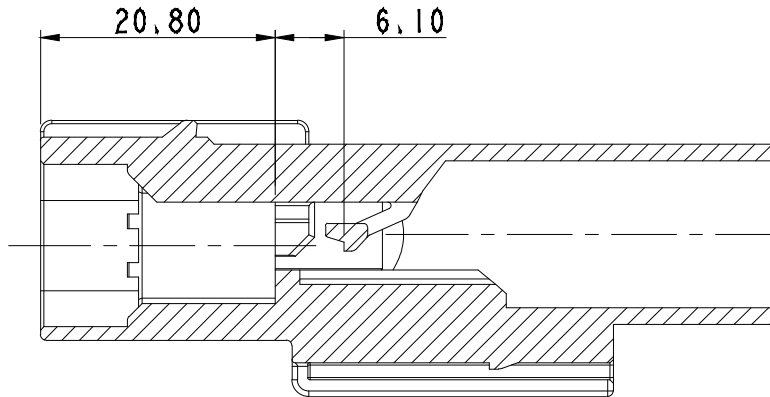

SECTION A-A

SCALE 1.5/1

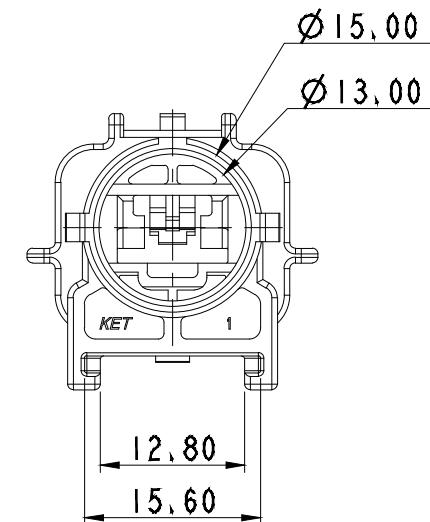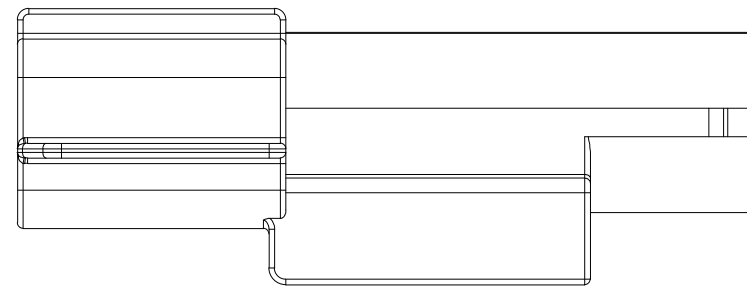

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

*

(DIMENSIONS IN MM)

GENERAL TOLERANCE (HOUSING)

10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS,
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER,
3. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION,
4. APPLICABLE TERMINAL(375) : ST741353-S
WIRE SEAL(375) : MG685442(10SQ),
MG685429(15SQ)
REAR HOLDER : MG635763
CLIP : MG630778, MG633294
CONNECTOR : MG656837
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		SEE TABLE			
						WIRE RANGE		-	CLASS	SEE NOTE	
						INSULATION		-	TYPE	375 WP	
	ECO-1604-305 근거 도면 제작성 (HSG 또는 관련 결함 보정)			YDH	HYJ	SUK	16.04.26	TOLERANCE EXCEPT AS NOTED		SCALE 1.5/1	PART NO. MG625460
LTR	REVISION RECORD			DR,	CHK,	APP,	DATE	SEE TABLE			
DR,		LSY 2015.10.13		CHK, KMH 2015.10.13			PART_NAME 375 WP IM HOUSING				
CHK,				APP, BIN 2015.10.13							