
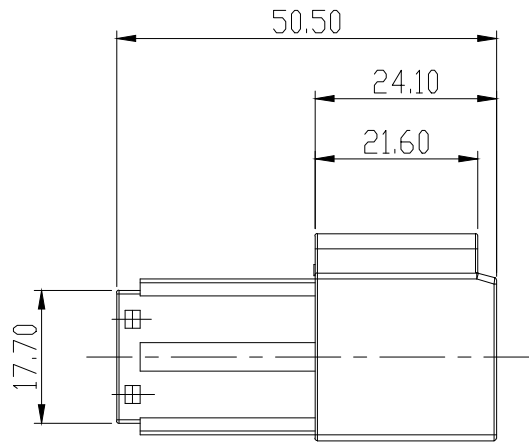
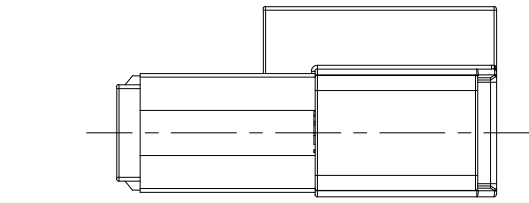
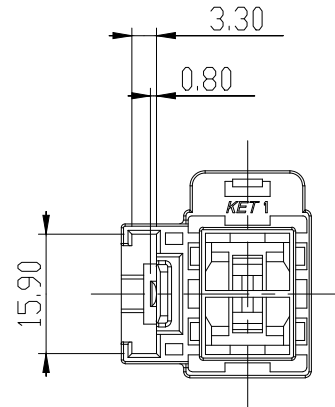
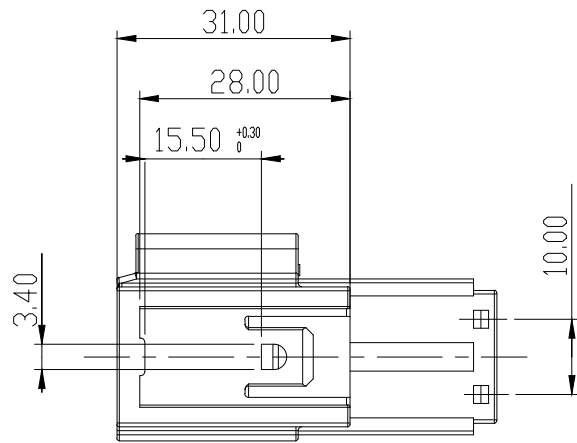
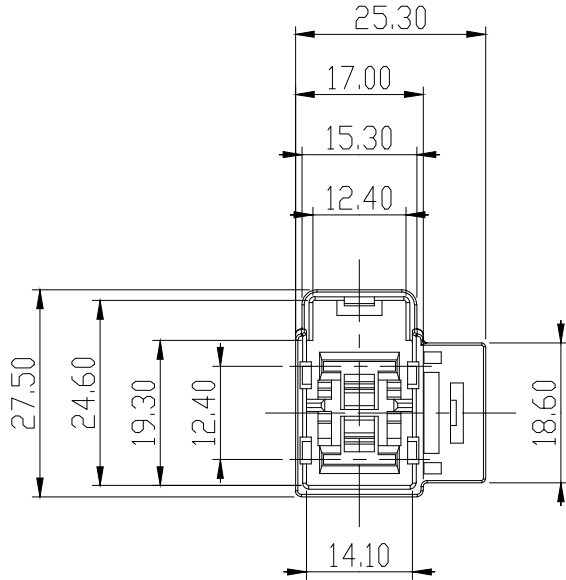


- 주 기
1. 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
 2. 적용 TERMINAL: ST740538-3, ST740539-3
적용 REAR HOLDER: MG630657
적용 FEMALE HOUSING : MG655655
 3. NON-CLIP 사양 (3.2t Bracket 적용)
 4. KET 문자: 기울기 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : 기울기 0° (H: 0.1~0.2, SIZE: 2.0)
 5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE TERMINAL: ST740538-3, ST740539-3
APPLICABLE REAR HOLDER: MG630657
APPLICABLE FEMALE HOUSING: MG655655
 3. NON-CLIP SPECIFICATION (Use to 3.2t Bracket)
 4. KET MARK : TAPER 15° (H: 0.1~0.2, SIZE: 2.0)
CAVITY NO. : TAPER 0° (H: 0.1~0.2, SIZE: 2.0)
 5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)									USED ON
10 MAX	30 MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	

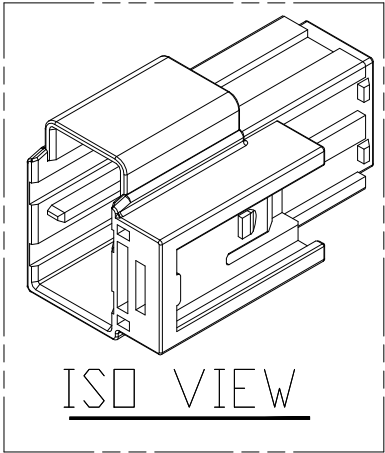

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE	-	CLASS	375
					INSULATION	-	TYPE	비방수
△ 경보 항목에 의한 양산도면출도 (ECO-1709-346)	AYT	CKI	CMS	17.09.25	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 1/1	PART NO. MG625474
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART_NAME	
DR. JDR	2016.11.08		CHK. SSH	2016.11.09			375 2M HOUSING(W to W)	
CHK.			APP. BIN	2016.11.09				