



GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE




1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
3. APPLICABLE R/HOLDER : MG635252
4. APPLICABLE TERMINAL : ST741175,1176

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 3.적용 R/HOLDER : MG635252
- 4.적용 TERMINAL: ST741175,1176

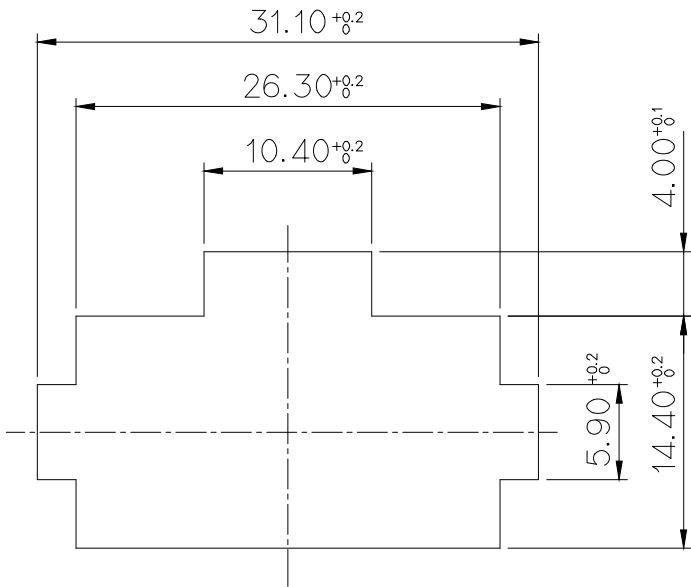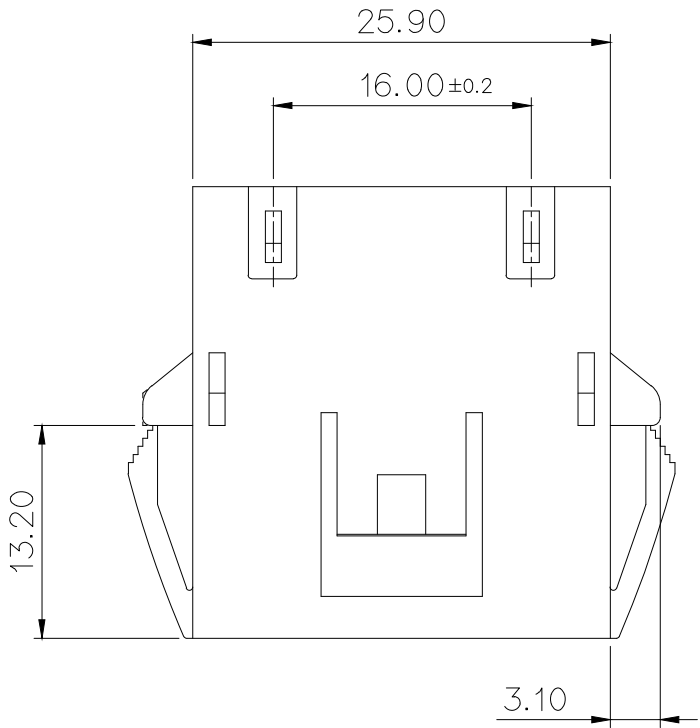

[PANEL THICK.=0.8-2.0]
PANEL HOLE DIM.

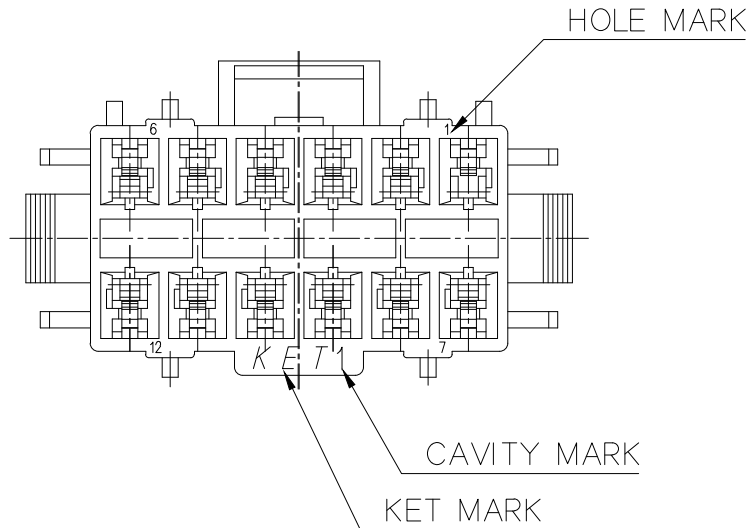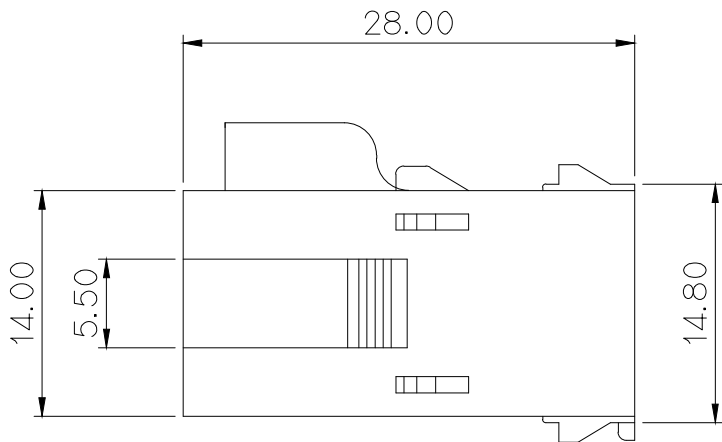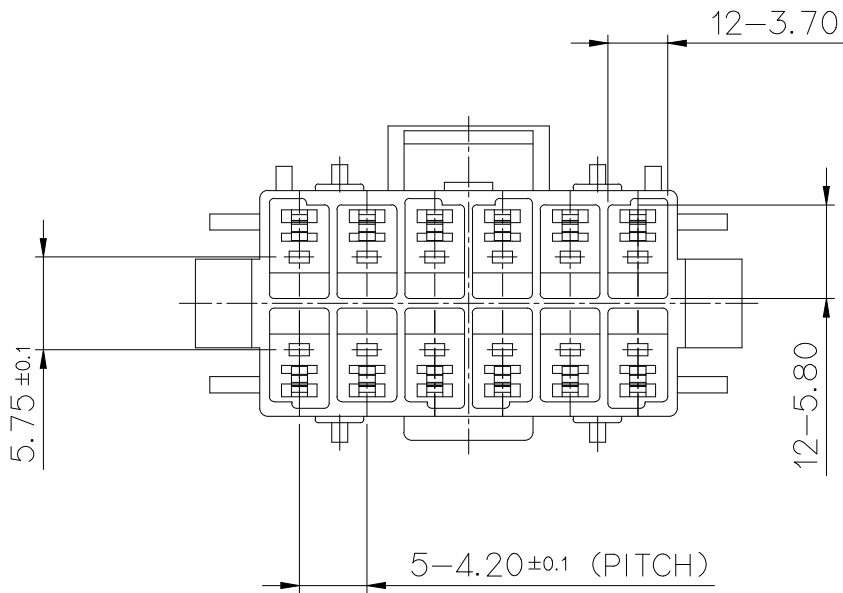

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
						WIRE RANGE			
						INSULATION			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG625481-012
DR. PSH.		CHK. KSH.		PART NAME NEW 050 12M HOUSING(WING B)					
CHK.		APP. BUC.							