

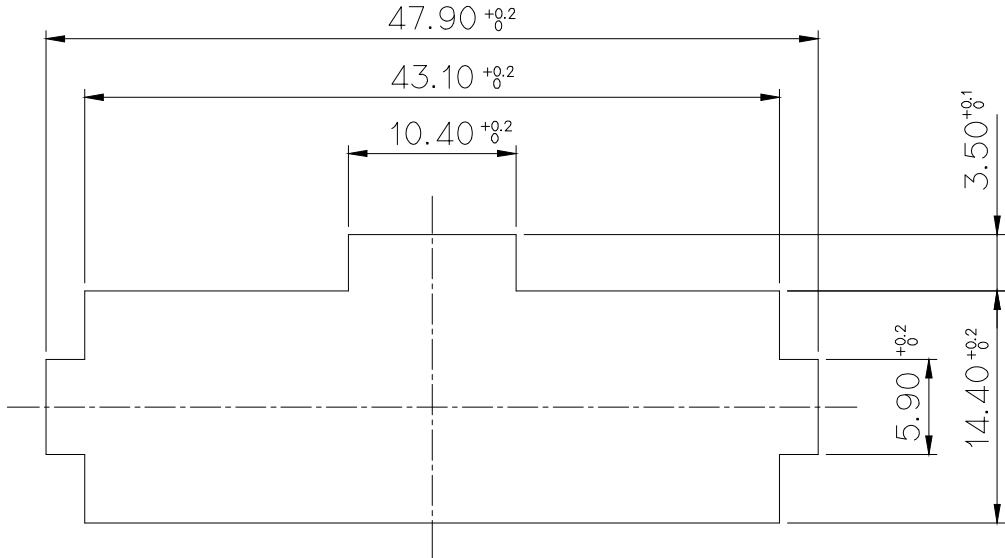
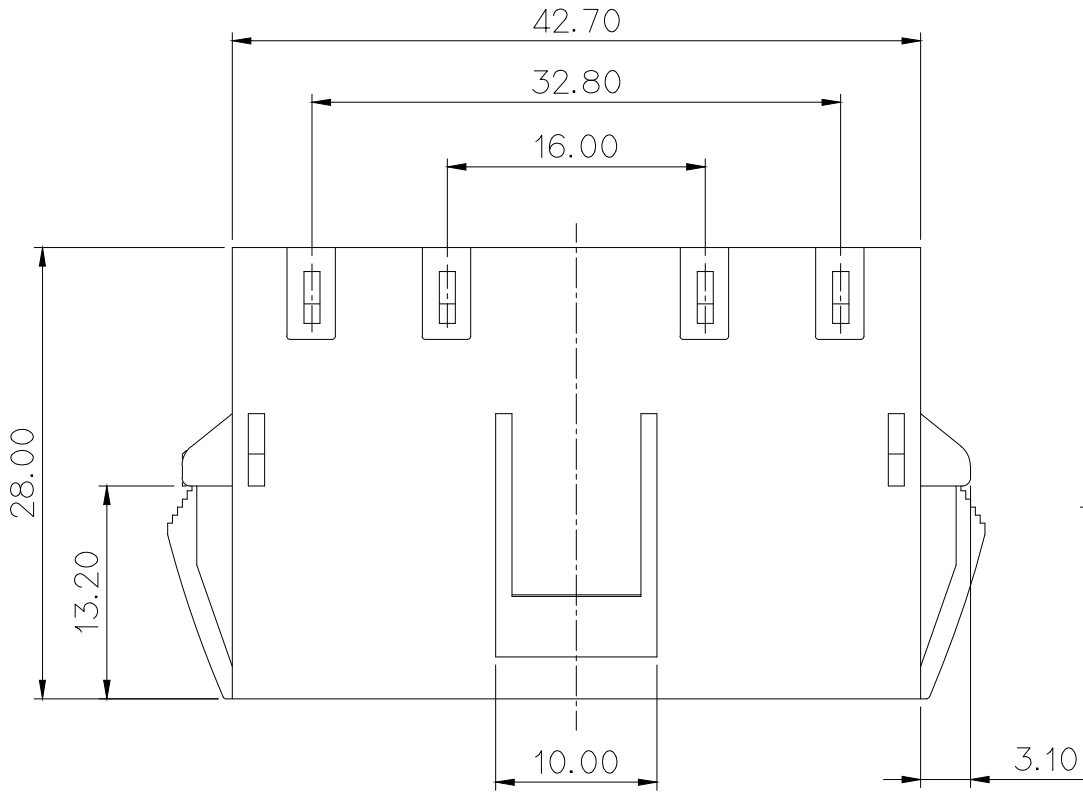
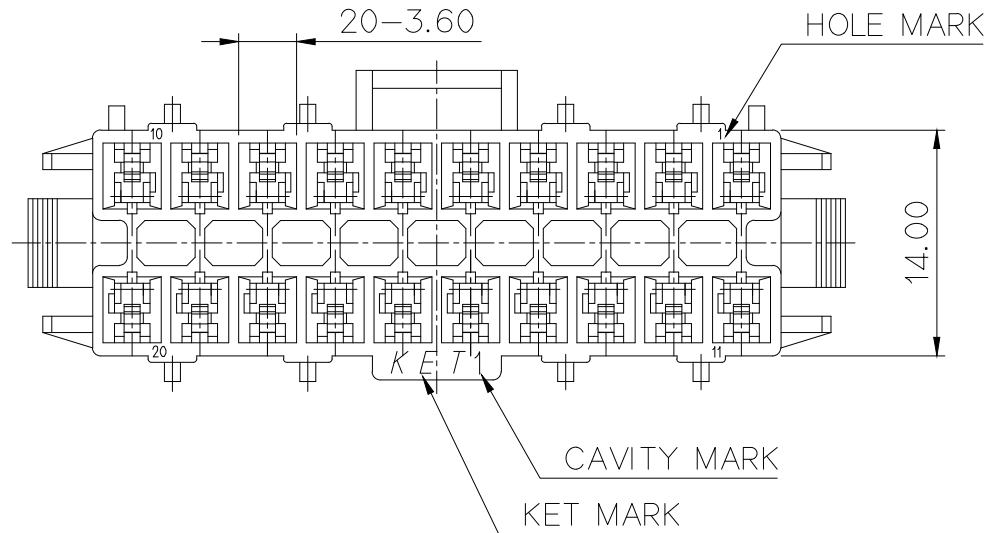


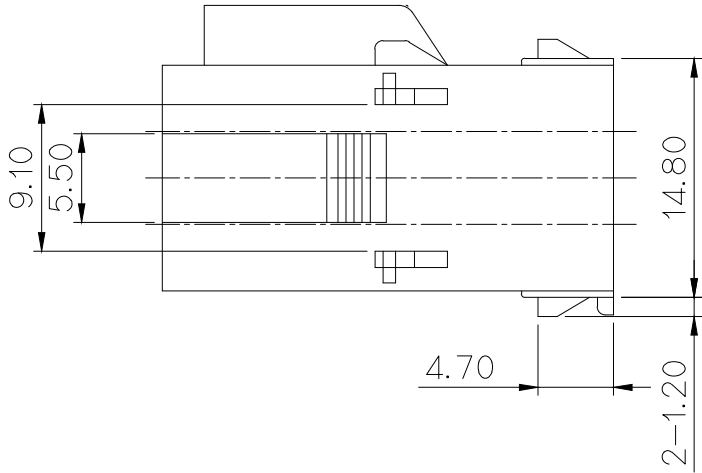

[PANEL THICK.=0.8-2.0]
PANEL HOME DIM'

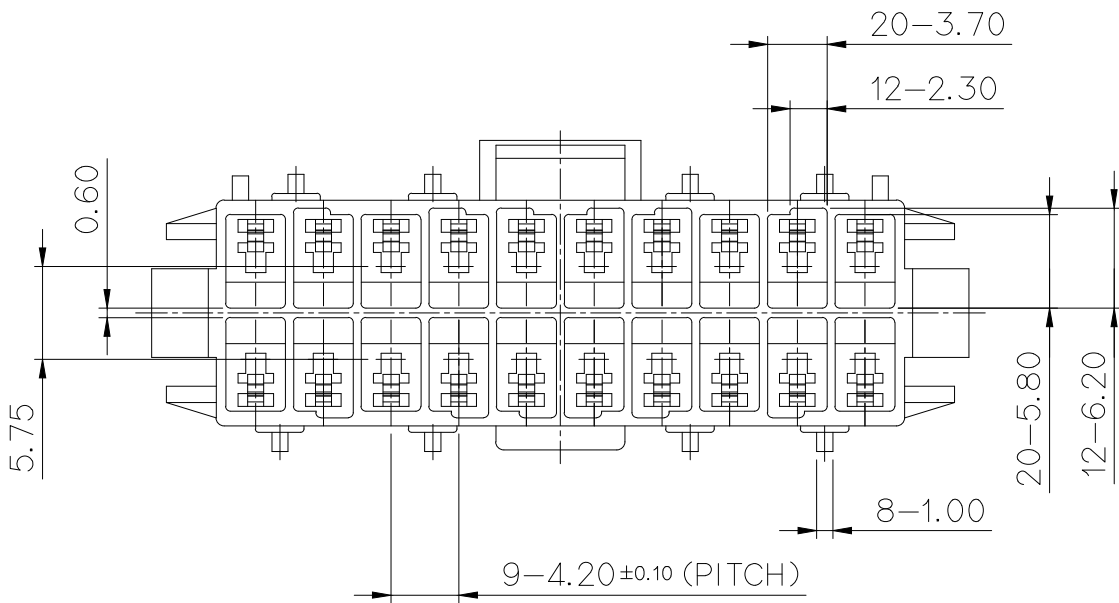

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

주 기

- 1.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.
- 3.적용 R/HOLDER : MG635620
- 4.적용 TERMINAL: ST741175,1176

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.
- 3. APPLICABLE R/HOLDER : MG635620
- 4. APPLICABLE TERMINAL : ST741175,1176

APPROVED

2019-11-05

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

						MATERIAL	PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.			
						FINISH	NATURAL				
						WIRE RANGE	CLASS		050		
						INSULATION	TYPE				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.		
	DR.	PSH. 17.08.21	CHK.	KSH.			SEE TABLE	2/1	MG625483-120		
	CHK.		APP.	BUC.			PART NAME				NEW 050 20M HOUSING WING