
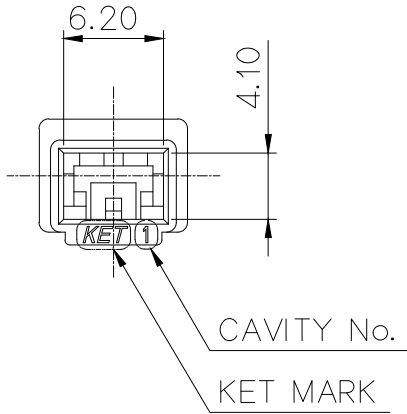
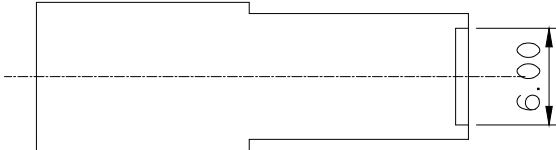
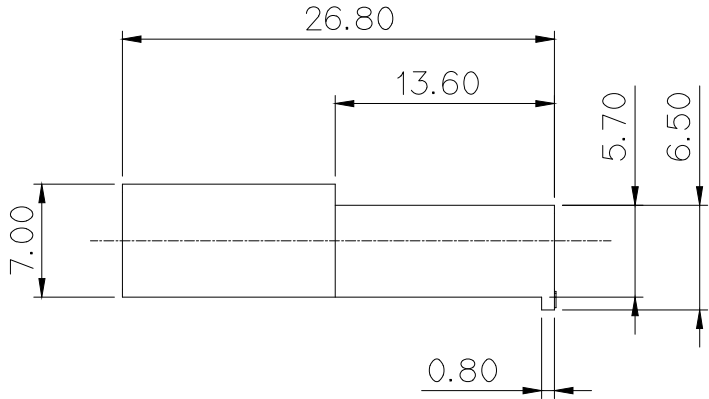
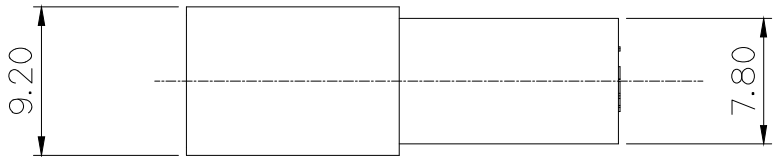



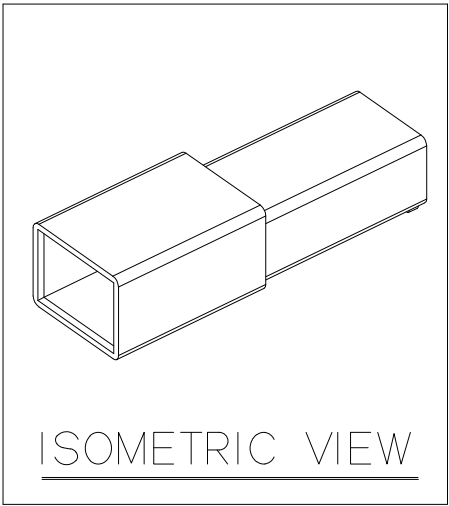

NOTE

1. APPLICABLE HOUSING : MGMG630588, MG635007T- *01
APPLICABLE TERMINAL : ST741400-3M
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	SEE NOTE
±0.25	±0.35	±0.55	±0.95	±1.0	

-.PART NO. *표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

주 기

- 1.적용 HOUSING: MG630588, MG635007T- *01
적용 TERMINAL: ST741400-3M
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team

ISSUE MARK

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH SEE TABLE				
					WIRE RANGE				
					INSULATION				
							CLASS .187		
							TYPE P-LOCK		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG625484-*01
DR.	SMG '18.01.26		CHK.		PSH '18.01.26		PART NAME 187 P-LOCK 1M HS'G		
CHK.	KSH '18.01.26		APP.		BUC '18.01.26				