
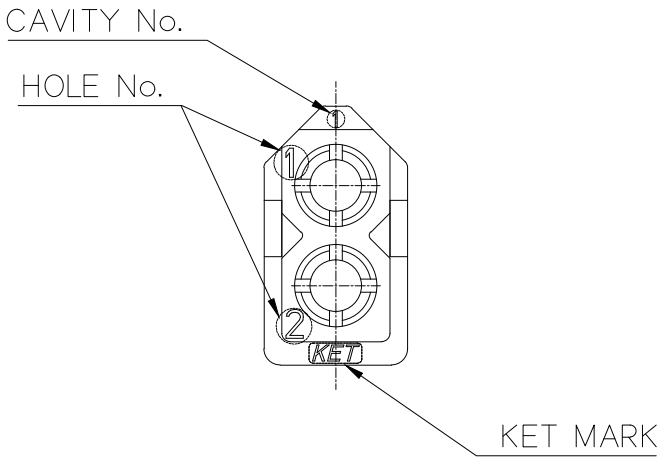
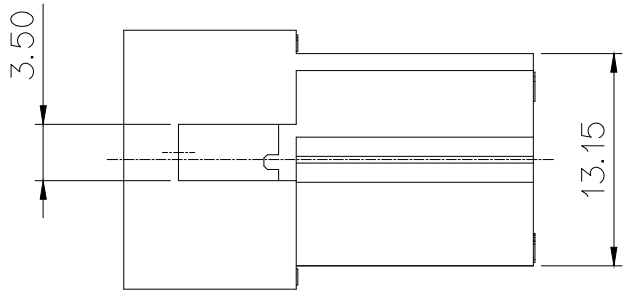
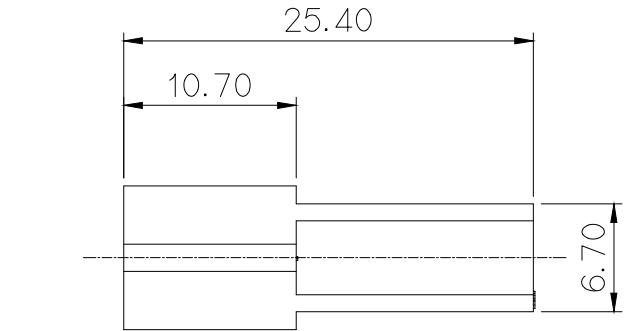
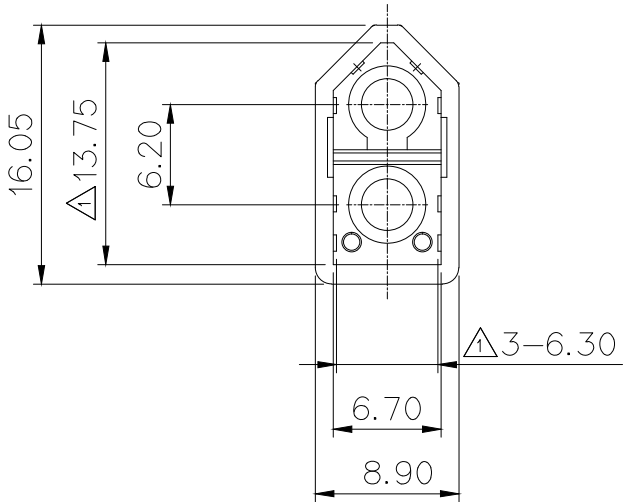


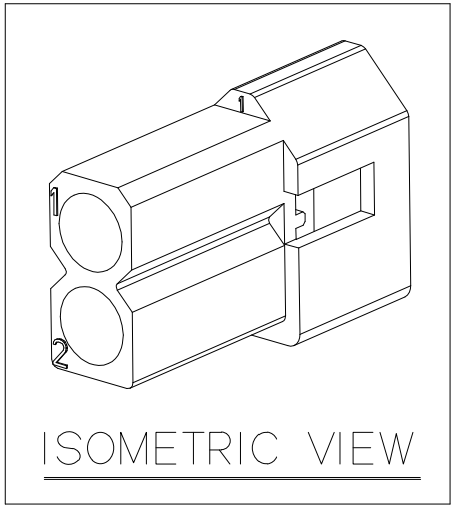

-.PART NO. *표시는 색상 표기임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK
6	GREEN

주 기

- 1.적용 HOUSING: MG614501T- *02
적용 TERMINAL: ST750207-3/0208-3/0330-3
- 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	SEE NOTE
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

1. APPLICABLE HOUSING : MG614501T- *02
APPLICABLE TERMINAL : ST750207-3/0208-3/0330-3
2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

					MATERIAL PET+PC(GWIT)		 KOREA ELECTRIC TERMINAL CO., LTD.			
					FINISH SEE TABLE					
					WIRE RANGE		CLASS ϕ2.0			
					INSULATION		TYPE			
△	ECO-1812-115 근거 도면 재작성	SMG KSH	BUC	'18.12.20	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG625486-*02			
LTR	REVISION RECORD	DR.	CHK.	APP.					DATE	
DR.	SMG '18.02.27	CHK.	PSH	'18.02.27					PART NAME PHI 2.0 2M HOUSING P6.2	
CHK.	KSH '18.02.27	APP.	BUC	'18.02.27						

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK