
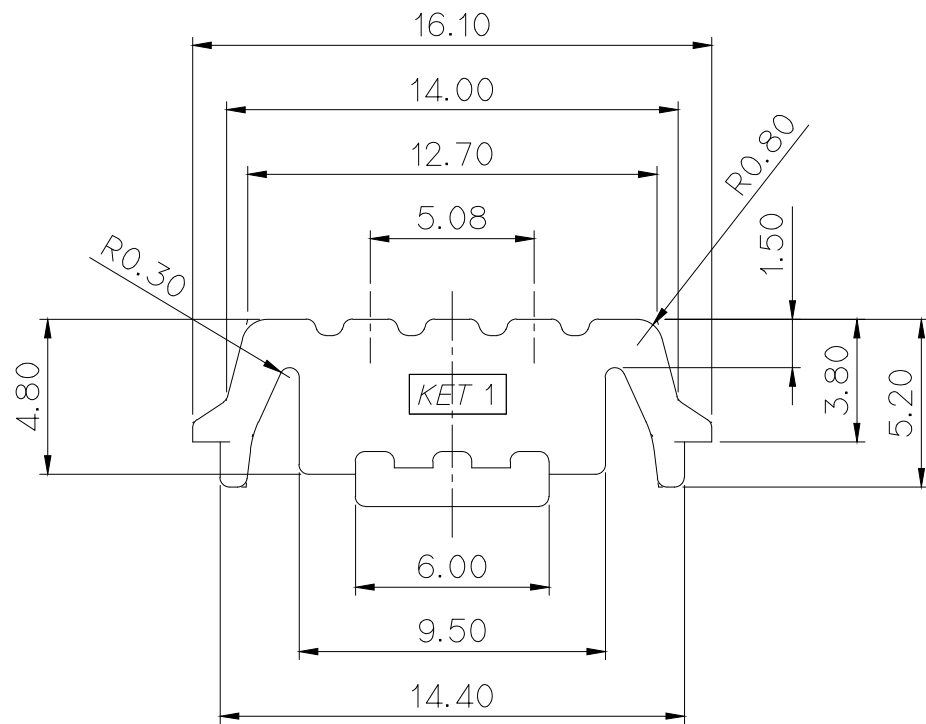


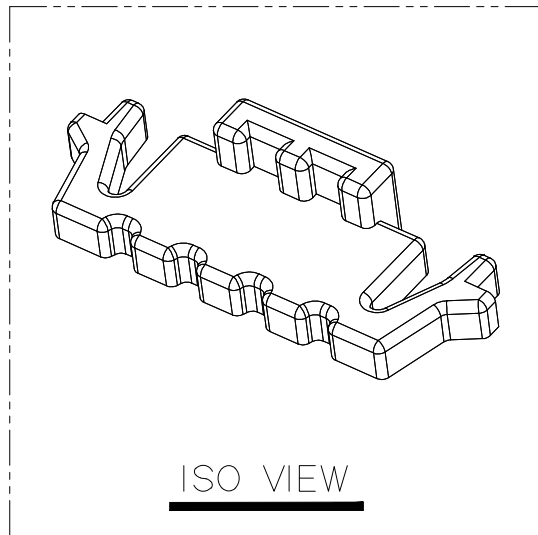


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.3 RADIUS.
2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS
TO BE 0.3 CHAMFER.
3. MUST BE FREE OF FLASH, SINK
AND IMPERFECTION THAT AFFECT FUNCTION.
4. APPLICABLE HOUSING : MG610372
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL
NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION.

주 기

- 1.지시하지 않은 반경 R은 0.3 으로 한다.
- 2.지시하지 않은 모따기 C는 0.3으로 한다.
- 3.기능상 유해한 FLASH, SINK, 미성형 등이 없을 것.
- 4.적용 HOUSING : MG610372
- 5.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

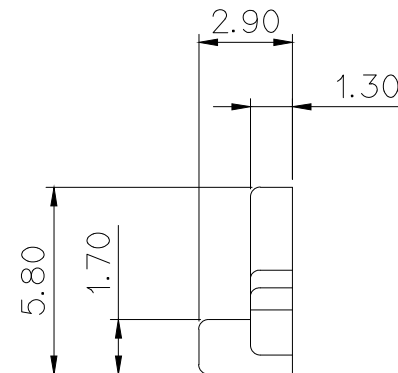

					MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		YELLOW		
					WIRE RANGE		CLASS		
					INSULATION		TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	H.S.KIM 09.05.08		CHK.				SEE TABLE	4/1	MG630375
CHK.			APP.			PART NAME			
						SP 10F REAR HOLDER			