
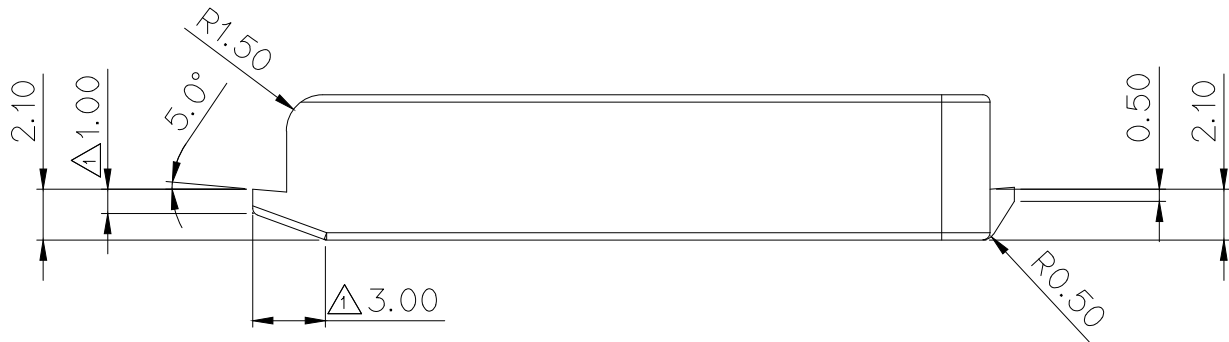
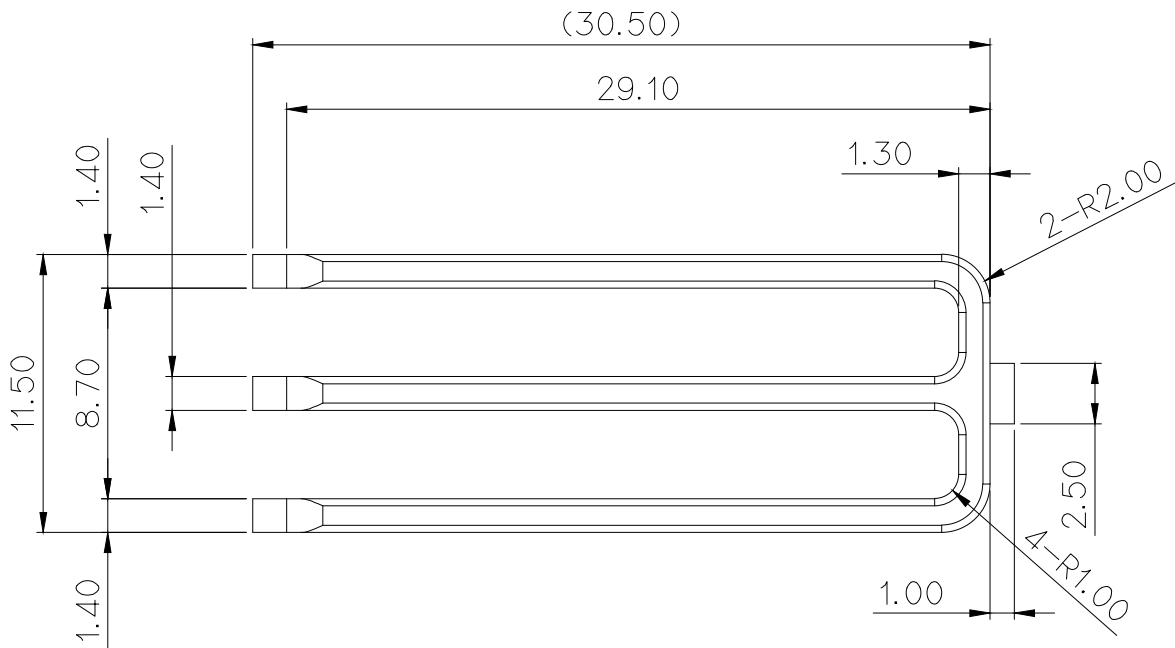


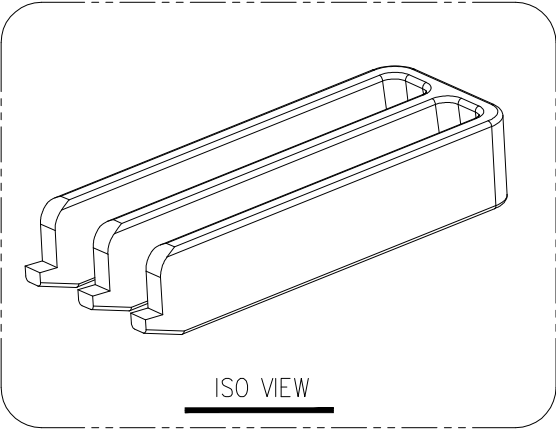


주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을 것.
- 적용 CONNECTOR :
 - SDL 20P "I" TYPE HS'G (MG610412, MG620413)
 - DIAGNOSIS 20F CONNECTOR SERIES.
- 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.



NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN

*

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

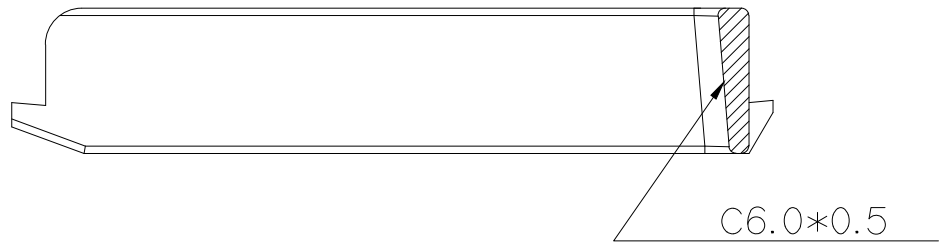

SECTION A-A

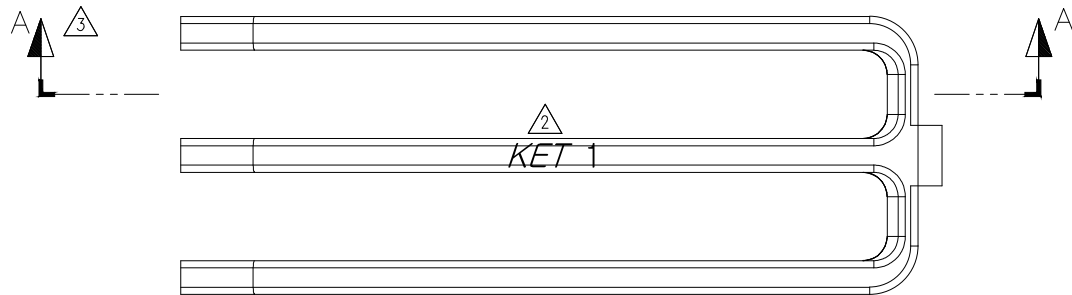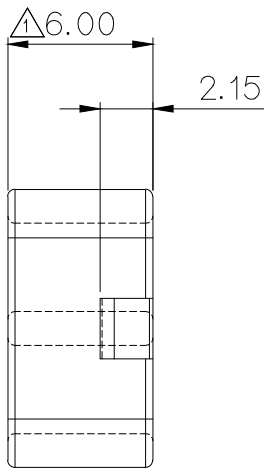

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR :
 - SDL 20P "I" TYPE HS'G (MG610412, MG620413)
 - DIAGNOSIS 20F CONNECTOR SERIES.
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
3	ECO-1508-153 근거 도면 재작성	SSY	CSH	LSY	15.08.28	WIRE RANGE		CLASS	7157-8305
2	ECO-1408-100 근거 도면 재작성	KCS	HYJ	LSY	14.08.27	INSULATION		TYPE	
1	ECO-1406-111 의거 형상 변경	CKY			14.06.16	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 3/1	PART NO. MG630414
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME		
DR.	KYS	1992.03.02	CHK.	CJH	1992.03.06	SDL HS'G 20P REAR HOLDER			
CHK.	J.W. KIM		APP.	WATANABE					