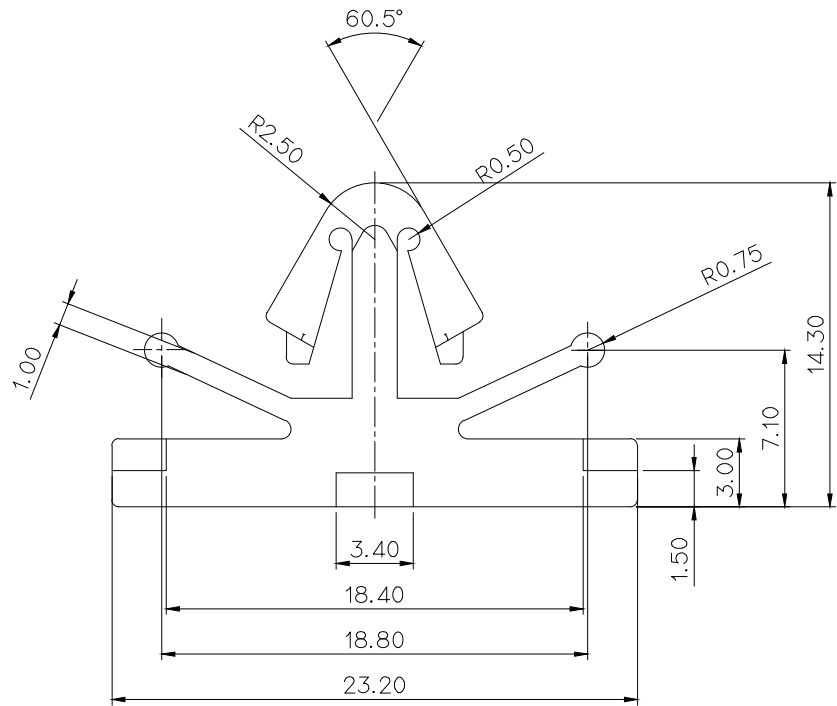
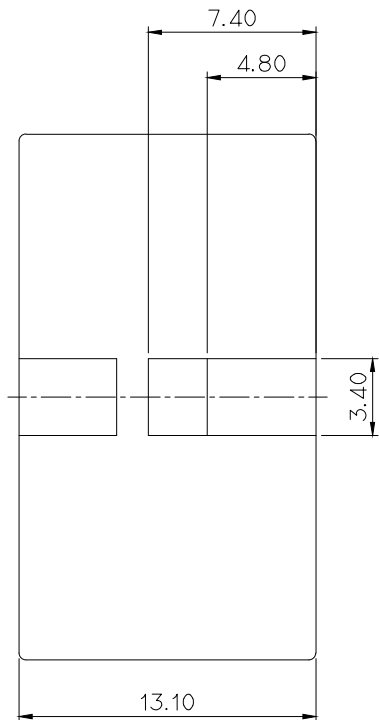
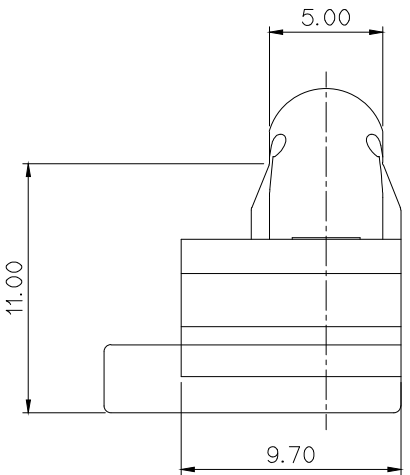
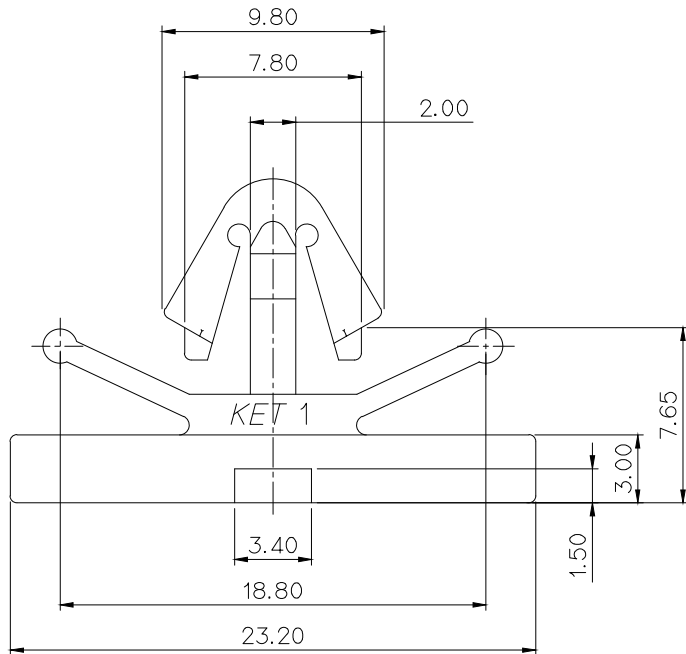
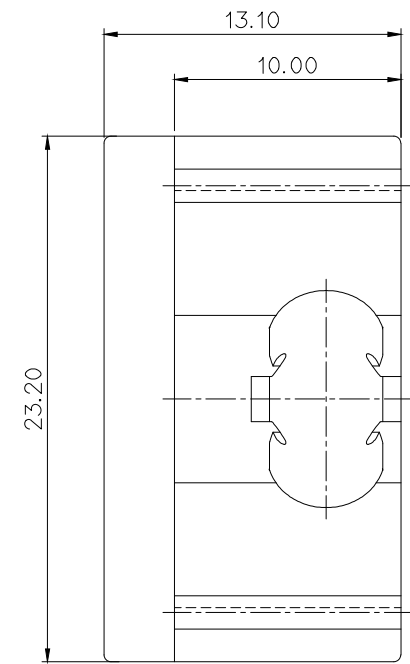


PRODUCTION DRAWING

NO.	MATERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11	ORANGE	

주 기

1. 지시하지 않은 변경 R은 0.3로 한다
2. 제품기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것
3. CLIP INSERTION FORCE : 5Kgf 이하
RETENTION FORCE : 5Kgf 이상
4. 적용 HOUSING : 090 CONNECTOR(MG620061)
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII
TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. CLIP INSERTION FORCE : 5Kgf MAX
RETENTION FORCE : 5Kgf MIN
4. APPLICABLE HOUSING : 090 CONNECTOR(MG620061)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,
MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs)
SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV
DIRECTIVE & RoHS REGULATION.

APPROVED
2018-12-10
KOREA ELECTRIC TERMINAL CO., LTD. Korea Electric Te rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.2	SCALE 4/1	PART NO. MG630460
DR.	KWON 95.3.30		CHK.	CHOSH			PART NAME		
CHK.	JJH		APP.	JWK			090 HSG CLIP (18P)		