





GENERAL TOLERANCE (HOUSING)							USED ON
1MAX	5MAX	10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.10	±0.15	±0.20	±0.25	±0.30	±30°	0.10	






SEC. C-C




VIEW "X"




VIEW "W"

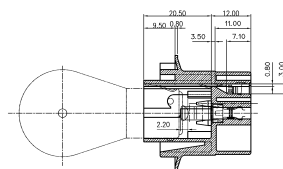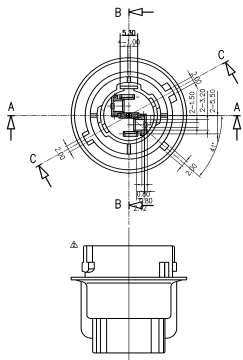


SEC. B-B




SEC. A-A



REAR VIEW



VIEW "Z"



VIEW "Y"

- 주 기
- | |
|-----------------------------------|
| 1. 지시하지 않은 표시리본형(R)은 0.5 |
| 2. 기밀성 유해한 및 변형할이 없을 것. |
| 3. MATERIAL: NYLON |
| 4. COLOR: LIGHT GRAY |
| 5. 적출 TERMINAL : ST 760520(EARTH) |
| ST 760521(POSITIVE) |



				ATTENTION: SEE TABLE	 KET (INCORPORATED) KETEK ELECTRIC TETARUM CO., LTD.
				POSITION SEE TABLE	
				WIRE RANGE	
				INSULATION	
					GRADE
					TITLE
REF	REVISIONS REQUIRED	NO.	DATE	DESIGN	PART NO.
OK	SJK 93.03.18	OK		±0.2	N0630486
		APP.		2/1	
				FAST NUTS	
					RCL B/HOLDER NO.2-DOUBLE