


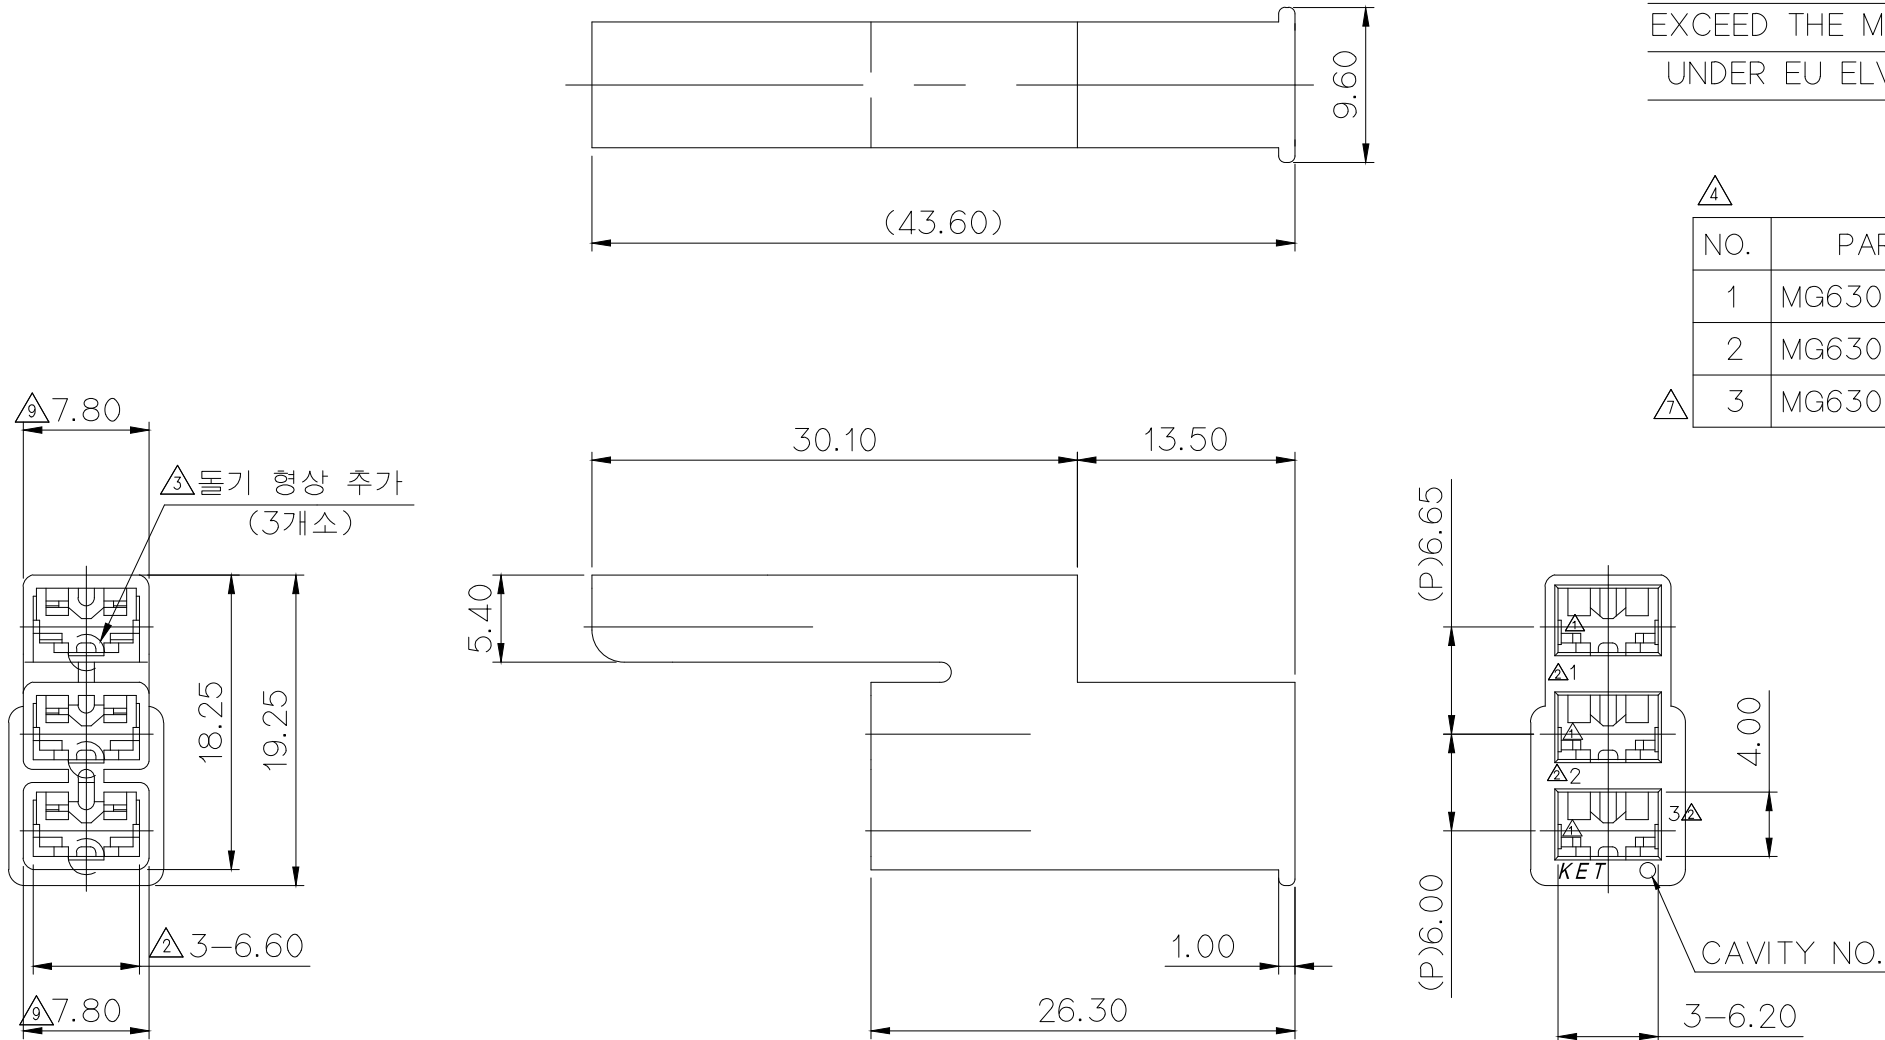

△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730573-3/574-3/575-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

△4	NO.	PART NO.	MATERIAL	FINISH
	1	MG630590	NYLON66 (V-2)	NATURAL
	2	MG630590R	NYLON66 (V-0)	△6NATURAL, RED
△4	3	MG630590C	NYLON66 (GWIT)	NATURAL,△8YELLOW

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730573-3/574-3/575-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△9	ECO-1701-249 근거 도면 재작성	PSH	KSH	BUC	'17.01.11
△8	ECO-1610-422 근거 도면 재작성	SMG	KSH	BUC	'16.10.26
△7	ECO-1610-286 근거 도면 재작성	SMG	KSH	BUC	'16.10.19
△6	ECO-1504-468 근거 도면 재작성	LCM	KSH	BUC	'15.04.28
△5	설계사양변경(S110128)근거 도면 재작성	PJM	KSH	BUC	'11.04.28
△4	시방변경"SO70208"의한변경	PJM			'07.09.11
△3	시방변경"SO70038"의한변경	KSH			'07.02.08
△2	시방변경"000094"의한변경	KO			'00.04.07
△1	고객 요구 사항 변경	KO			'95.11.14
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	OH '93.12.28	CHK.			
CHK.	S. w k e r	APP.			

MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
FINISH		 SEE TABLE	
WIRE RANGE			
INSULATION			
		CLASS	
		TYPE	187 P-LOCK
TOLERANCE EXCEPT AS NOTED		SEE TABLE	
SCALE		2/1	
		PART NO.	   MG630590*
PART NAME		.187 P-LOCK HOUSING 3P (NEW)	

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK