
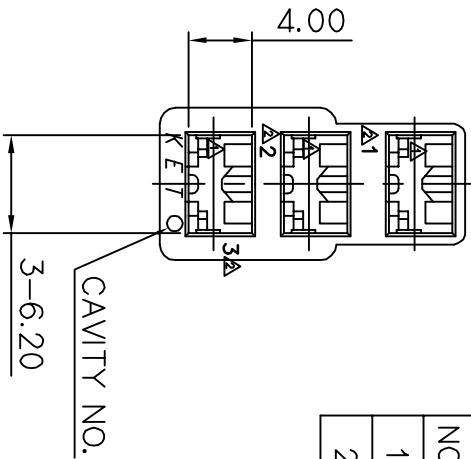
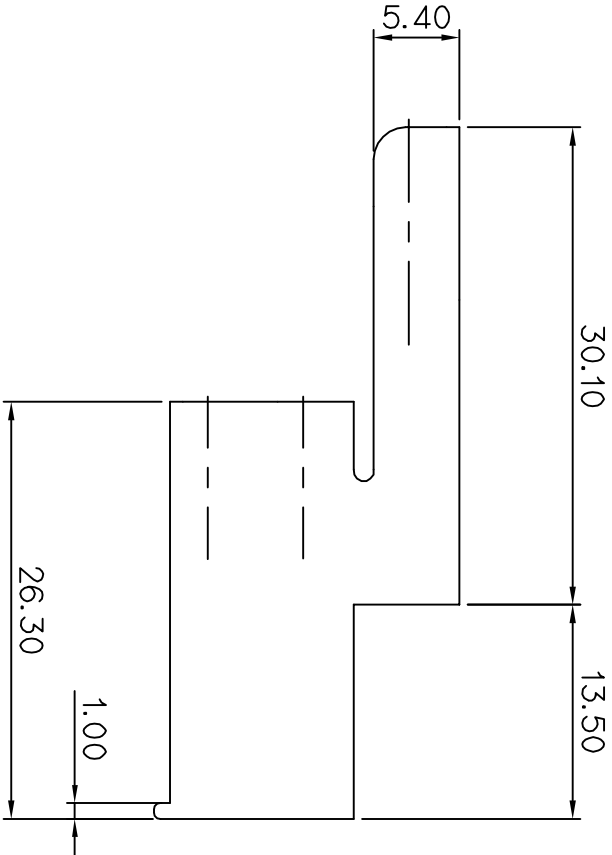
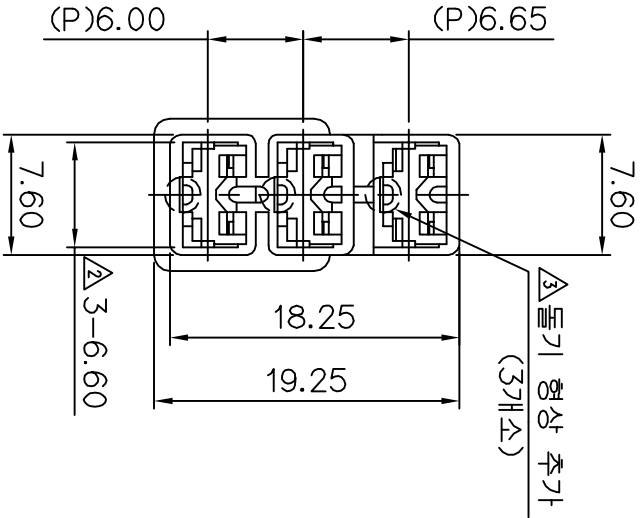


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730573-3/574-3/575-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

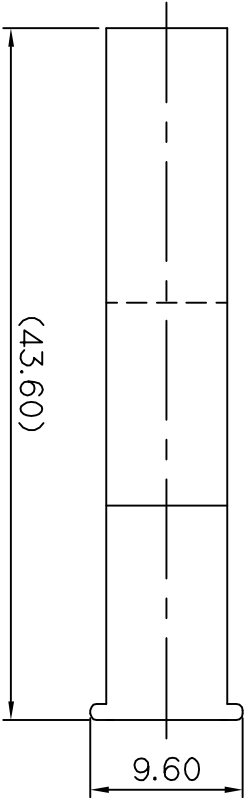

NO.	PART NO.	MATERIAL	FINISH
1	MG630590	NYLON66 (V-2)	NATURAL
2	MG630590R	NYLON66 (V-0)	△NATURAL,RED

- 주 기**
1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST730573-3/574-3/575-3
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

				ISSUE MARK		
△ECO-1504-468 근거 도면 제작성	LCM	KSH	BUC	'15.04.28		
△설계시정변경(S110128)근거 도면 제작성	PJM	KSH	BUC	'11.04.28		
△시정변경"S070208"의정변경	PJM			'07.09.11		
△시정변경"S070036"의정변경	KSH			'07.02.08		
△시정변경"000094"의정변경	KO			'00.04.07		
△고객 요구 사항 변경	KO			'95.11.14		
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE
DR.	OH '93.12.28		CHK.			
CHK.	S. W. Peter		APP.		W. J. Park	
PART NAME			TOLERANCE EXCEPT AS NOTED			
.187 P-LOCK HOUSING 3P (NEW)			SEE TABLE		SCALE 2/1	PART NO. MG630590/△MG630590R