


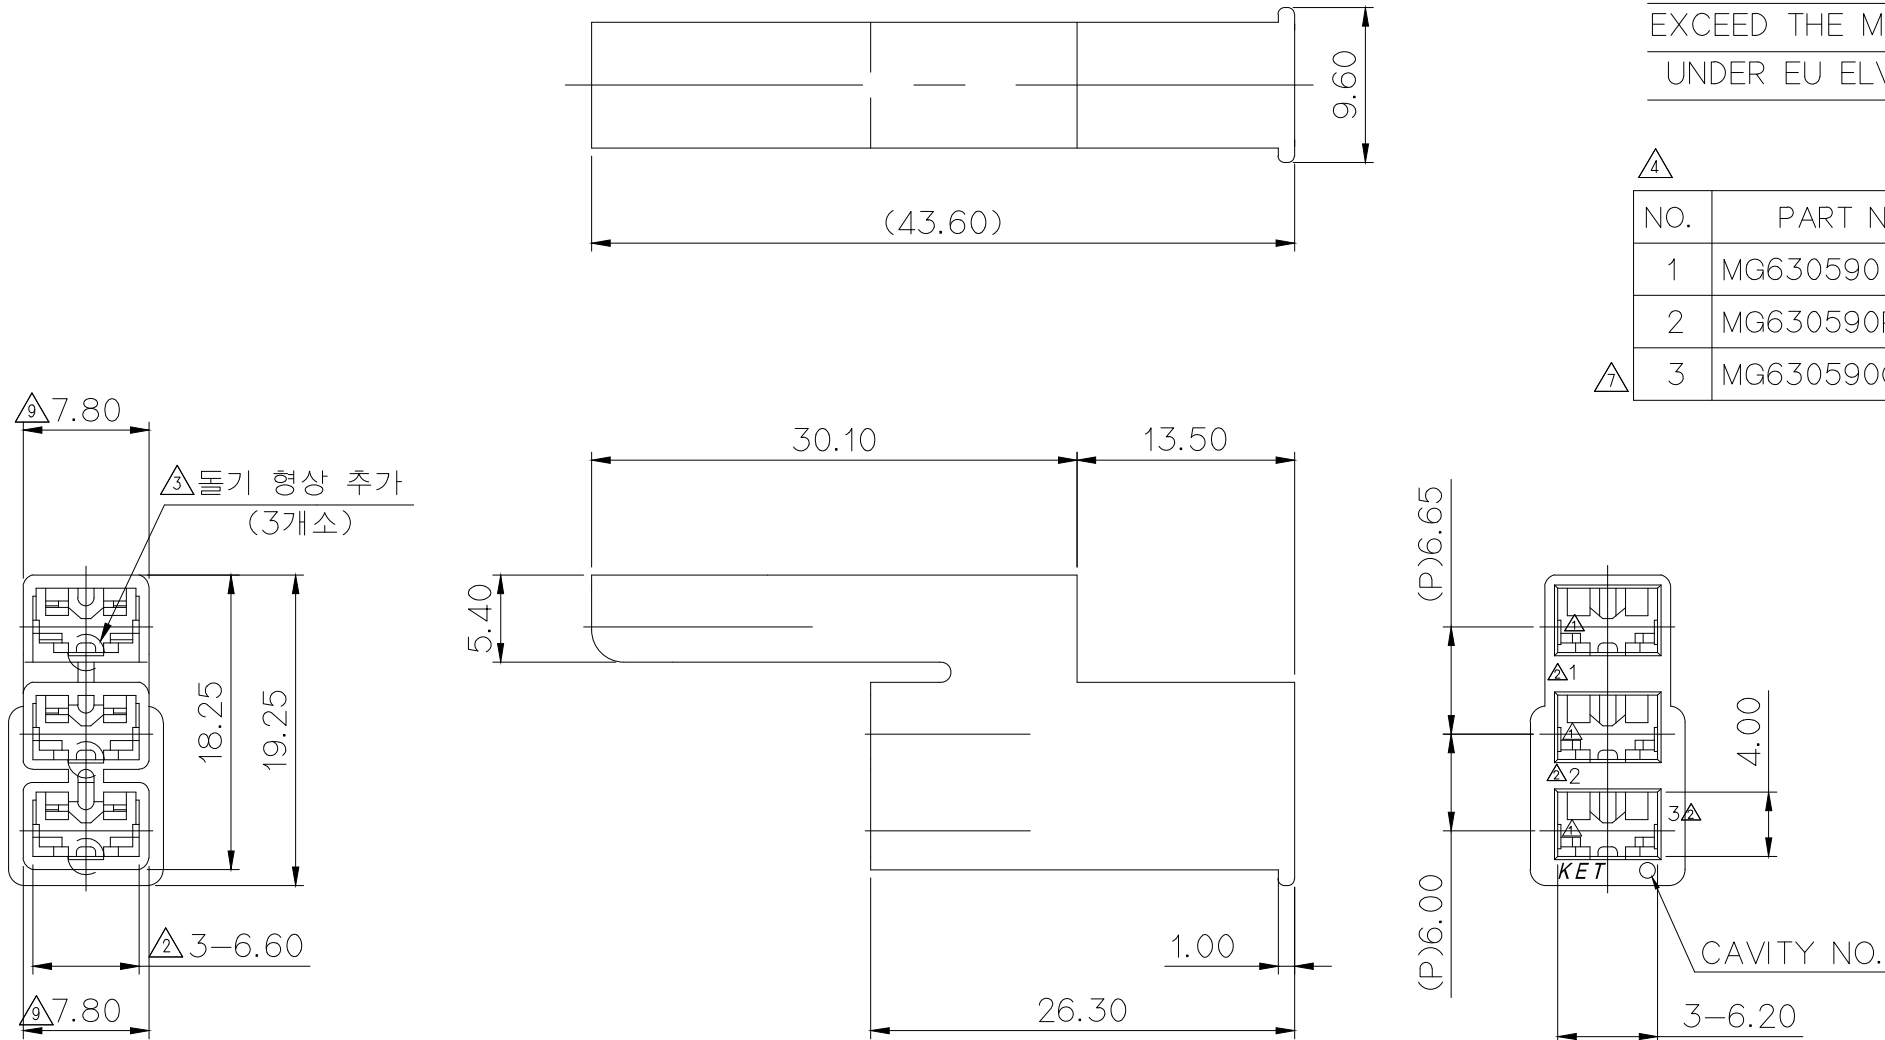

△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE TERMINAL : ST730573-3/574-3/575-3
- 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

△NO.	PART NO.	MATERIAL	FINISH
1	MG630590	NYLON66 (V-2)	NATURAL
2	MG630590R	NYLON66 (V-0)	△NATURAL, RED, △BLUE, GREEN
△3	MG630590C	NYLON66 (GWIT)	NATURAL, △YELLOW

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730573-3/574-3/575-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

△10	ECO-2309-064 근거 도면 재작성	LYS	PSH	KSH	'23.09.07
△9	ECO-1701-249 근거 도면 재작성	PSH	KSH	BUC	'17.01.11
△8	ECO-1610-422 근거 도면 재작성	SMG	KSH	BUC	'16.10.26
△7	ECO-1610-286 근거 도면 재작성	SMG	KSH	BUC	'16.10.19
△6	ECO-1504-468 근거 도면 재작성	LCM	KSH	BUC	'15.04.28
△5	설계사양변경(S110128)근거 도면 재작성	PJM	KSH	BUC	'11.04.28
△4	시방변경"S070208"의한변경	PJM			'07.09.11
△3	시방변경"S070038"의한변경	KSH			'07.02.08
△2	시방변경"000094"의한변경	KO			'00.04.07
△1	고객 요구 사항 변경	KO			'95.11.14
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	OH '93.12.28	CHK.			
CHK.	S. w k e r	APP.			

MATERIAL		SEE TABLE	 KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
FINISH		△SEE TABLE		
WIRE RANGE				
INSULATION				
			CLASS	
			TYPE	187 P—LOCK
TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE	PART NO.
			2 / 1	   MG630590*
PART NAME				
.187 P—LOCK HOUSING 3P (NEW)				

APPROVED

2023-10-20

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK