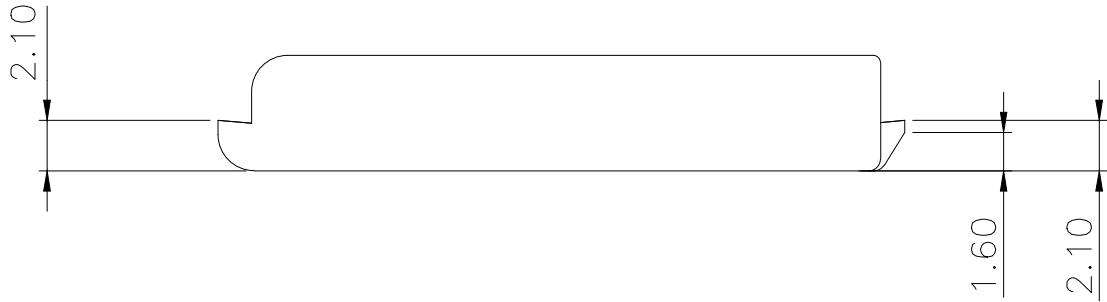
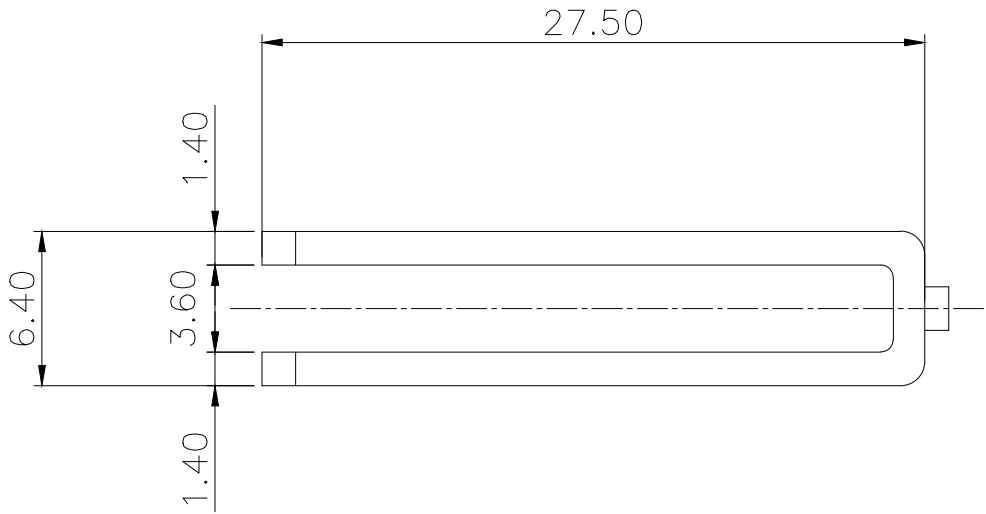



GENERAL TOLERANCE (HOUSING)									USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.9	±1.4	±30'	

NOTE

- 1.UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. APPLICABLE HOUSING :MG610567, MG620568
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

주 기

1. 지시하지 않은 반경 R은 0.3로 한다
2. 적용 HOUSING: MG610567, MG620568
3. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

						MATERIAL	PBT	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	BROWN	
						WIRE RANGE		
						INSULATION		
LTR	REVISION RECORD	DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.2	SCALE 3/1	PART NO. MG630611
DR. RHO. 93.3.28		CHK. JJH		3/28	PART NAME			
CHK. KCC		APP.		2507 REAR HOLDER 14P				

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK