
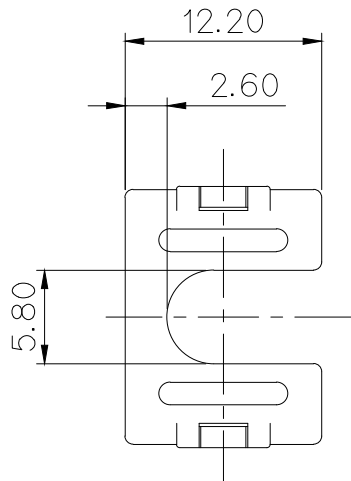
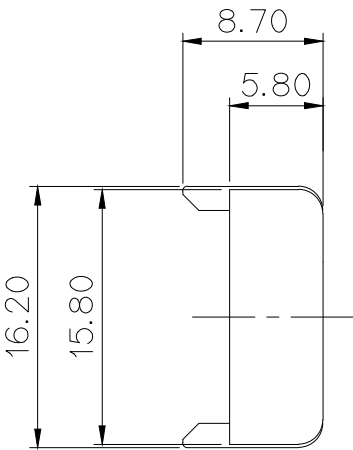
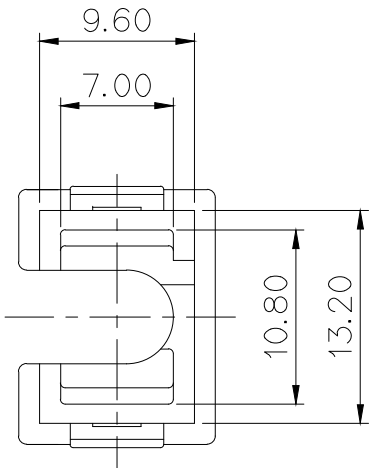


NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS
TO BE 0.5 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG620659
4. GENERAL TOLERANCE OF LESS THAN 10mm IS NOT SPECIFIED 0.1.
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY,
CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT
EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION
PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.



주 기

1. 지시하지 않은 반경 R은 0.5로 한다.
2. 기능상 유해한 BURR 및 변형등이 없을것.
3. 적용 HOUSING: MG620659
4. 지정하지 않은 10mm이하의 일반공차는 ±0.1로 할것.
5. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬,
PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

GENERAL TOLERANCE (HOUSING)

10 MAX	30MAX	50 MAX	70 MAX	100 MAX	120 MAX	250 MAX	250 VR	ANGLE	ECCENT	USED ON
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.40	±30’	0.1	

NO.	MATERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

					MATERIAL		SEE NOTE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		SEE NOTE	
③	설계사양변경(S060015)큰거 도면 제작성	LDG		06.01.12	WIRE RANGE			CLASS
②	95년 2월 검토관련 수정(1곳)	MOOK	—	96.06.20	INSULATION			TYPE
①	COLOR 변경	MOOK	—	95.12.26	TOLERANCE EXCEPT AS NOTED		SCALE 2/1	PART NO. MG630661
LTR	REVISION RECORD	DR.	CHK.	APP.				
DR.	SIK. 94.09.12	CHK.		3/28	PART NAME			
CHK.	25.08.06	3/28	APP.		375 1P REC REAR HOLDER			

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK