

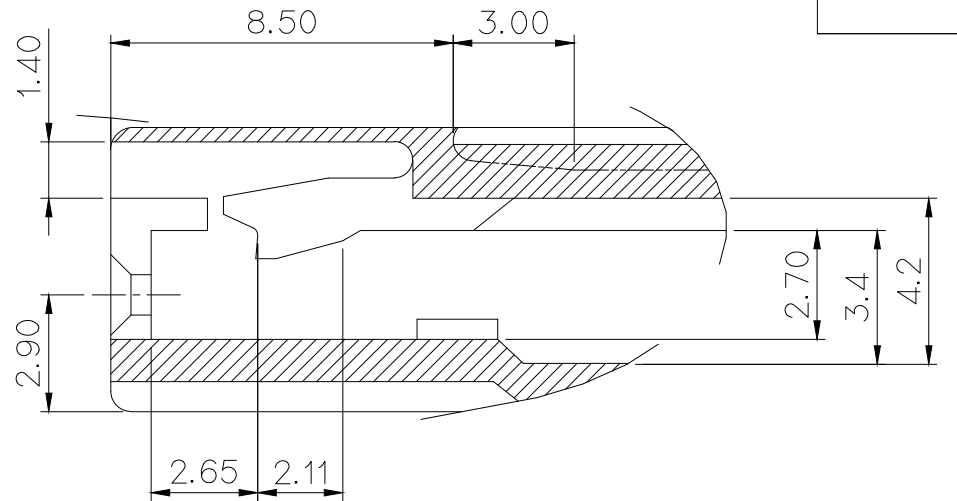
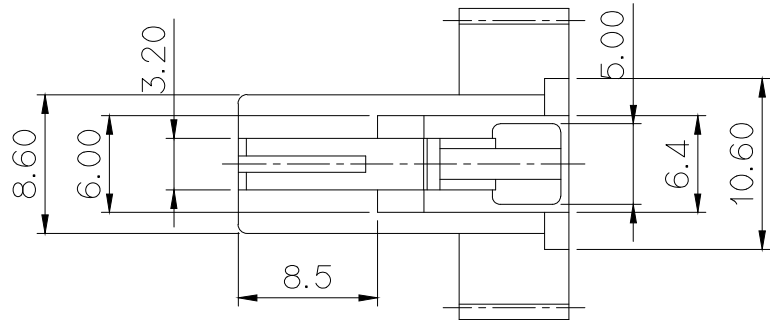



적용 BRACKET형상

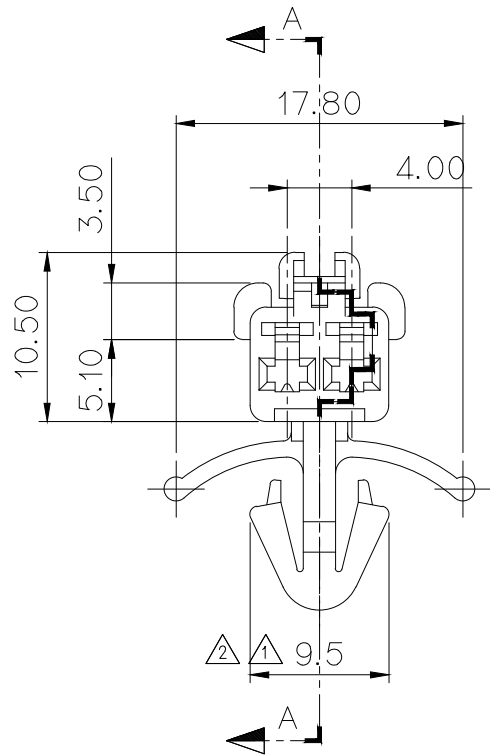

DETAIL B (5/1)
(SECTION A-A)

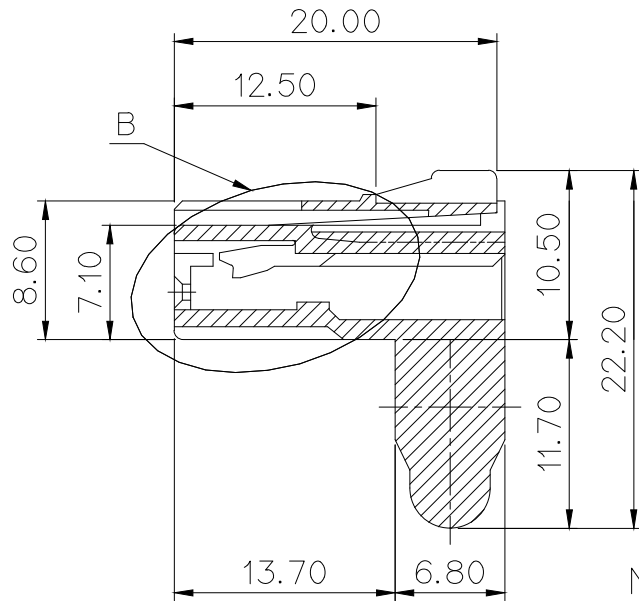


SECTION A-A

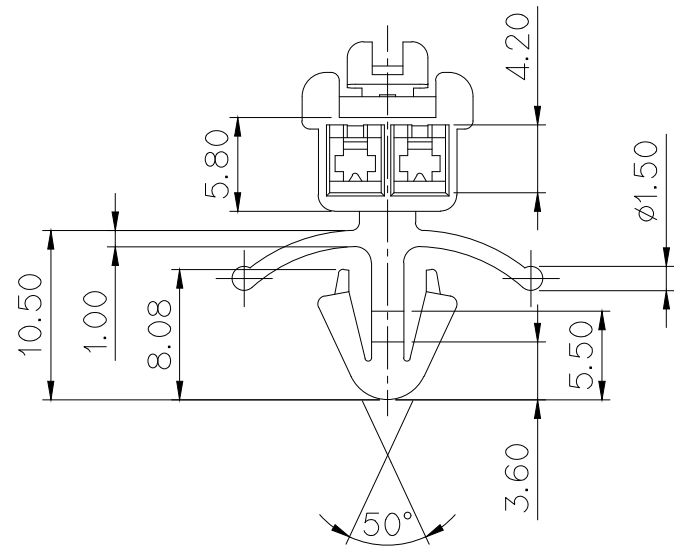

주 기

- 기능상 유해한 BURR및 변형등이 없을것.
- 적용 HOUSING : MG620490
- 적용 TERMINAL : ST730365,366,431
- 적용 BRACKET : (t=1.0-2.4 / HOLE SIZE = ϕ 7.0 $\pm$ 0.1)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

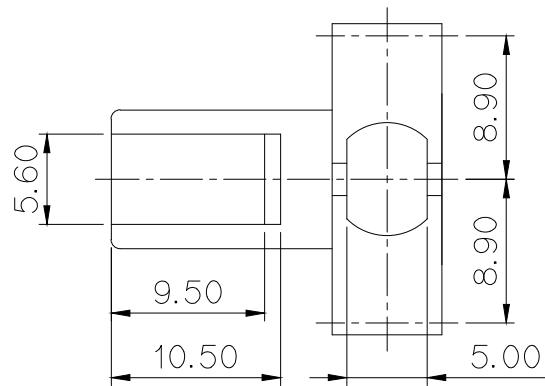

NOTE

- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE CONNECTOR: MG620490
- APPLICABLE TERMINAL: ST730365,366,431
- APPLICABLE BRACKET : (t=1.0-2.4 / HOLE SIZE = ϕ 7.0 $\pm$ 0.1)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL		NYLON66		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH		NATURAL			
					WIRE RANGE		CLASS			K I A
					INSULATION		TYPE			(S,T-CAR)
	검.보 근거 도면 수정 (1곳)									
	도면 변경 (1곳)									
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.2	SCALE	PART NO.
	DR. KKJ 94.7.23		CHK.					2/1	MG 630678	
CHK. JWK			APP. Watanabe			PART NAME				
						.250 4P PLUG HS'G CLIP				