
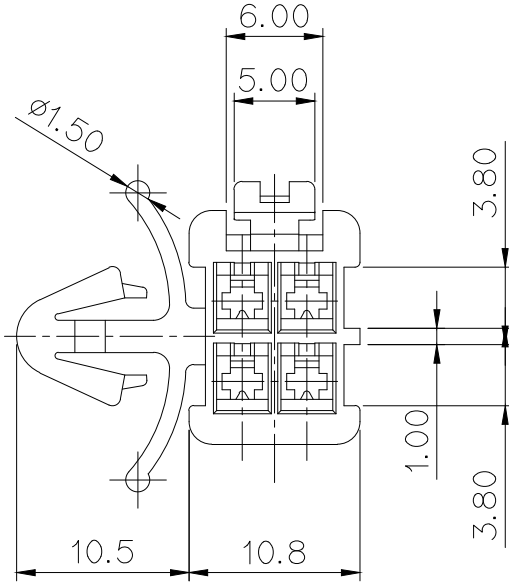
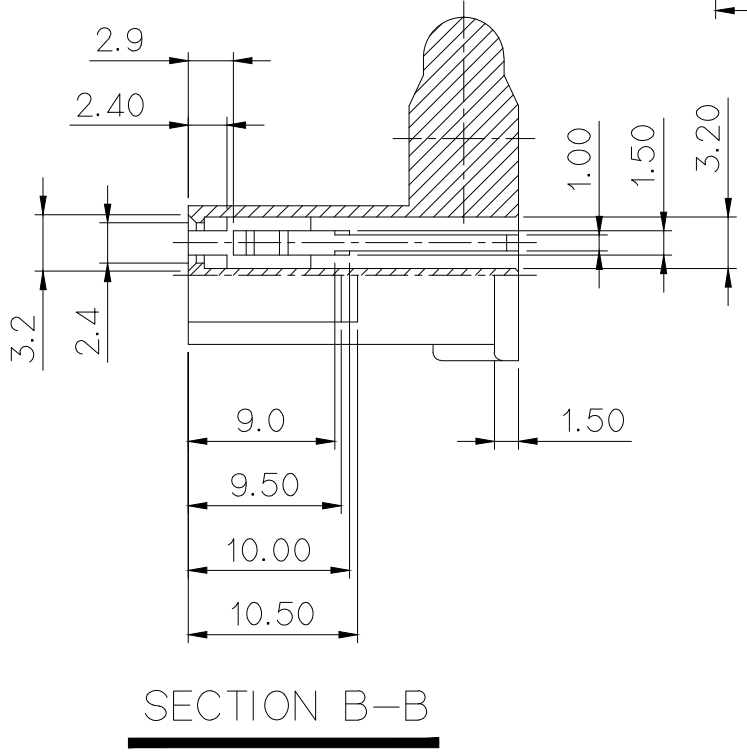
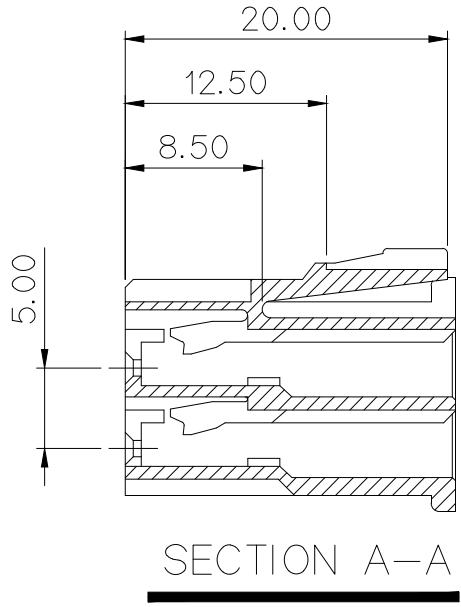
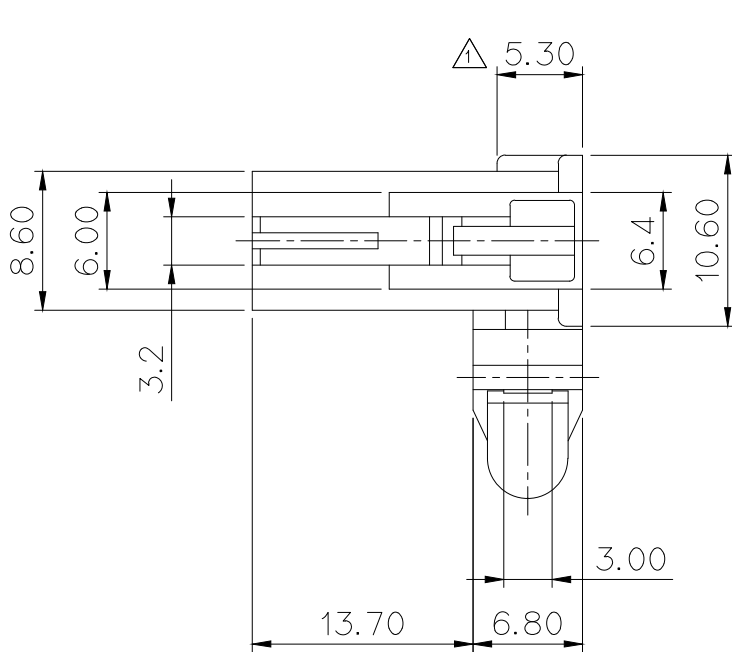
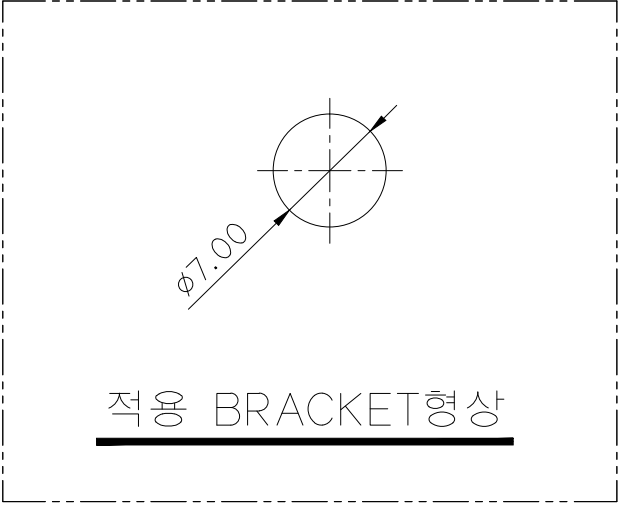


NO.	MATERIAL	COLOR
* 0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

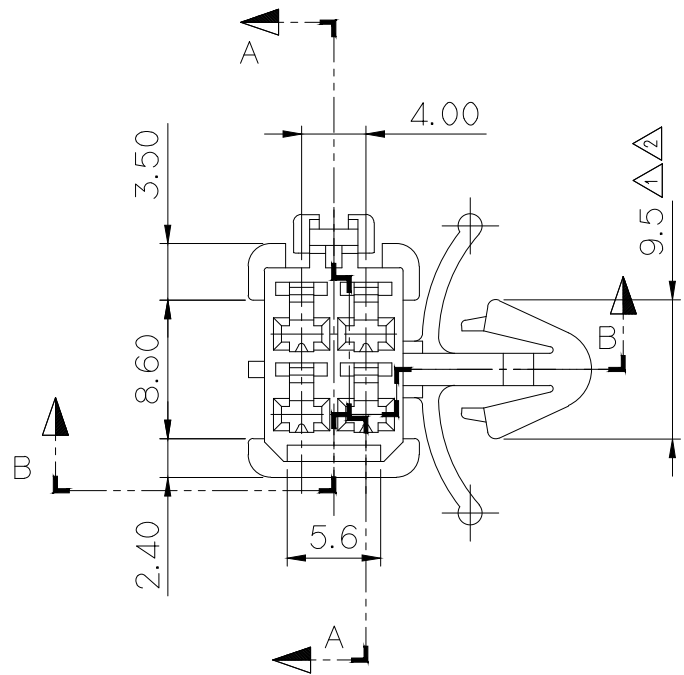

- NOTE
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE CONNECTOR: MG620160
 - APPLICABLE TERMINAL: ST730365-3, ST730366-3, ST730431-3
 - APPLICABLE BRACKET : (t=1.0-2.4 / HOLE SIZE=ø7.0±0.1)
 - 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

- 주 기
- 기능상 유해한 BURR및 변형등이 없을것.
 - 적용 HOUSING : MG620160
 - 적용 TERMINAL : ST730365-3, ST730366-3, ST730431-3
 - 적용 BRACKET : (t=1.0-2.4 / HOLE SIZE=ø7.0±0.1)
 - 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED
2020-12-10
KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH SEE TABLE			
3	ECO-2003-431 근거 도면 재작성	SDI	KSC	CJH	'20.03.25	WIRE RANGE			CLASS K I A
2	검.보 근거 도면 수정 (1곳)			Watanabe		INSULATION			TYPE (S,T-CAR)
1	검.보 근거 치수 변경 (2곳)			Watanabe					
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.2	SCALE 2/1	PART NO. MG630680
DR. KKJ, 94.7.23		CHK. JJH, 94.7.25							
CHK. JWK		APP. Watanabe		.090 PLUG HOUSING 4P CLIP					

PART NO.	MG630680
----------	----------