



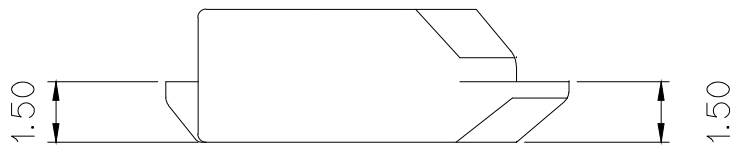

NO.	MATERIAL	COLOR
0	P B T	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
* 40		DARK GRAY
* 41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
* 7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

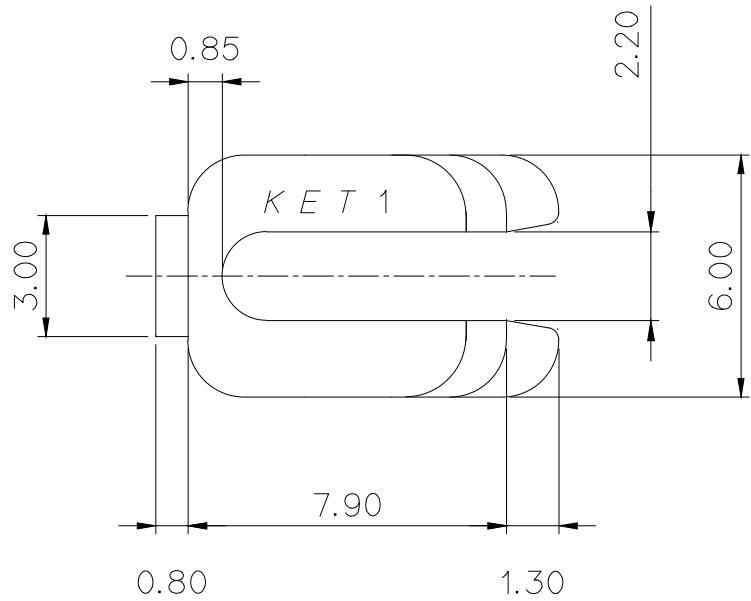

NOTE



- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.2
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING :SSD-2P PLUG HS'G (MG610705) SSD-2P REC. HS'G (MG640707)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE

주 기

- 지시하지 않은 반경 R은 0.2으로 한다.
- 기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 적용 HOUSING 제품:SSD-2P PLUG HS'G (MG610705) SSD-2P REC. HS'G (MG640707)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH  SEE TABLE			
					WIRE RANGE			CLASS
					INSULATION			TYPE
	ECO-1507-128 근거 도면 제작성 (복상 테이블 추가)	SY.L	CKY	LSY	'15.07.07			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED ±0.20	SCALE 5/1	PART NO. MG630708
DR. JANG 97.12.02		CHK.KKJ 12.3		CJH 12.4				
CHK. S.I.JANG 12.04		APP. Watanabe 12.5		SSD-2P REAR HOLDER				

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'	0.1	

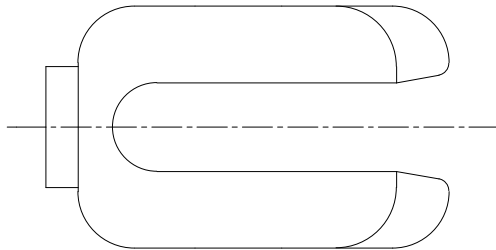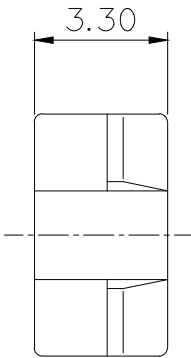

APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK