

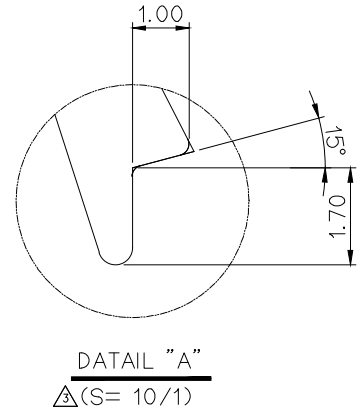
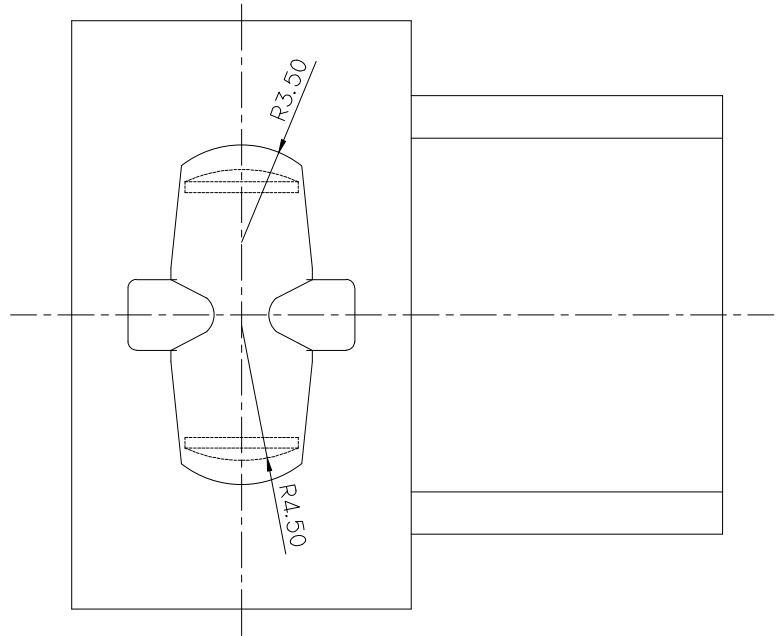
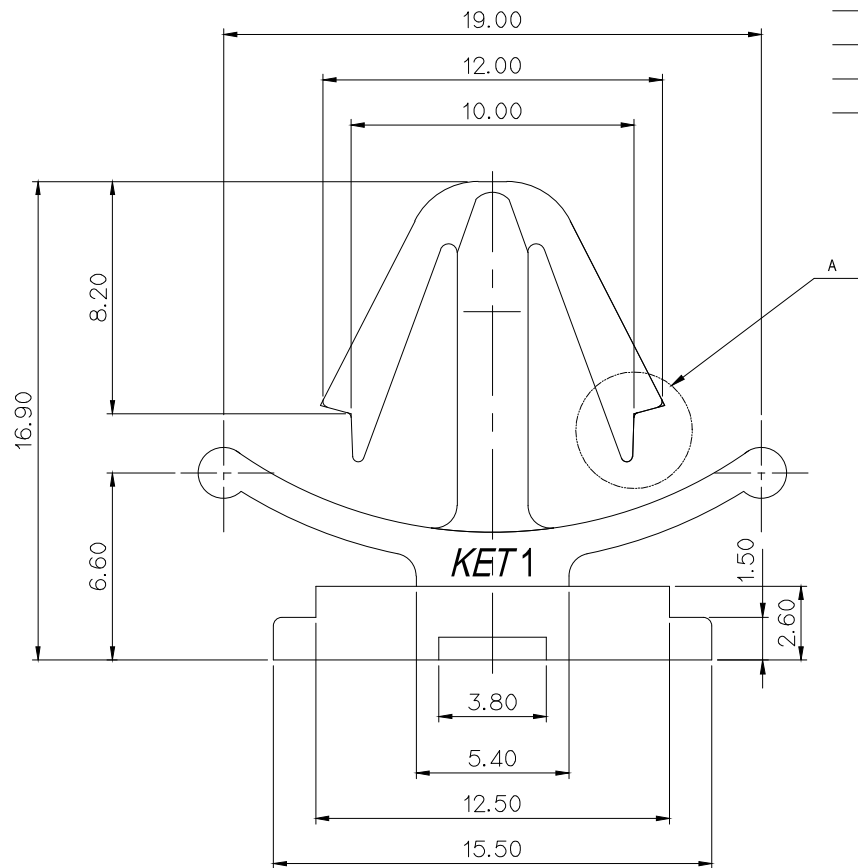


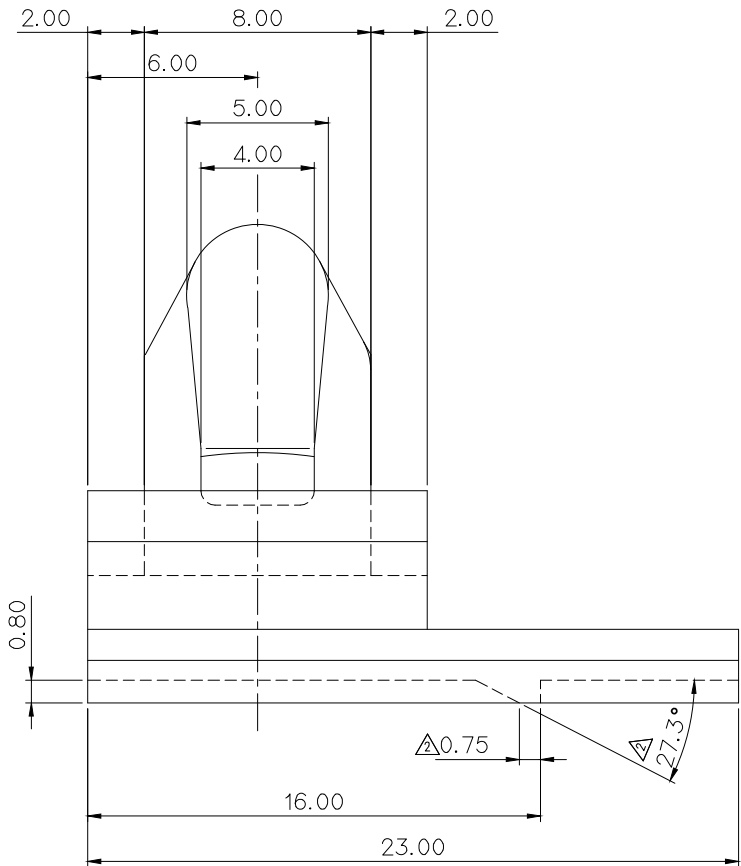

1. 지시하지 않은 반경 R은 0.3로 한다.
2. 기능상 유해한 BURR 및 WELDLINE 없을 것.
3. 적용 HOUSING : SDL SWP CONNECTOR
4. KET 문자 :  기울기 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO.:  기울기 0° (H; 0.1~0.2, SIZE; 1.5)
5. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정된 최대 허용 농도를 초과해서는 안된다.

1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING :SDL SWP CONNECTOR
4. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5) CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.5)
5. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

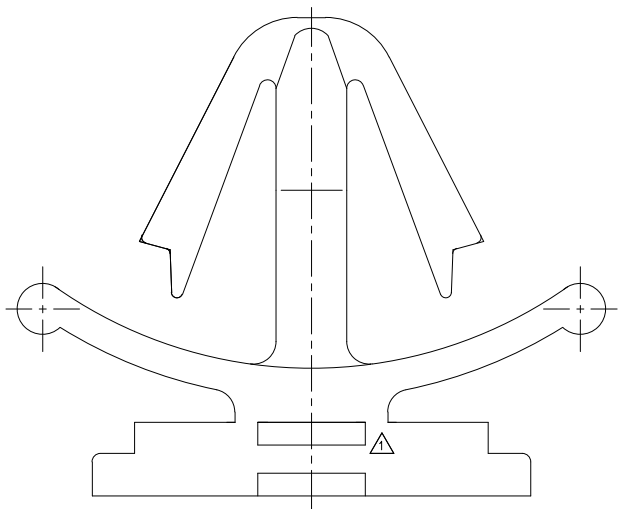

	NO.	MATERIAL	COLOR
△ *	0	PA66	NATURAL
	1		RED
	2		BLUE
	20		JADE
	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
11	ORANGE		



**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL	SEE TABLE	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., L
						FINISH	SEE TABLE	
	ECO-1708~228 근거 도면 제작형	SY.L	KMH	CJH	17.08.17	WIRE RANGE		CLASS
	삽입력 감소를 위한 형상 변경 (3곳)				97.12.10	INSULATION		TYPE
	수축 방지 HOLE				95.06.23			58L
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	±0.2	SCALE 5/1
DR.	KWON. 1995.04.13	CHK.				PART NAME		PART NO. MG630778
CHK.	JWK. 04.13	APP.	Watanabe	04.15				375 CLIP (ø 9.0 HOLE TYPE)