
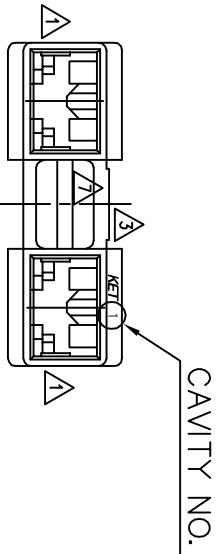
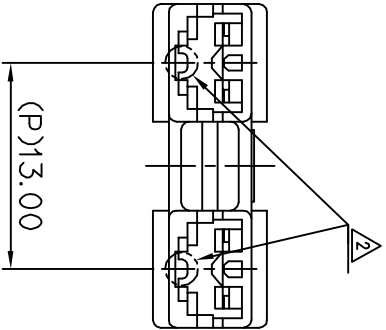
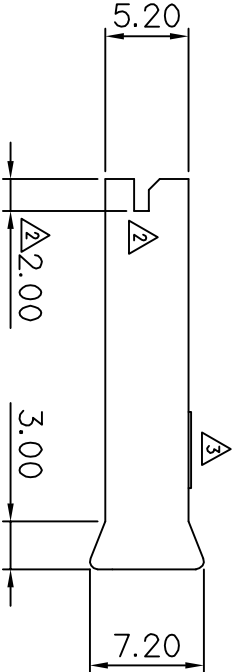


GENERAL TOLERANCE (HOUSING)				USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

SEE TABLE

PART NO.

- NOTE
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 - APPLICABLE TERMINAL : ST730567-3/568-3/569-3
 - 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & ROHS REGULATION

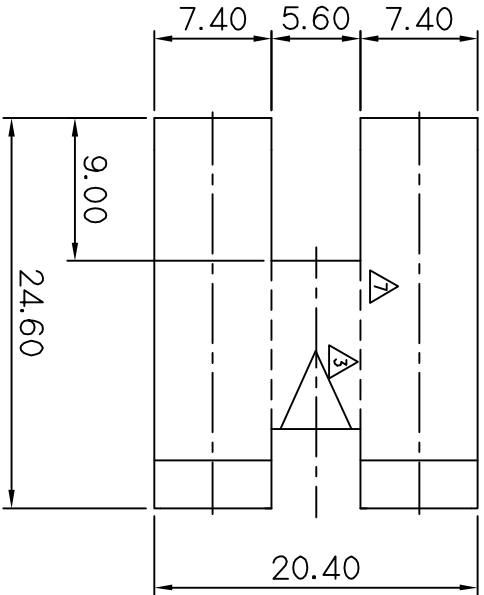

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730567-3/568-3/569-3
- 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 ROHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
5	BLACK

P/NO	MATERIAL
MG630839	PA66(V0)
MG630839P	PET+PC(GW17)
MG632976	PBT(V0)

ECO-1409-113 근거 도면 제작성	LCM	KSH	BUC	14.09.19	ISSUE MARK KIEP KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
최대시양변경(S110128)근거 도면 제작성	PJM			11.04.28	
시양변경*070107*역거 도면제작성	PJM			05.07.01	
시양변경*050150*역거 도면제작성	MIN			03.12.01	
시양변경*030210*역거 도면제작성	SY			03.02.05	
시양변경*030021*역거 도면제작성	SY			01.05.03	MATERIAL SEE TABLE FINISH SEE TABLE WIRE RANGE INSULATION CLASS TYPE 187 P-LOCK
형상 변경 (불기 추가)	OJM			97.04.07	
형상 변경	KO			95.11.18	
고려 요구 사항 변경	KO				
REVISION RECORD	DR.	CHK.	APP.	DATE	
DR.	95.02.25	CHK.	SLK	95.02.25	TOLERANCE AS NOTED SEE TABLE SCALE 2/1 PART NO. SEE TABLE
CHK.	S. W. Lee 3/12	APP.	H. Park 3/12		
187 P-LOCK 2P HOUSING (P:13mm)					

CUSTOMER DRAWING

(DIMENSIONS IN MM)