




△GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE TERMINAL : ST730567-3/568-3/569-3
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 터미널 : ST730567-3/568-3/569-3
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

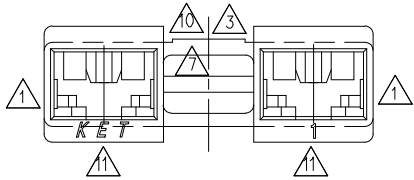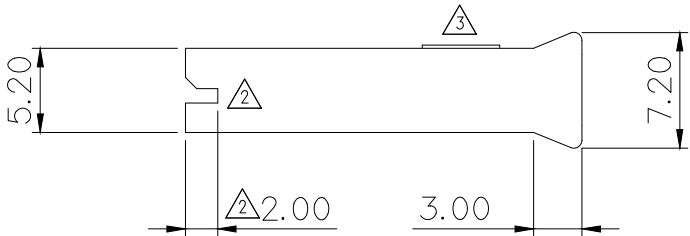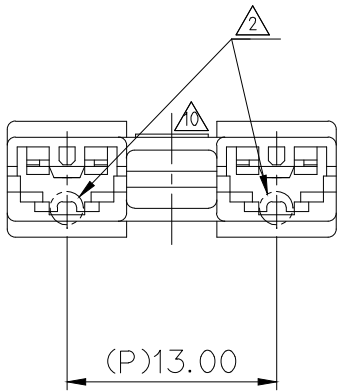

△9		△4 △5 △6 △9	
NO.	COLOR	P/NO	MATERIAL
* 0	NATURAL	MG630839	PA66(V0)
1	RED	MG630839P	PET+PC(GWIT)
2	BLUE	MG630839R	PA66(V0)
3	YELLOW	MG632976	PBT(V0)
5	BLACK		

△11	ECO-1611-049 근거 도면 재작성	SMG	KSH	BUC	'16.11.02
△10	ECO-1605-071 근거 도면 재작성	SMG	KSH	BUC	'16.05.16
△9	ECO-1409-113 근거 도면 재작성	LCM	KSH	BUC	'14.09.19
△8	설계사양변경(S110128)근거 도면 재작성	PJM			'11.04.28
△7	시방변경"070107"의거 도면재작성	PJM			'05.07.01
△6	시방변경"050150"의거 도면재작성	MIN			'03.12.01
△5	시방변경"030210"의거 도면재작성	LSY			'03.02.05
△4	시방변경"030021"의거 도면재작성	LSY			'01.05.03
△3	형상변경 (돌기 추가)	OJM			'97.04.07
△2	형상 변경	KO			'95.11.18
△1	고객 요구 사항 변경	KO			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	jw '95.02.25	CHK.	SIK	'95.02.25	
CHK.	S. w 3/2	APP.	W. t 3/2		

MATERIAL	△9SEE TABLE	KOREA ELECTRIC TERMINAL CO., LTD. Electronic Product Development Team	
FINISH	△9SEE TABLE		
WIRE RANGE		CLASS	
INSULATION		TYPE	187 P-LOCK
TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE	2/1
PART NAME	187 P-LOCK 2P HOUSING (P:13mm)		

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK