
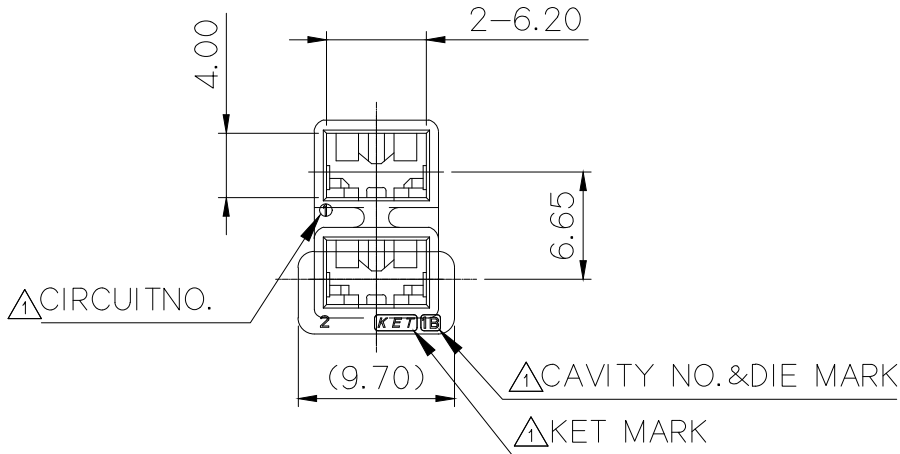
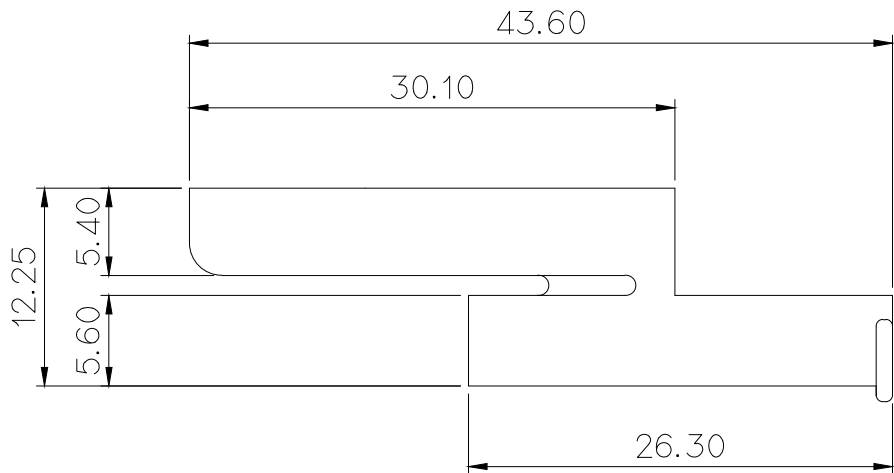


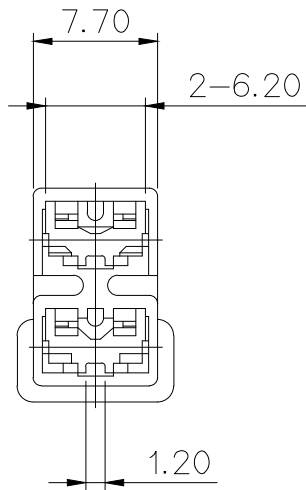

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 터미널 : ST730567-3/568-3/569-3
- 제품 내 함유된 10대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs, DEHP, BBP, DBP, DIBP)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	50MAX	100MAX	100VR	()	SEE NOTE
±0.25	±0.35	±0.55	±0.95	±1.0	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPICABLE TERMINAL : ST730567-3/568-3/569-3
- 10HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs, DEHP, BBP, DBP, DIBP) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

-.PART NO, * 표시는 색상 표시 임.

NO.	COLOR
0	NATURAL
1	RED
2	BLUE
3	YELLOW
4	GRAY
5	BLACK
6	GREEN

APPROVED

2021-04-08

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL PA66(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE		CLASS	
					INSULATION		TYPE 187 P-Lock	
△	ECO-2103-312근거 도면 재작성	YHJ PSH	KSH	'21.03.23	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG630846-*02	
LTR	REVISION RECORD	DR.	CHK.	APP.				
DR. YHJ. '21.03.05		CHK. LCM. '21.03.07						
CHK. PSH. '21.03.07		APP. KSH. '21.03.07		PART NAME 187 P-Lock 2P HOUSING				