
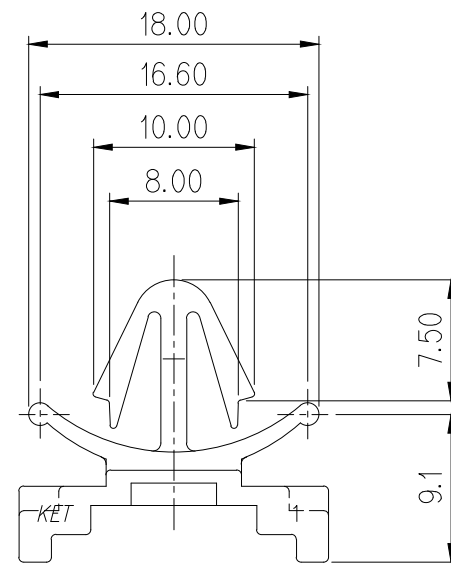
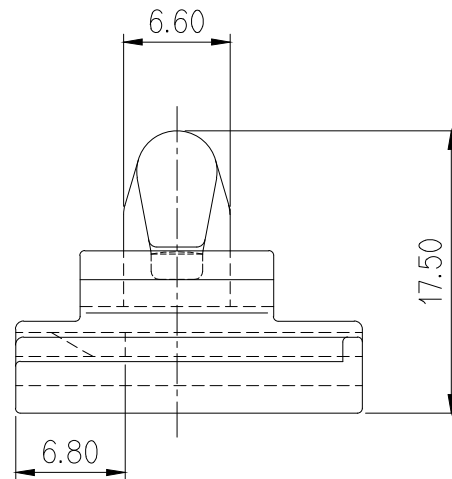
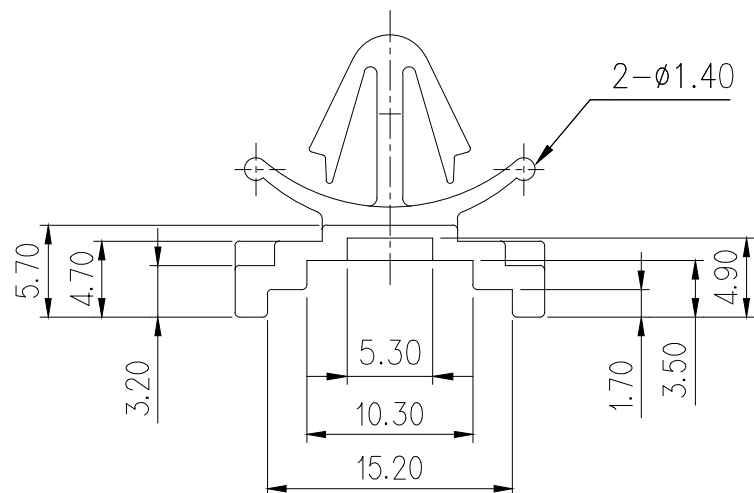
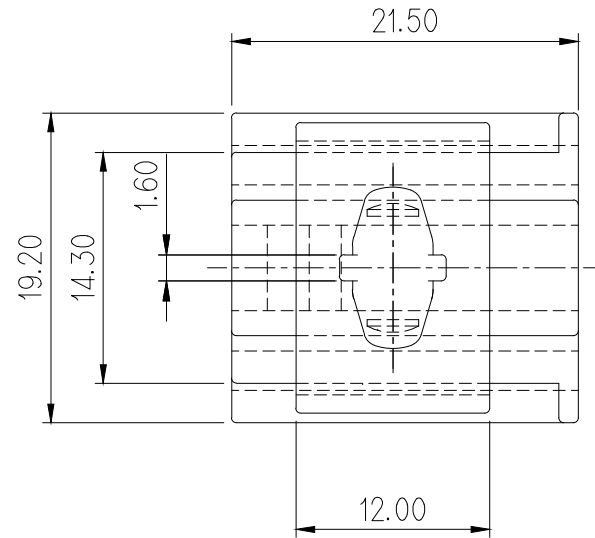


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

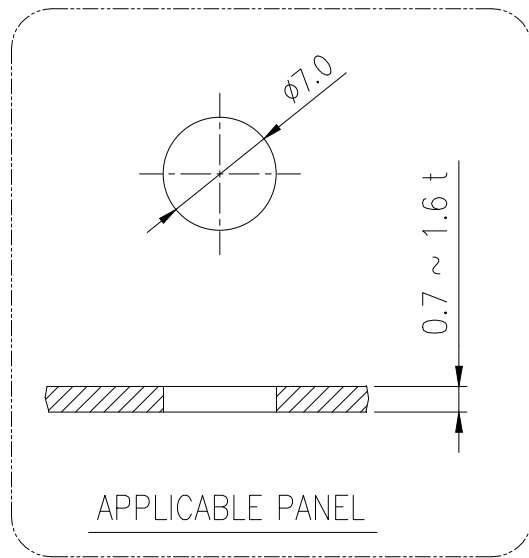

주 기

1. 지시하지 않은 반경 R은 0.3로 한다
2. 기능상 유해한 FLASH, WELDLINE, 결함 등이 없을 것.
3. CLIP INSERTION FORCE : 8 Kgf 이하 $\triangle 1$
RETENSION FORCE : 10 Kgf 이상
4. 적용 HS'G : 090B,2507,1809 CONN'T
5. KET 문자 : 기울기 15°(H; 0.1~0.2, SIZE; 1.0)
CAVITY NO.: 기울기 0°(H; 0.1~0.2, SIZE; 1.0)
6. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NO.	MATERIAL	COLOR
0	NYLON66	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11	ORANGE	

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
3. CLIP INSERTION FORCE : 8 Kgf MAX 
RETENSION FORCE : 10 Kgf MIN
4. APPLICABLE HS'G : 090B,2507,1809 CONN'T
5. KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.0)
CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.0)
6. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	① SEE TABLE	
②	시방 변경 000001 근거 (1곳)	HEO	KKJ		'00.01.17	WIRE RANGE	CLASS	
①	COLOR 및 삽입력 변경	YUN			'96.05.02	INSULATION	TYPE	MODULE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG630973
DR.	YUN 95.12.21	CHK.			12/21	PART NAME	② MODULE CLIP(ø7 정홀)	
CHK.	S. w 	12/21	APP.		12/22			

APPROVED

2018-12-07

**KOREA ELECTRIC
TERMINAL CO., LTD.**
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

IKIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

CLASS _____

TYPE	MODULE
------	--------

PART NO. MG630973

△ MODULE CLIP(ø7 정홀)