






GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 HOUSING : MG610979, 620980
- 3.제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG620979, 620980
5. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

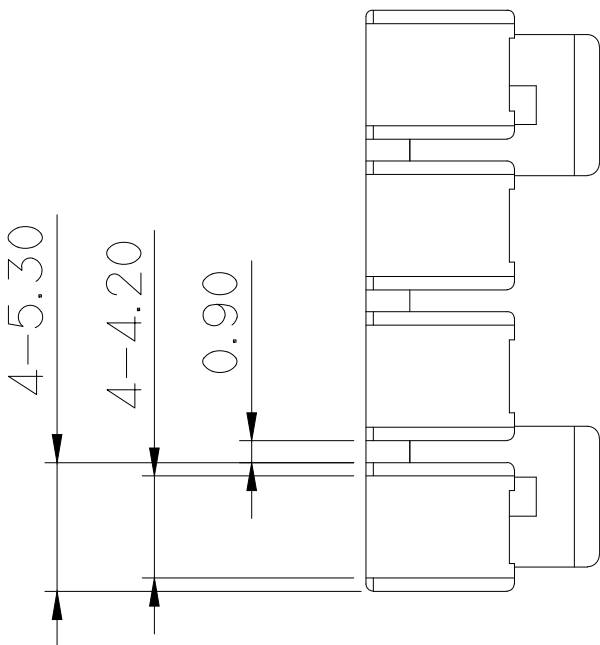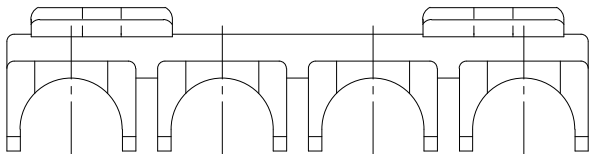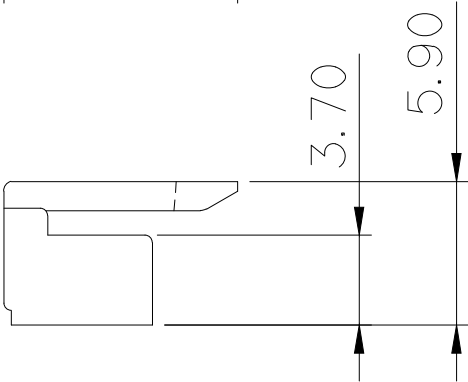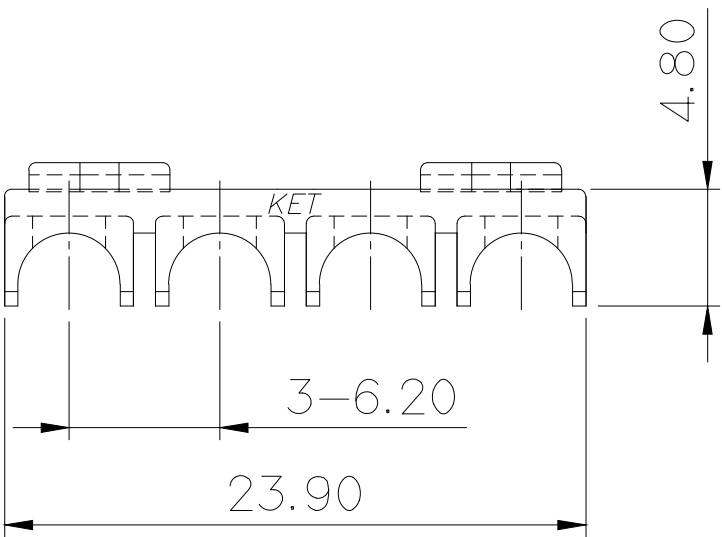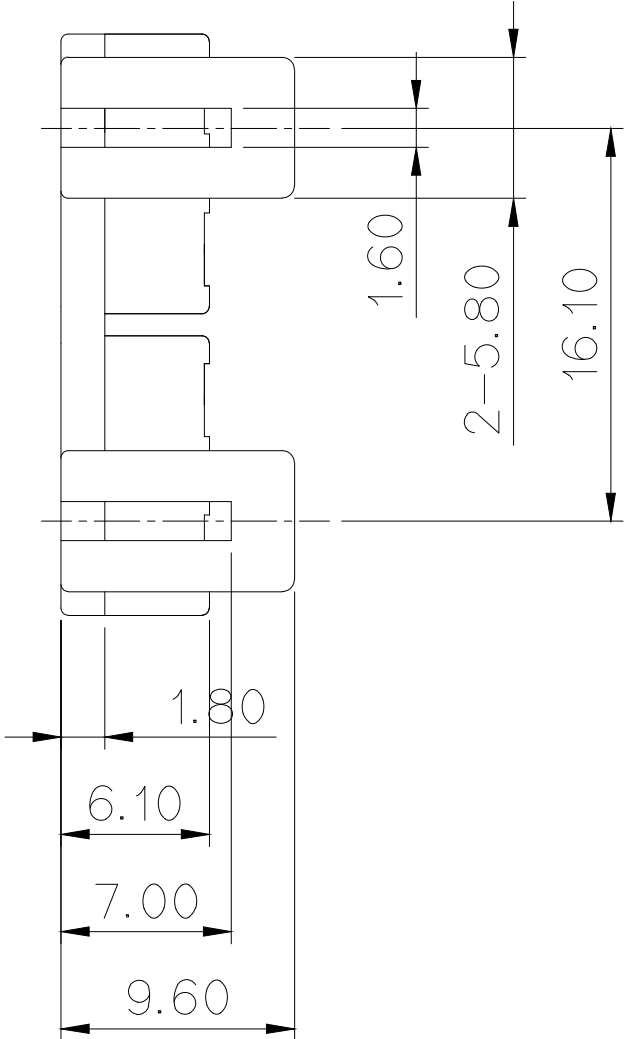


APPROVED

2016-03-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH BLUE			
					WIRE RANGE			
					INSULATION		CLASS	
	설계사양변경”S110128”근거 도면 재작성				”11.04.28		TYPE	
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG630986
DR. KO 95.10.09		CHK. Sik 95.10.09				PART NAME 3220 (EDL) 4P REAR HOLDER		
CHK.   12/26		APP.  12/7						