


GENERAL TOLERANCE (HOUSING)

USED ON

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

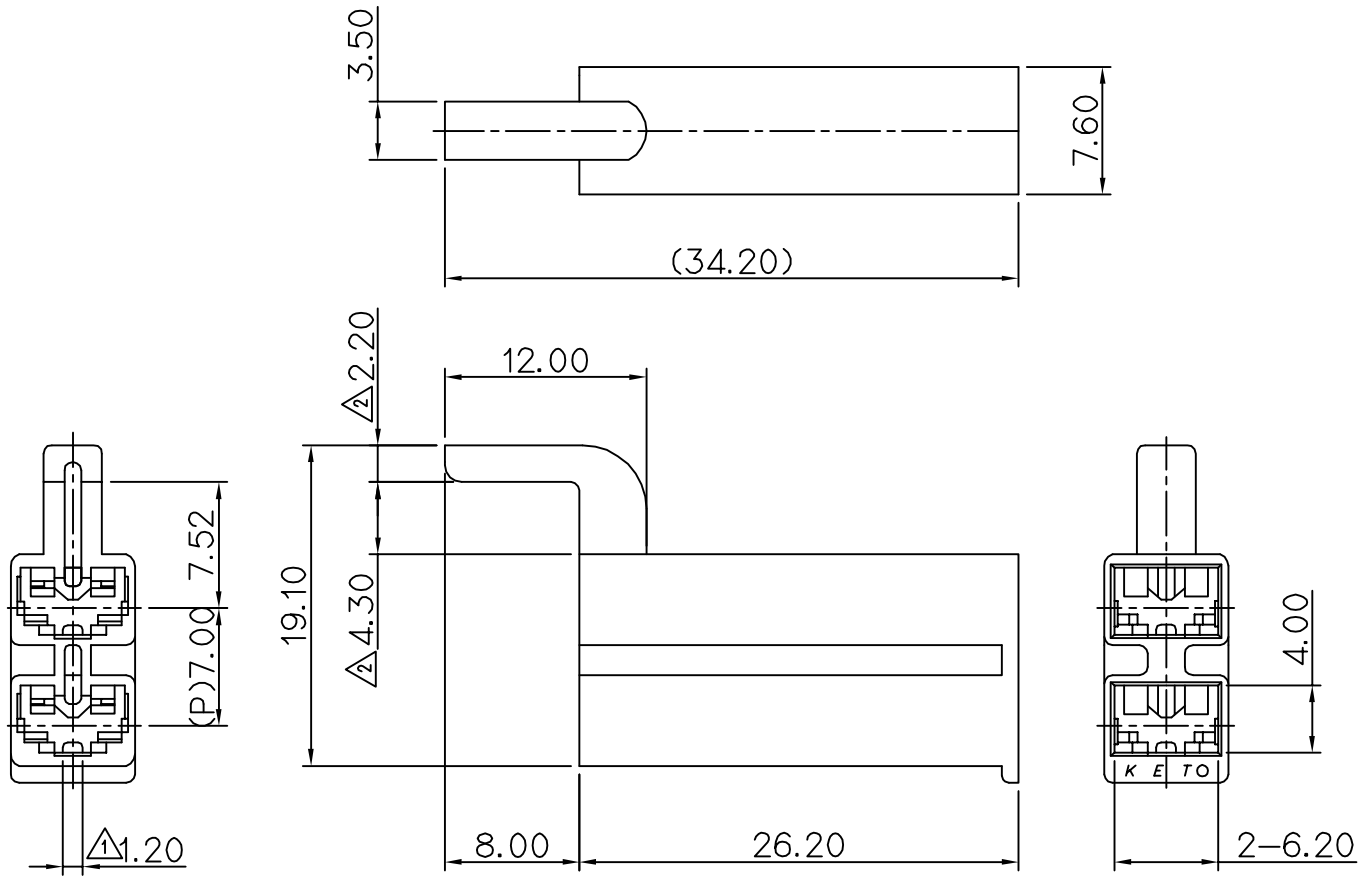

주 기

1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 적용 TERMINAL: ST730567-3/568-3/569-3
3. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE TERMINAL : ST730567-3/568-3/569-3
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PBT(V0)	NATURAL
1		RED
2		BLUE
3		YELLOW
5		BLACK

ISSUE MARK

					MATERIAL PBT(V0)		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH NATURAL			
③	설계사양변경 S110128 근거 도면 재작성	PJM			'11.04.28	WIRE RANGE		CLASS
②	고객 요청 치수 추가 2곳	PJM			'11.04.28	INSULATION		TYPE 187 P-LOCK
①	TAB 삽입관련 형상 추가	JIG			'96.12.23	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 2/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NO.		MG631130
DR. KO '96.03.02		CHK. 3/2				PART NAME		
CHK. 3/2		APP. 3/4				187 P-LOCK 2P HSG (P:7 STOPPER)		