


Technical drawing of a mechanical part, likely a shaft or rod, showing a cross-section. The drawing includes a central horizontal axis with a dashed line indicating the center. The part has a cylindrical section on the left and a rectangular section on the right. The dimension 3.50 is indicated for the cylindrical section, and the dimension 7.60 is indicated for the rectangular section.

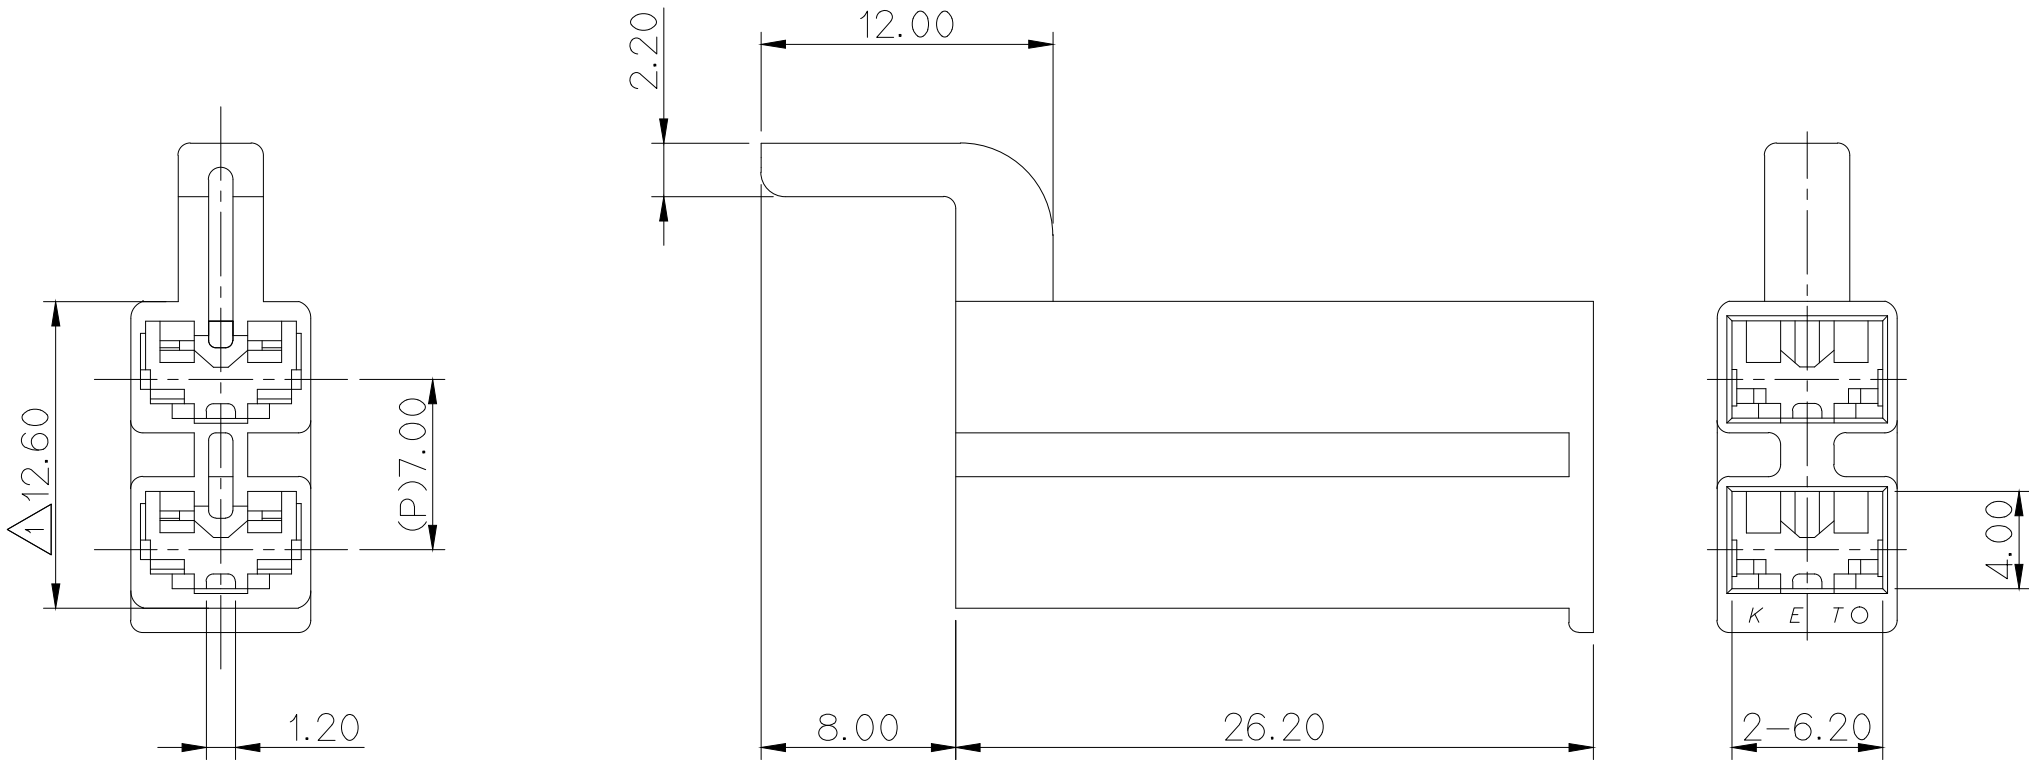


1. 기능상 유해한 BURR, WELDLINE 없을 것
2. 지시하지 않은 모든 R은 0.3R.
3. 적용 TERMINAL: ST730567-3/568-3/569-3
4. 제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.3 RADIUS.
3. APPLICABLE TERMINAL : ST730567-3/568-3/569-3
4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

	NO.	COLOR
*	0	NATURAL
*	1	RED
*	2	BLUE
	3	YELLOW
	4	GRAY
	5	BLACK
	6	GREEN

**KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Produc
t Development Team**

ISSUE MARK

					MATERIAL		PET+PC(GWIT)	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	
					INSULATION		TYPE	
①	ECO-1802-067 의거 도면 재작성	LYS	KSH	BUC	18.02.05			187 P-LOCK
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
						SEE TABLE	2/1	MG631130T-*02
DR. LYS '17.11.01		CHK. PSH '17.11.01				PART NAME		
CHK. KSH '17.11.01		APP. BUC '17.11.01						
187 P-LOCK 2P HSG (P:7 STOPPER)								