


GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

NOTE

1. MUST BE FREE OF BURR, WELDLINE
AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE HOUSING : MG621164,611163,621173
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead,
Mercury, Cadmium, Hexavalent Chromium, PBBs,
PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE
CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE
& RoHS REGULATION

주 기

1. 기능상 유해한 BURR및 WELDLINE등이 없을것.
2. 적용 하우징 : 621164,611163,621173
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬
PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한
최대 허용농도를 초과해서는 안 된다.

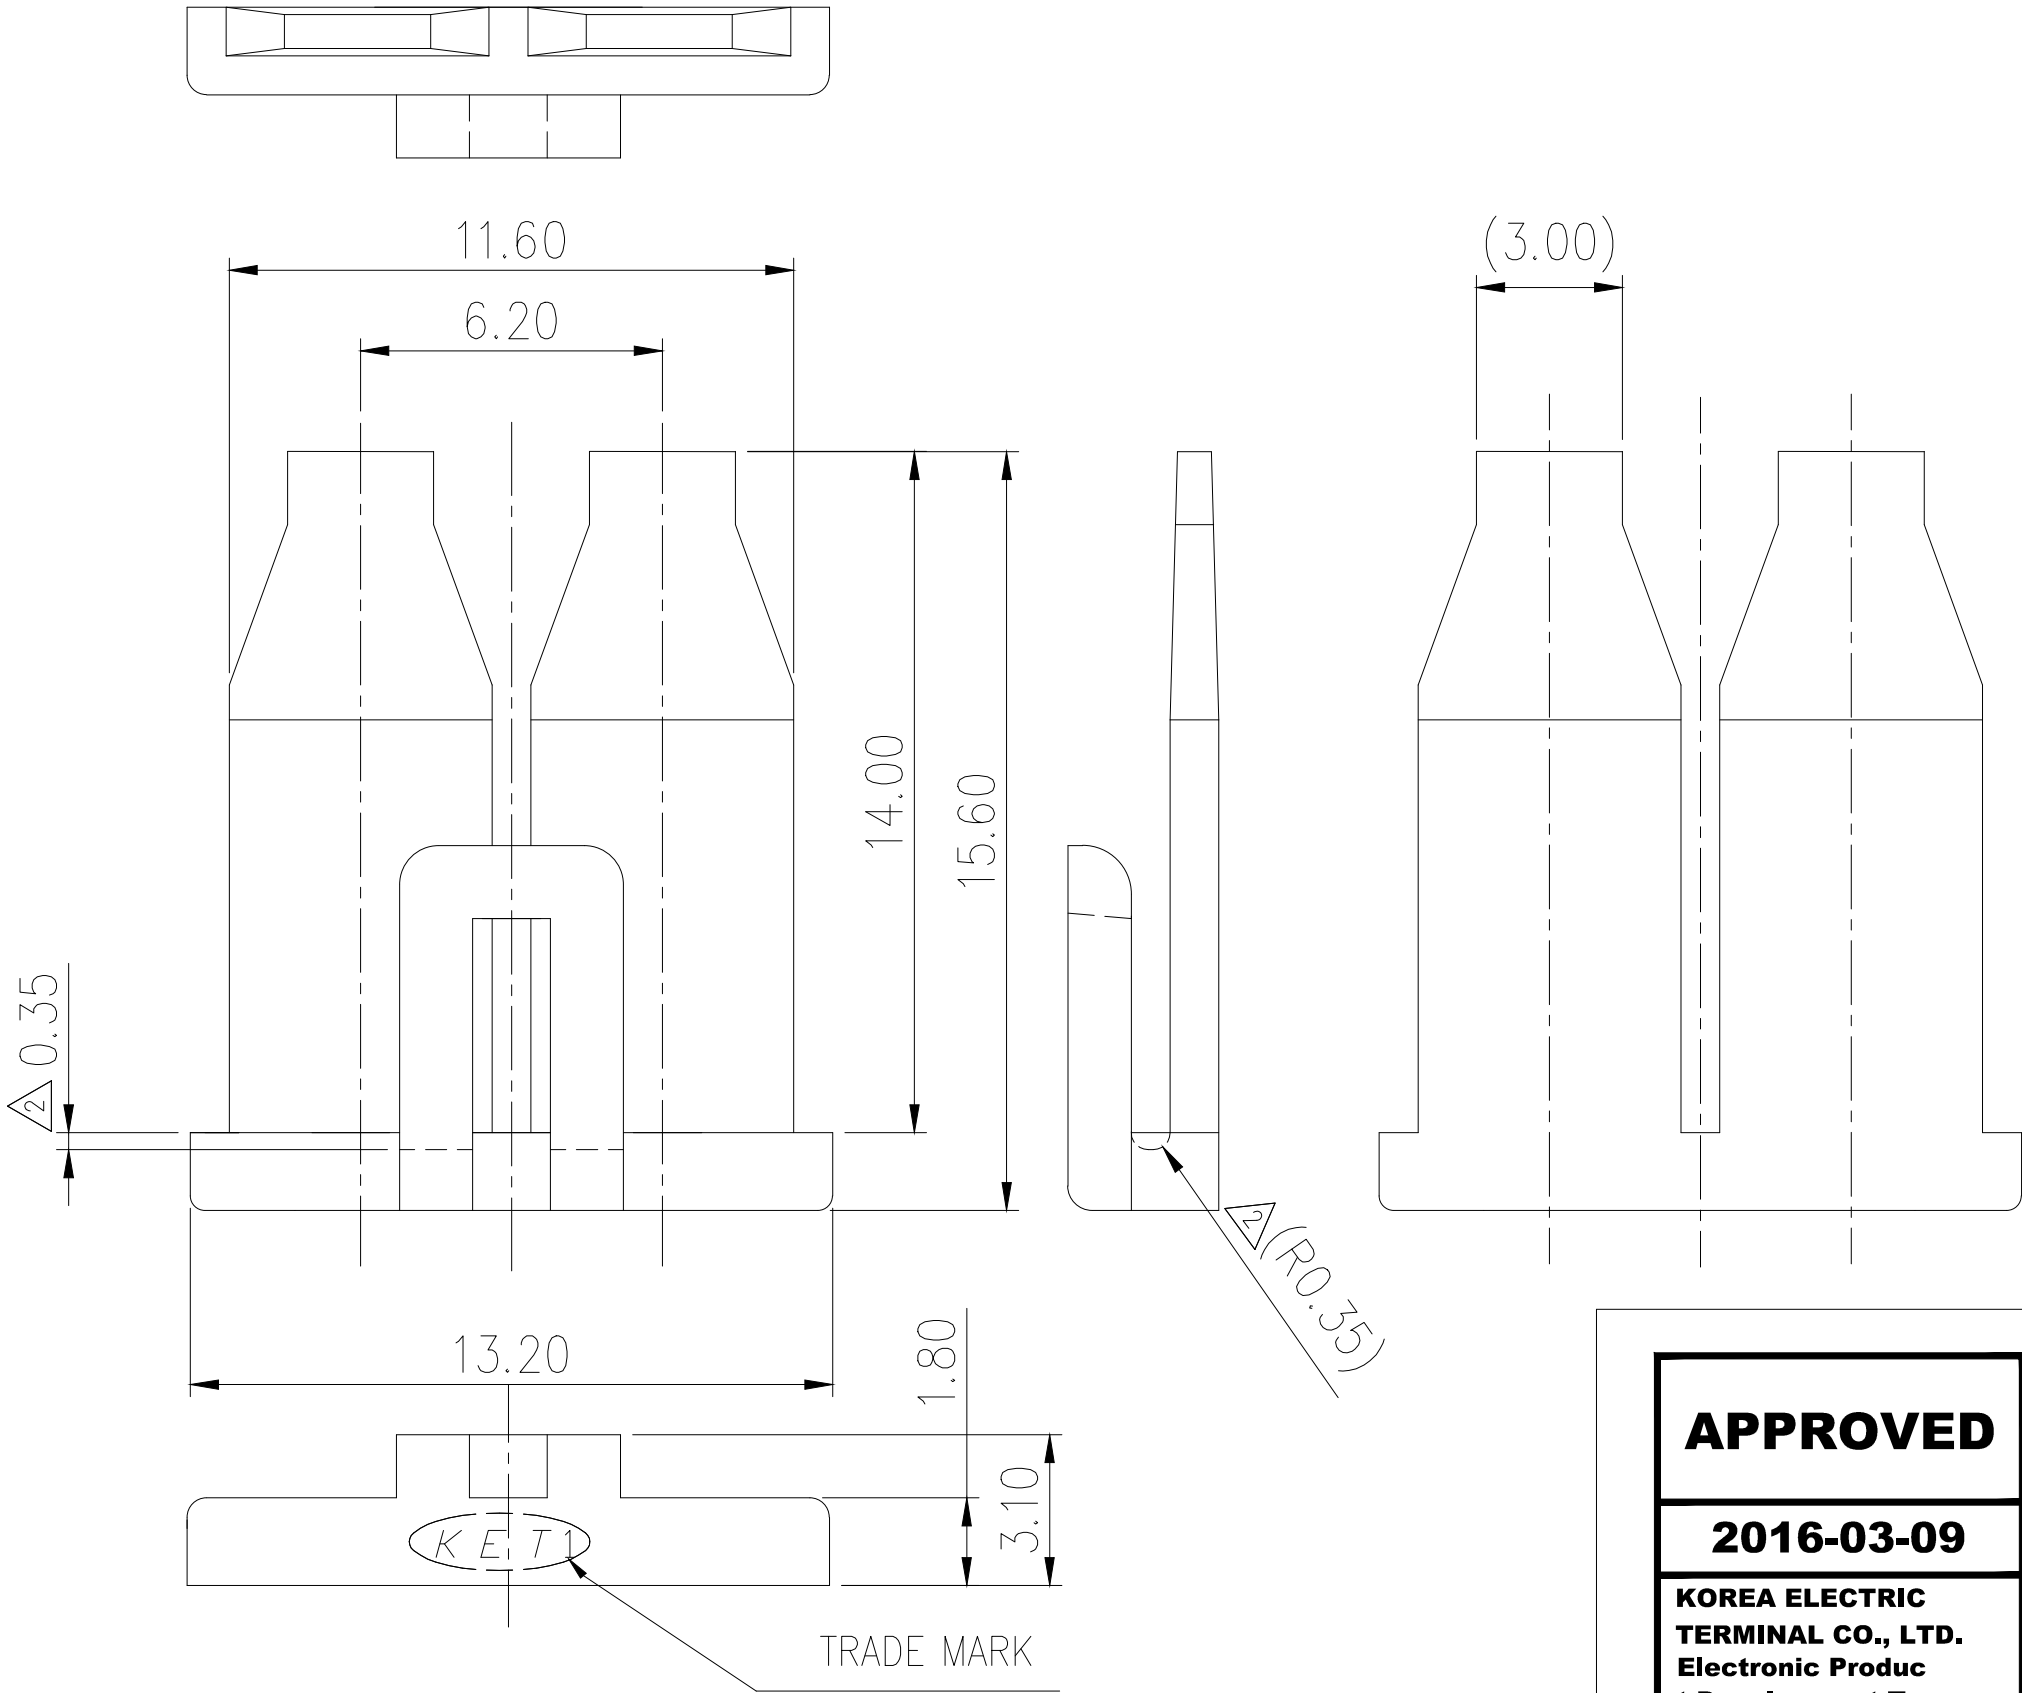


APPROVED

2016-03-09

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product Development Team

ISSUE MARK

					MATERIAL	△3PBT (V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
4	설계사양변경서'S110128'근거 도면재작성	KSH		'11.04.29	FINISH	BLUE	
3	설계사양변경(S100088)근거 수정			'10.04.15	WIRE RANGE		
2	설계사양변경(S090134)근거 수정	PSH		'09.05.29	INSULATION		CLASS
1	원재료 변경	HEE		'98.01.14			TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	K0.96.07.16	CHK.				SEE TABLE	MG631165
CHK.	J. w k	APP.				PART NAME	1806 D/L 2P REAR HOLDER