PART NO. MG631171

CUSTOMER DRAWING

(DIMENSIONS IN MM)

GENERAL TOLERANCE (TERMINAL)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

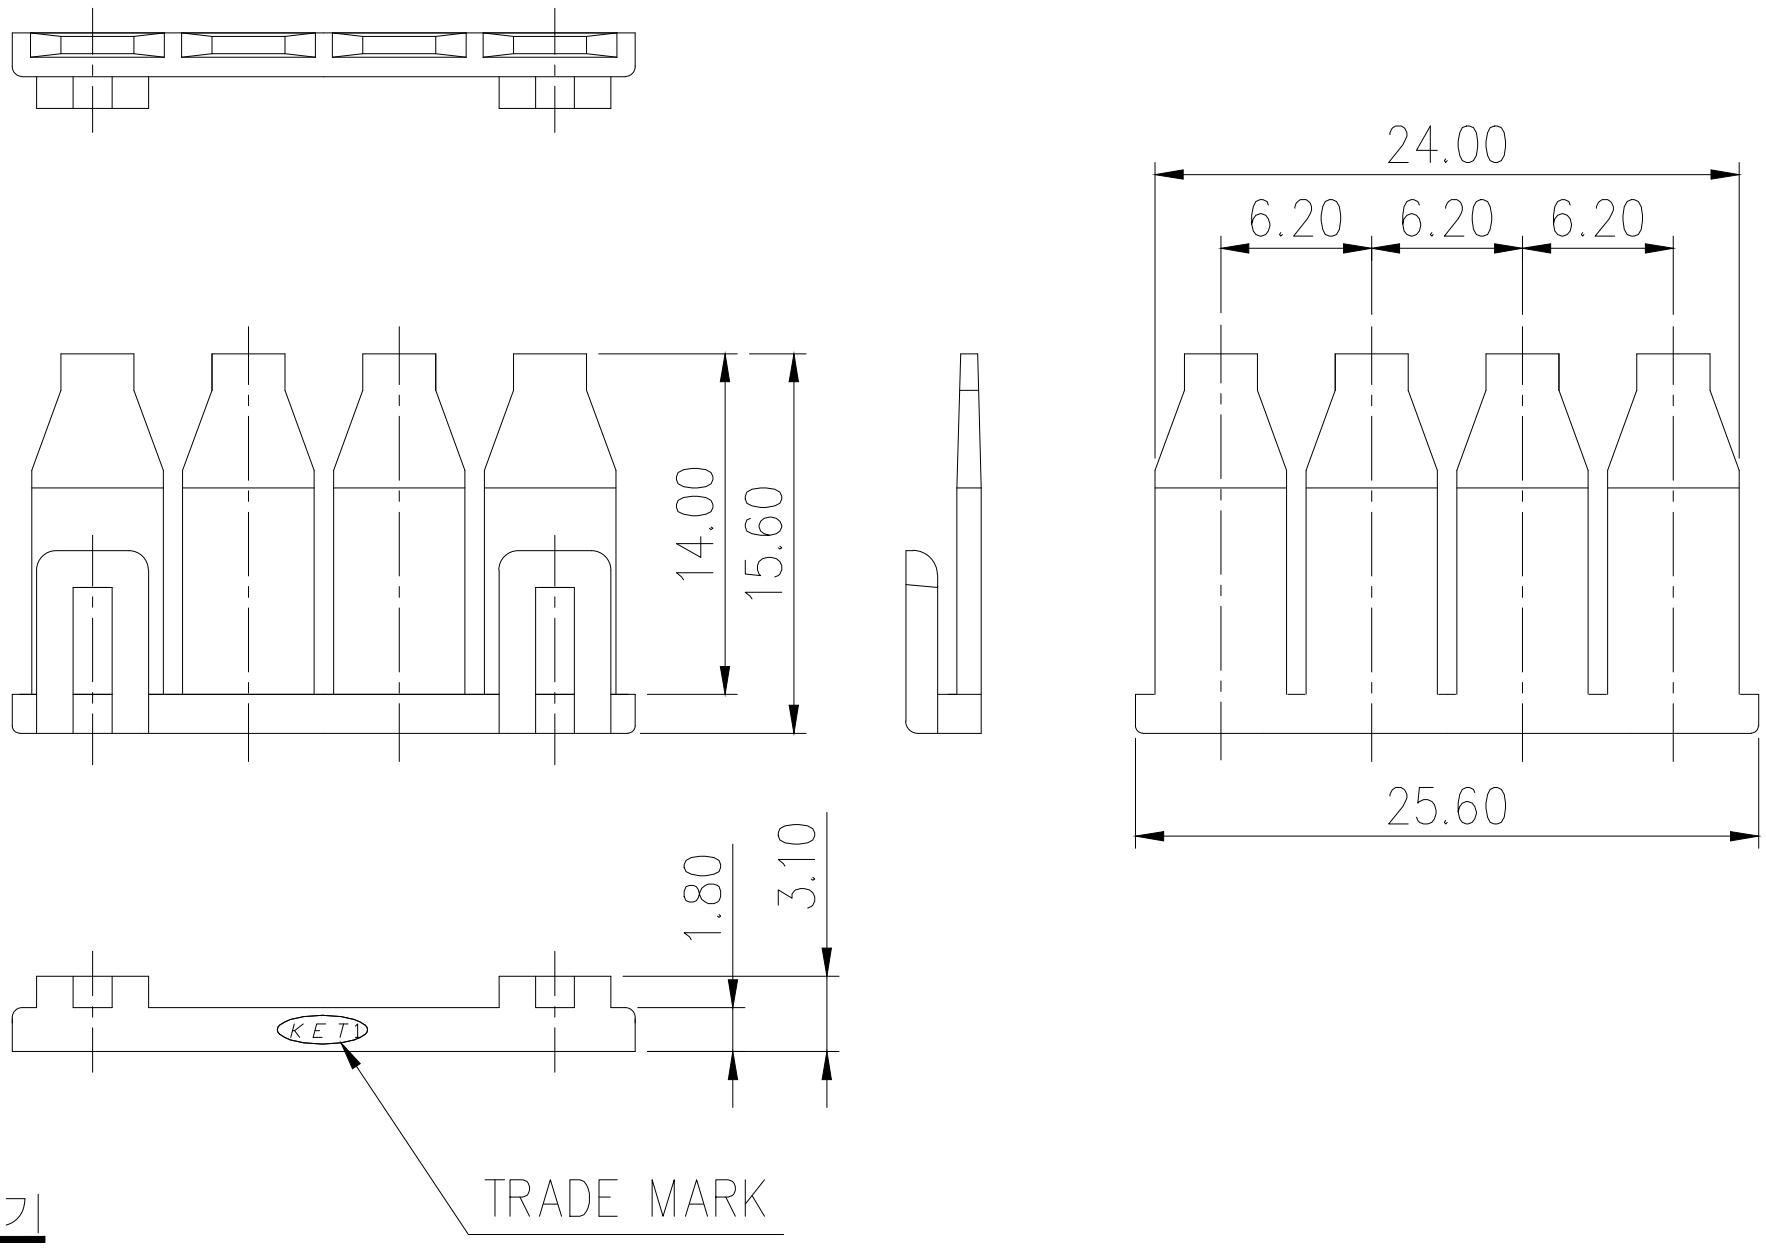

주 기

1. 기능상 유해한 BURR및 WELDLINE등이 없을것.
2. 적용 하우징 : MG611169,621170,621175
3. 제품 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬 PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용농도를 초과해서는 안 된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPICABLE HOUSING : MG611169,621170,621175
3. 6HAZARDOUS SUBSTANCES IN PARTS (Lead, Mercury, Cadmium, Hexavalent Chromium, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION

APPROVED

2016-03-11

KOREA ELECTRIC TERMINAL CO., LTD. Electronic Produc t Development Team

ISSUE MARK

LTR	REVISION RECORD	DR. / CHK.	APP.	DATE
2	설계사양변경서'S110128'근거 도면재작성	KSH	—	11.04.29
1	원재료 변경	HEE		'98.01.14

DR. KO.96.07.16 CHK. 7/22 7/22

CHK. 7/22 APP. 7/22

MATERIAL 1 PBT (V0)

FINISH BLUE

WIRE RANGE

INSULATION

TOLERANCE EXCEPT AS NOTED SEE TABLE

SCALE 2/1

KET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.

CLASS

TYPE

PART NO. MG631171

PART NAME 1806 D/L 4P REAR HOLDER