


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

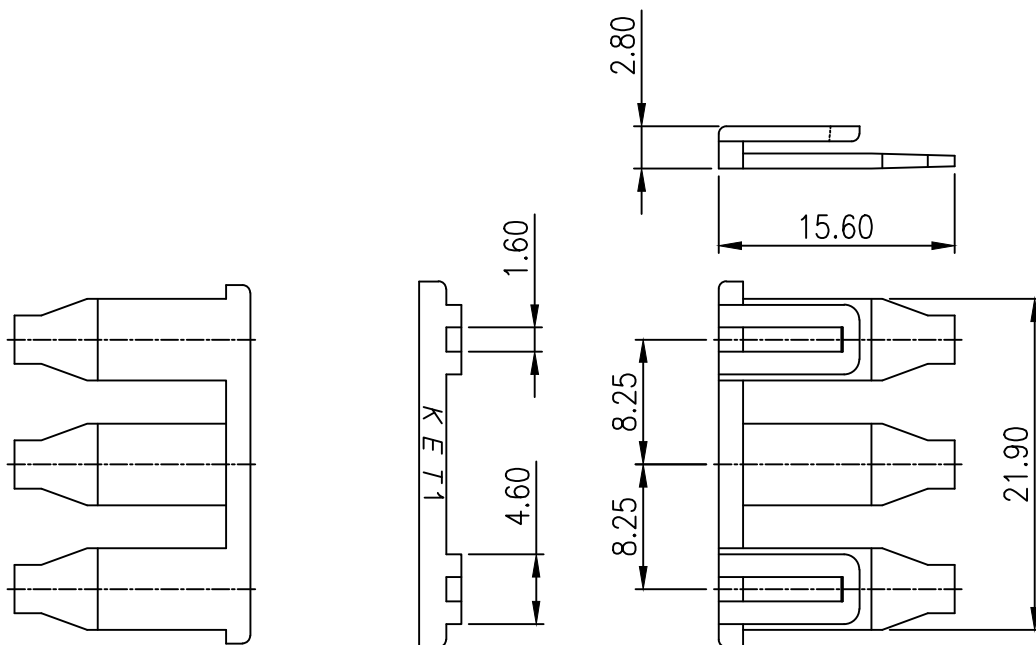

주 기

1. 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
2. 적용 HOUSING: MG621224, 622537T, 622537D
MG622538-4, 622538-4
3. 내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING : MG621224, 622537T, 622537D
MG622538-4, 622538-4
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

ISSUE MARK

					MATERIAL	PBT(V-0)	KIET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.
					FINISH	SEE TABLE	
					WIRE RANGE		
					INSULATION		CLASS 0709
1	설계사양변경S110128근거 도면 재작성	PJM	KSH	5/24	'11.04.28		TYPE MULTI
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO. MG631230
	DR. KO . '99. 7.29	CHK.			11/26	SCALE 2/1	
	CHK.	APP.			11/27	PART NAME	MULTI 3P REAR HOLDER