
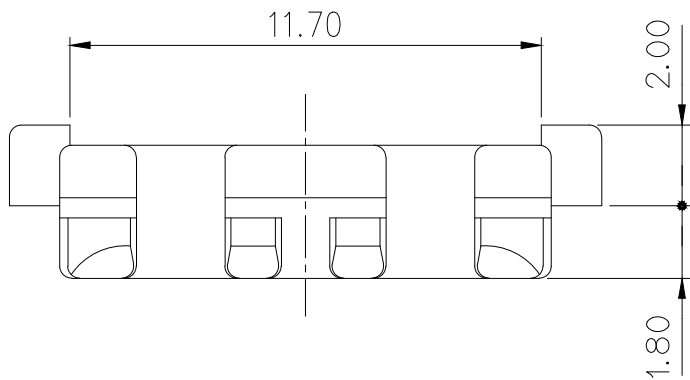
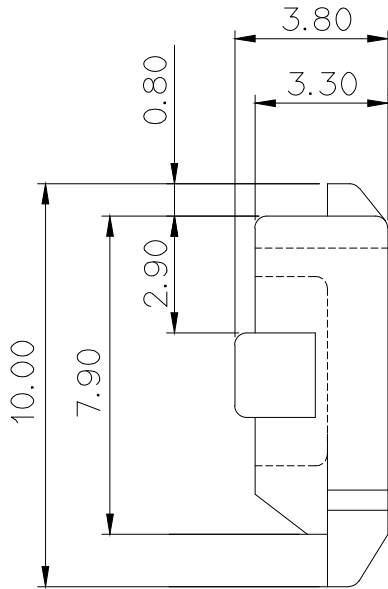


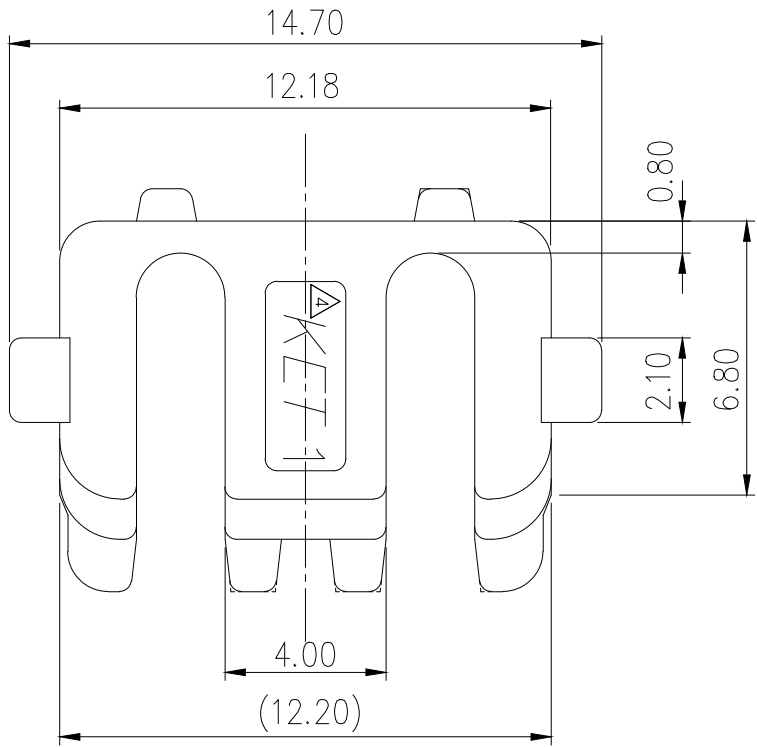

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	PBT	NATURAL
1		RED
2		BLUE
3		YELLOW
* 40		DARK GRAY
41		LIGHT GRAY
* 5		BLACK
6		DARK GREEN
* 7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 지시하지 않는 R은 전부 0.3으로 할것.
- 제품기능상 유해한 BURR, 변형 및 WELDLINE등이 없을 것.
- 적용 HOUSING : MG611236, MG641238

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

						MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH	SEE TABLE		
						WIRE RANGE	CLASS		
						INSULATION	TYPE		
	ECO—1503—463근거도면 재작성	KCS	HYJ	LSY	15.03.23	TOLERANCE EXCEPT AS NOTED	SCALE 5/1	PART NO. MG631237	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE		SEE TABLE		
DR. JANG 97.12.03		CHK. 					PART NAME SSD — 4P REAR HOLDER		
CHK.		APP. 