

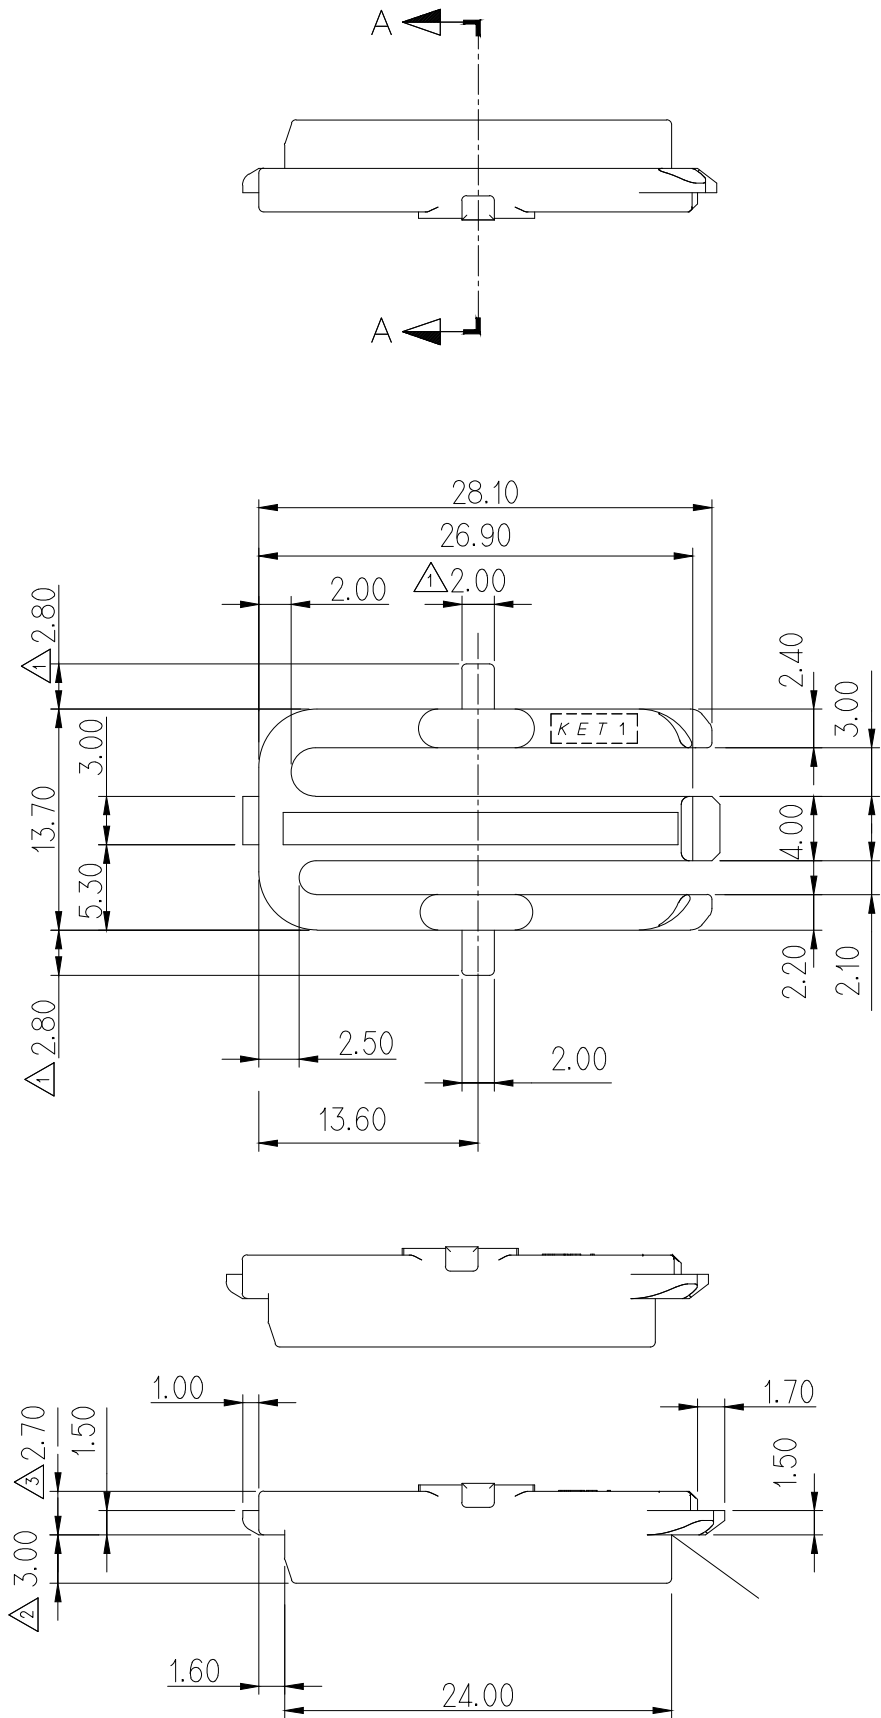



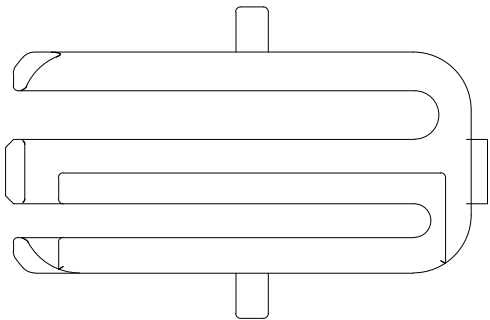

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



NOTE

1. 지시하지 않는 R은 전부 0.3로 할것.
2. 제품기능상 유해한 BURR,변형 및 WELDLINE등이 없을것.
3. 적용 HOUSING: MG641288, MG641299
4. MATERIAL : PBT , BROWN COLOR

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE NOTE		 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH SEE NOTE		
③	ECO-1506-409급 커 도면 재작성 (리테이너 들름 개선)	KCS CKY	LSY	'15.06.24	WIRE RANGE		CLASS
②	시방(020175) 근거 수정 -R/H 작업성 보완	KYM		'02.12.10	INSULATION		TYPE
①	시방NO.010019에 의한 도면 재작성.	LSY		'01.02.06	TOLERANCE EXCEPT AS NOTED SEE TABLE		PART NO. MG631289
LTR	REVISION RECORD	DR.	CHK.	APP.			
DR.	MAN 98.07.15.	CHK.			7/16	PART NAME SSD 10P REC R/H	
CHK.		APP.			7/16		