


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

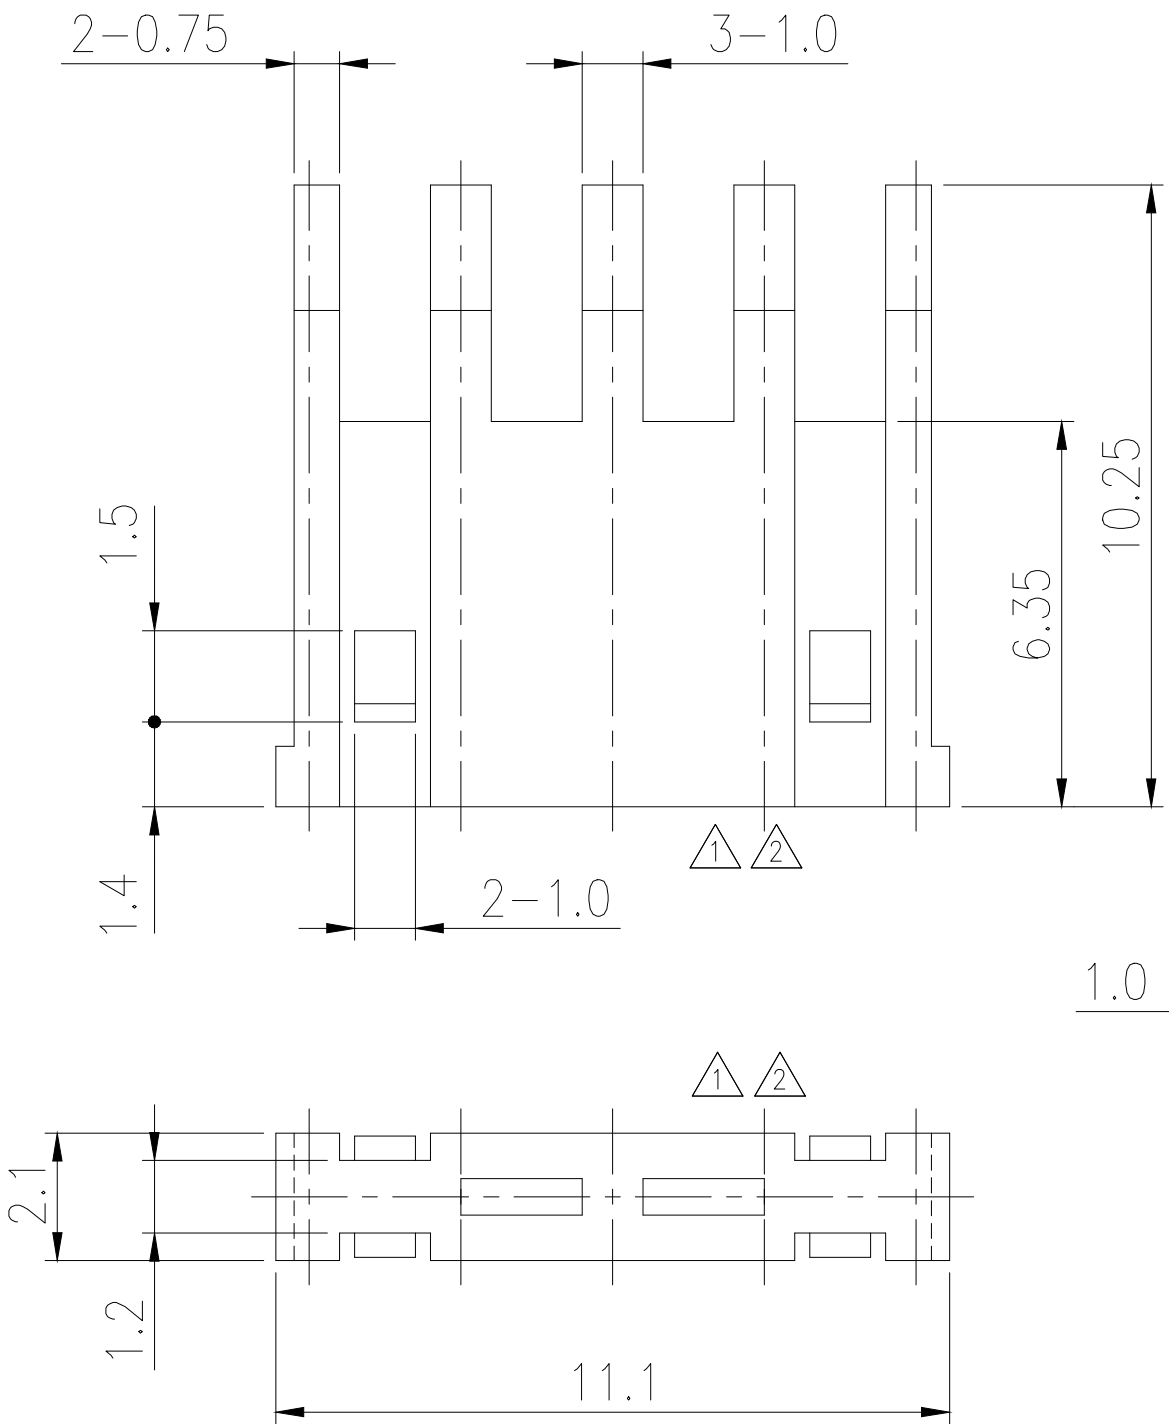

NO.	METERIAL	COLOR
0	P B T:	NATURAL
1		RED
2		BLUE
3		YELLOW
4		GRAY
5		BLACK
6		W/GREEN
7		BROWN
8		GREEN

주 기

1.적용 HOUSING: MG671381

△ 2.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서
지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. APPLICABLE HOUSING :MG671381


△ 2. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD,MERCURY, CADMIUM,HEXAVALENT CHROMIUM,PBBs,PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

					MATERIAL	SEE NOTE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	BLACK	
					WIRE RANGE		
△2	설계사양변경 (S080201)근거 도면 재작성 (REWORK JIG 결립력 4곳 삭제)	KMH		08.08.12	INSULATION		CLASS
△1	설계사양변경 (S080158)근거 도면 재작성	KMH		08.07.07			TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	WON. 96.12.11	CHK.				±0.20	MG631383
CHK.						SCALE 5 / 1	
						PART NAME	
						0509 18P PLUG FRONT HOLDER	