
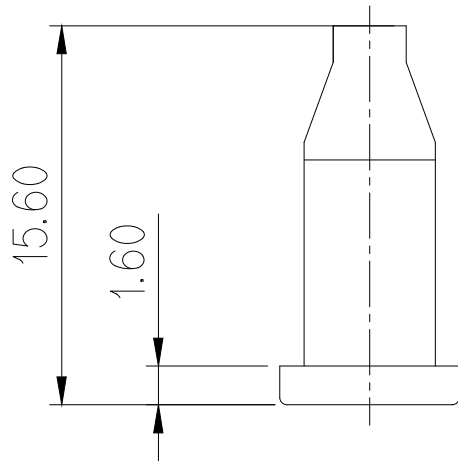
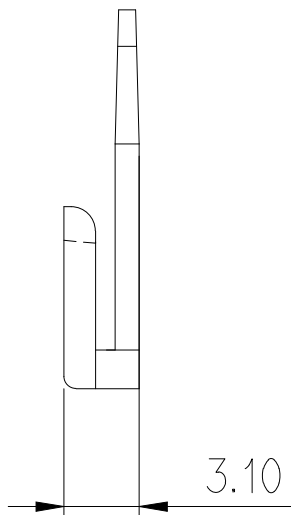

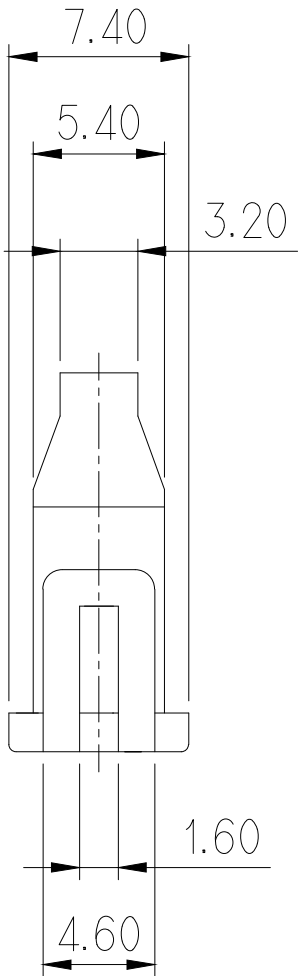


GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	



주 기

- 기능상 유해한 FLASH, SINK, WELDLINE 등이 없을것.
- 적용 HOUSING : MG611532, MG621533, MG621534
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


- MUST BE FREE OF FLASH, SINK, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG611532, MG621533, MG621534
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Electronic Product
Development Team

ISSUE MARK

					MATERIAL	PBT (V0)	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	BLUE	
					WIRE RANGE		
					INSULATION		CLASS
	설계사양변경(S110128)근거 도면 재작성				'11.04.28		TYPE
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	PART NO.
DR.	KO	'98.08.12	CHK.		'98.08.13	SEE TABLE	MG631535
CHK.		'98.08.13	APP.			PART NAME	
						1806 D/L 1P REAR HOLDER	