

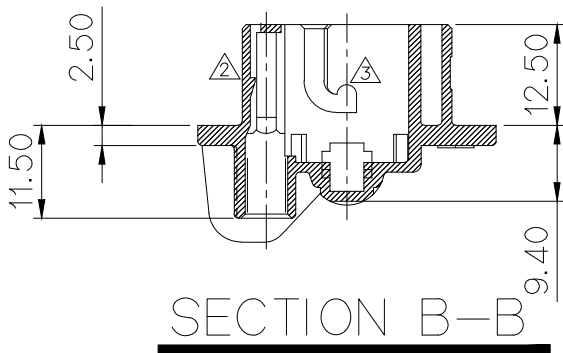
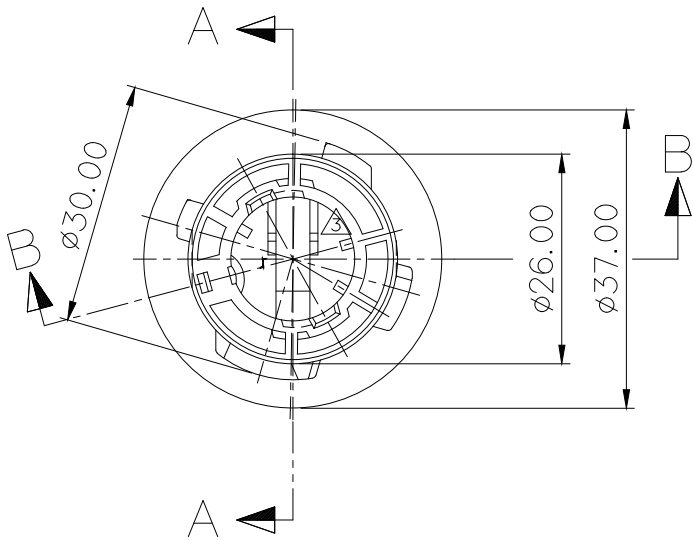
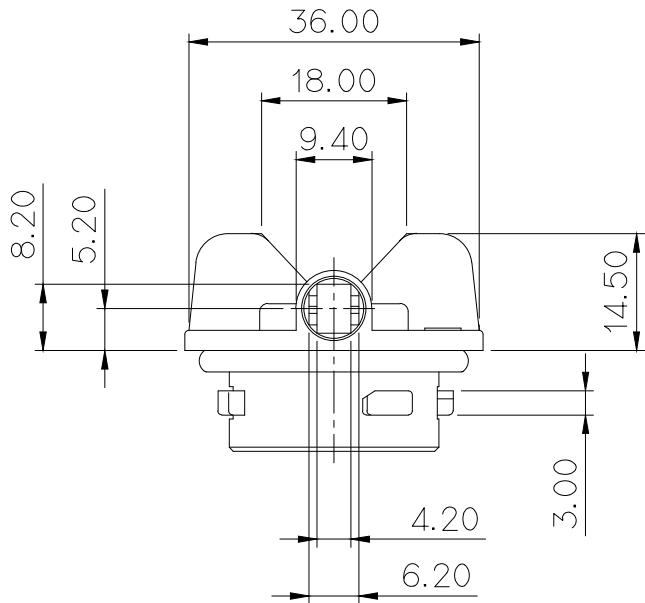



GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.20	±0.25	±0.30	±30'	0.10	

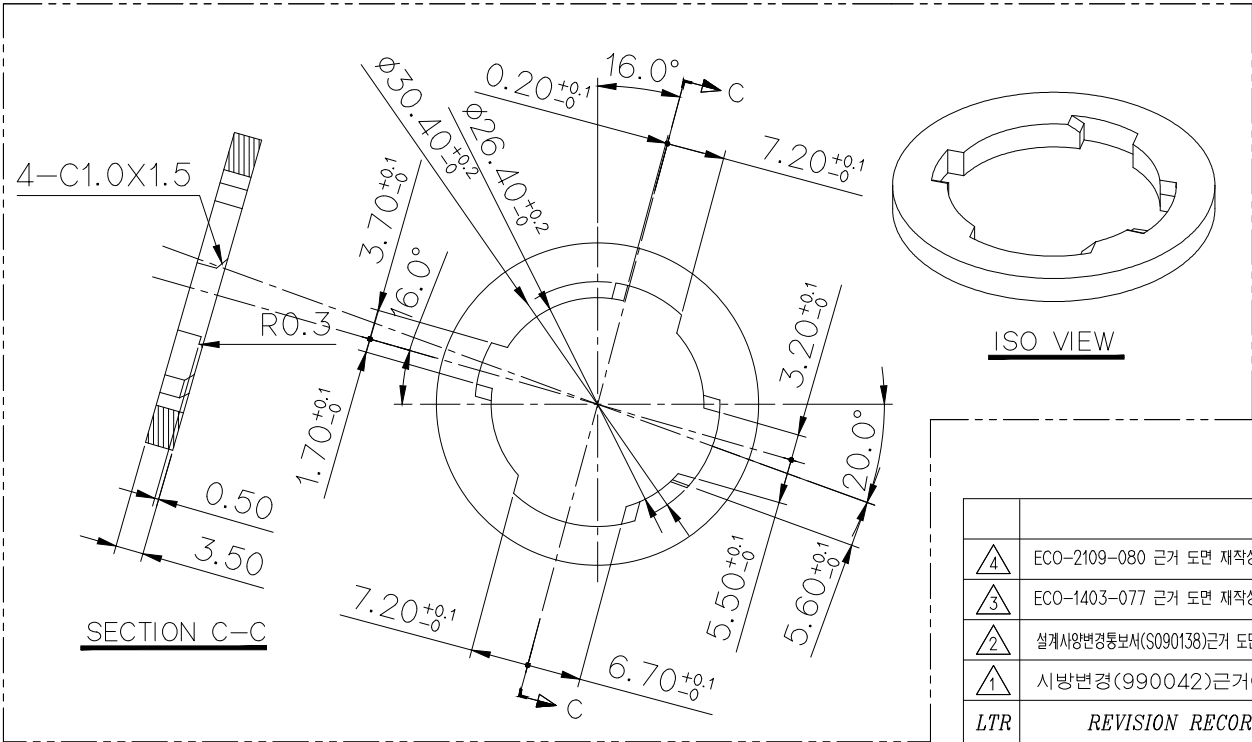

- 주 기
1. 지시하지 않은 R은 0.5로 할 것.
 2. 기능상 유해한 BURR 및 변형이 없을 것.
 3. 지시하지 않은 치수의 공차는 도면 상단 TABLE에 준함.
 4. 적용 TERMINAL : ST760794(POSITIVE),
ST760795(EARTH)
 5. 적용 WIRE SEAL : MG682027(POSITIVE),
MG682028(EARTH)
 6. 적용 SEAL GASKET : MG681919
 7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

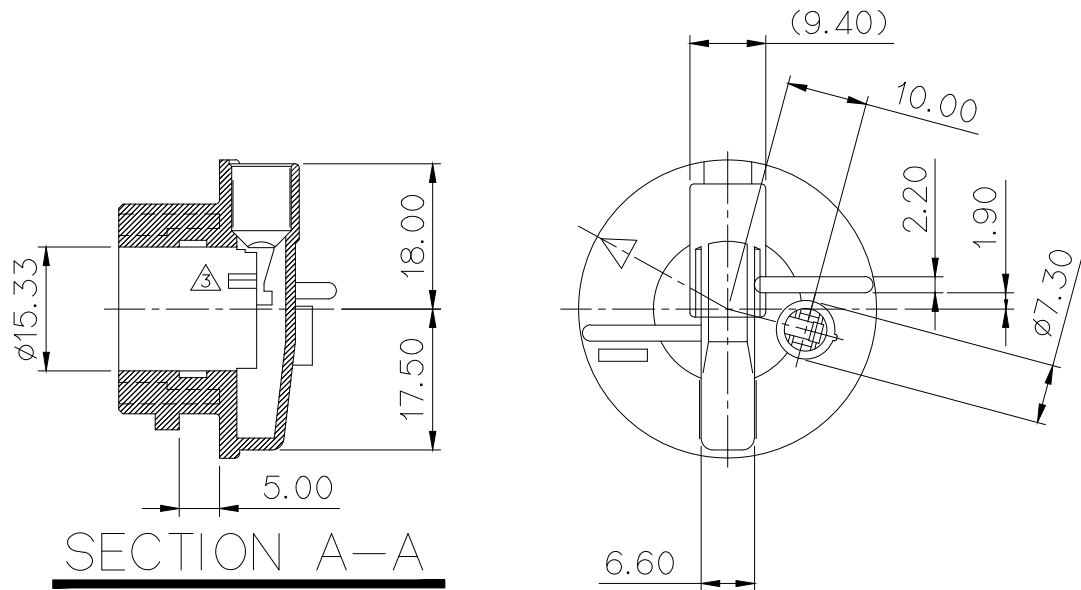

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
 2. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 3. THE TOLERANCE OF THE DIMENSION NOT INDICATED CORRESPONDS TO THE TABLE AT THE TOP OF THE DRAWING.
 4. APPLICABLE TERMINAL : ST760794(POSITIVE),
ST760795(EARTH)
 5. APPLICABLE WIRE SEAL : MG682027(POSITIVE),
MG682028(EARTH)
 6. APPLICABLE SEAL GASKET : MG681919
 7. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

NO.	MATERIAL	COLOR
0	PA66+MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

APPROVED

2021-10-25

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
④	ECO-2109-080 근거 도면 재작성	SDI	KSC	HYJ	21.09.14	FINISH SEE TABLE			
③	ECO-1403-077 근거 도면 재작성	NKT	SSH	HJB	14.04.28	WIRE RANGE		CLASS	INHEE
②	실계시양변경통보서(S090138)근거 도면 재작성	BJG	44	Yuj	09.06.03	INSULATION		TYPE	820-06-151
①	시방변경(990042)근거에 의거	MOOK	44	Yuj	99.05.24	TOLERANCE EXCEPT AS NOTED SEE TABLE		SCALE 1/1	PART NO. MG631781-4
LTR	REVISION RECORD	DR.	CHK.	APP	DATE	PART NAME			
DR. MOOK,'98.10.19		CHK. Yuj		10/30		RCL B/HOLDER WP SINGLE HS'G			
CHK. 7-9 10/30		APP. CHOSM.		10/31					