
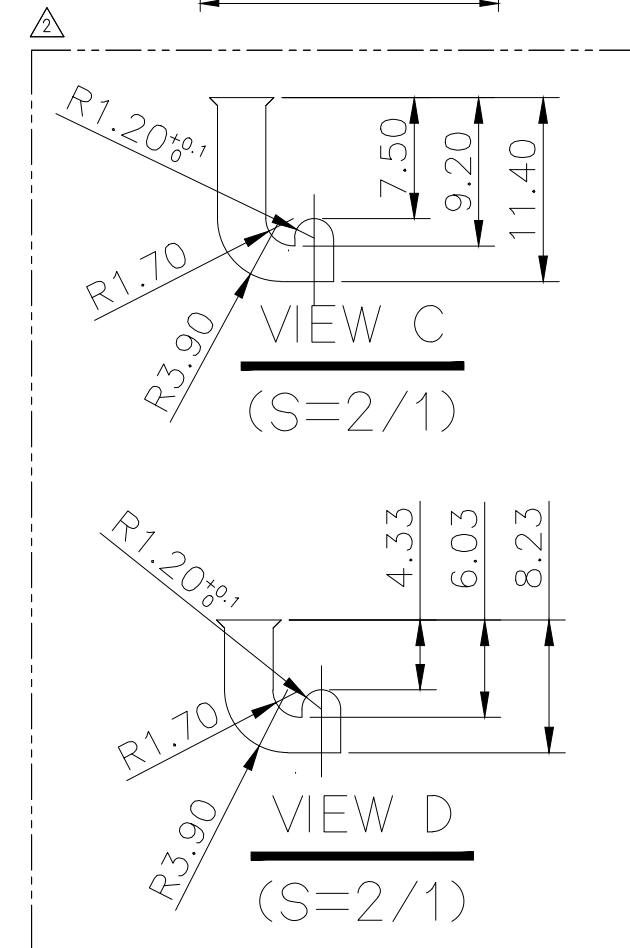
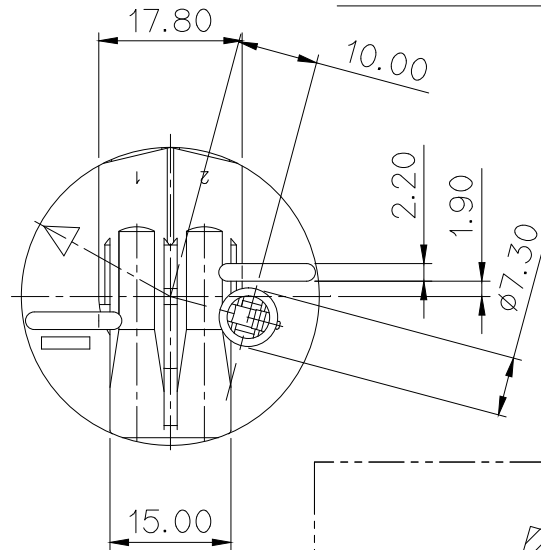
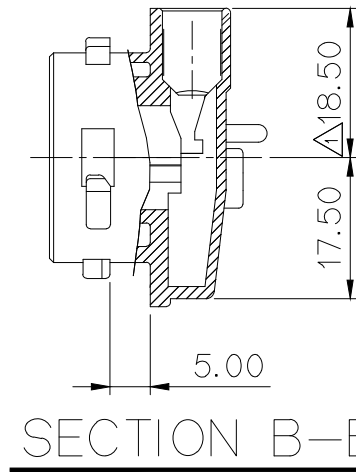
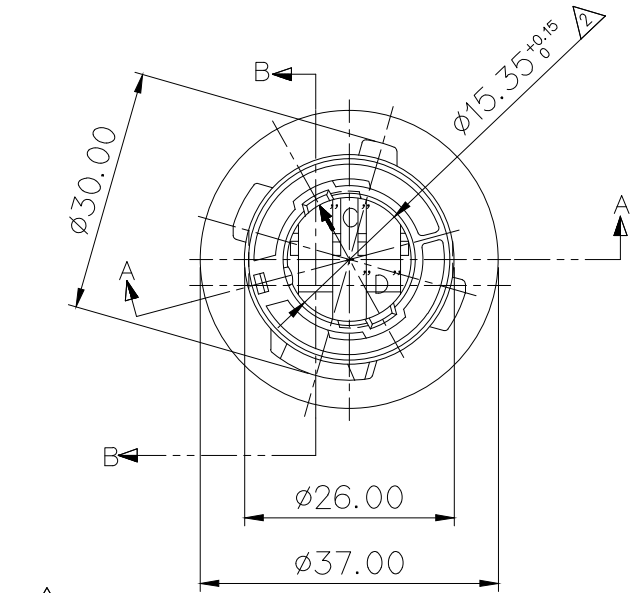
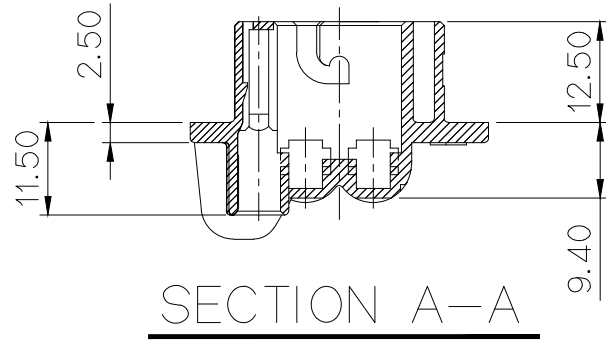


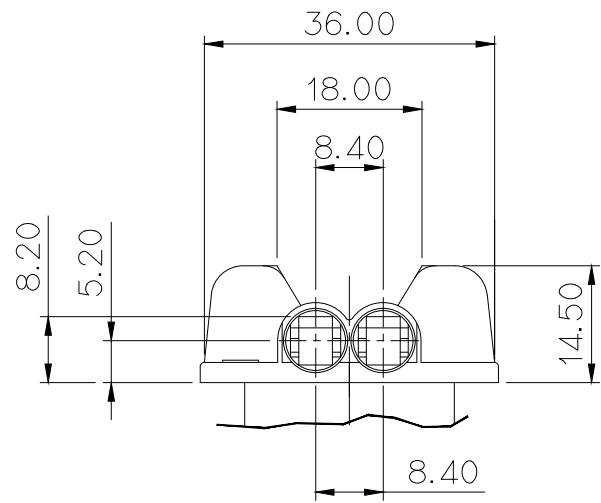

NO.	MATERIAL	COLOR
0	PA66+MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	


NOTE

- UNLESS OTHERWISE SPECIFIED ALL RADIUS TO BE 0.5 RADIUS.
- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- THE TOLERANCE OF THE DIMENSION NOT INDICATED CORRESPONDS TO THE TABLE AT THE TOP OF THE DRAWING.
- APPLICABLE TERMINAL : ST760794(POSITIVE), ST760795(EARTH)
- APPLICABLE WIRE SEAL : MG682027(POSITIVE), MG682028(EARTH)
- APPLICABLE SEAL GASKET : MG681919
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBBs, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE & RoHS REGULATION.

주 기

- 지시하지 않은 R은 0.5로 할 것.
- 기능상 유해한 BURR 및 변형이 없을 것.
- 지시하지 않은 치수의 공차는 도면 상단 TABLE에 준함.
- 적용 TERMINAL : ST760794(POSITIVE), ST760795(EARTH)
- 적용 WIRE SEAL : MG682027(POSITIVE), MG682028(EARTH)
- 적용 SEAL GASKET : MG681919

7. 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

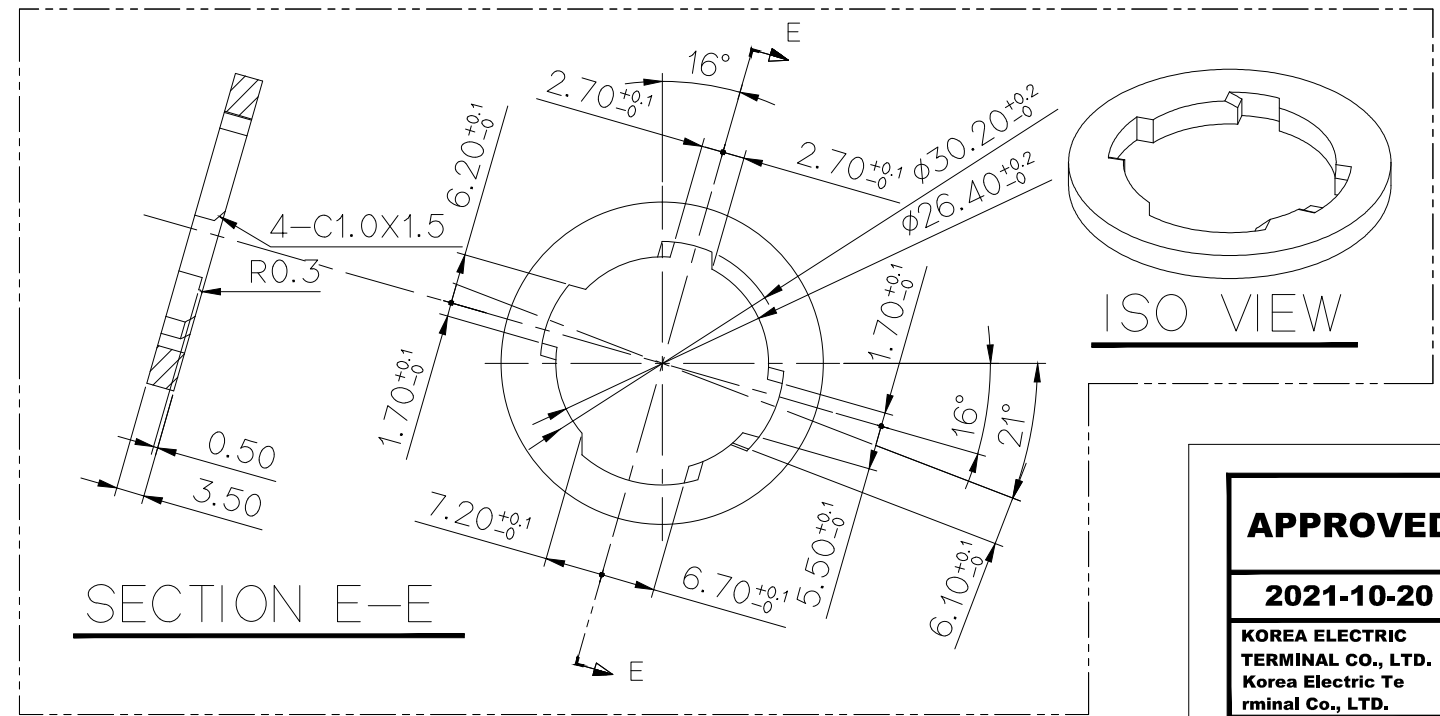

SOCKET PLUG HOLE

					MATERIAL PA66+MINERAL30%		KIET ENGINEERED KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH BROWN			
3	ECO-2109-098 근거 도면 재작성	SDI KSC	HYJ	'21.09.10	WIRE RANGE		CLASS INHEE	
2	ECO-1412-334 근거 도면 재작성	NKT SSH	BIN	'14.12.24	INSULATION		TYPE 820-06-153	
1	시방변경(990042)근거 수정	MOOK KKJ	JJH	'99.05.24	TOLERANCE EXCEPT AS NOTED		SCALE 1/1	PART NO. MG631783
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	PART NAME	
DR. HEM '98.09.09		CHK. KKJ 10/30		RCL B/HOLDER WP DOUBLE HS'G				
CHK. S.I. SMC 10/30		APP.CHO.S.H 10/31						