
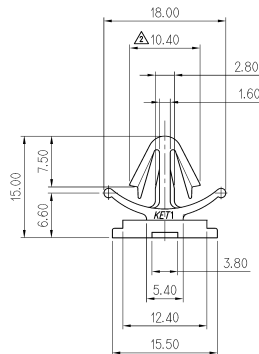




APPLICABLE PANEL
(SCALE: 2/1)



GENERAL TOLERANCE (HOUSING)

10MAX	20MAX	45MAX	ANGLE	ECCENT
±0.2	±0.25	±0.3	±30'	0.1

USED ON

주 기

1. 지시하지 않은 반경 R은 0.5로 한다
2. 기능상 유해한 BURR 및 WELDLINE 등이 없을것.
3. 적용 HOUSING : 250 D/L SERIES

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : 250 D/L SERIES



ISSUE MARK

						MATERIAL	NYLON66	KET (ENGINEER)	KOREA ELECTRIC TERMINAL CO., LTD.
						FINISH	BROWN		
	시방변경(020048)로거 도면 재 작성					WIRE RANGE		CLASS	.250 D/L
	시방변경(010087)로거 도면 재 작성					INSULATION		TYPE	
LTR	REVISION RECORD	DR	CHK	APP	DATE	THROUGHS EXPOSED ALL NOTES	SEE TABLE	SCALE 2/1	PART NO M0631935
DR	INO. 99.03.11	CHK			03.11				
CHK		03.11	APP		03.12	PART NAME	.250 D/L CLIP (Ø7 KEY HOLE TYPE)		