
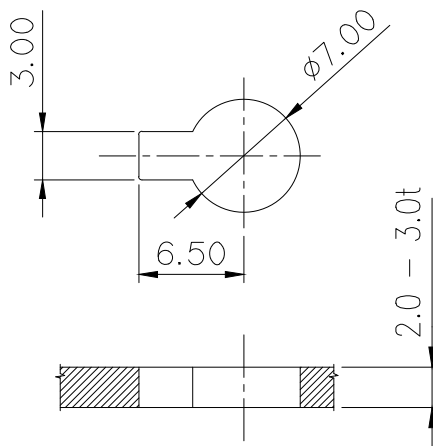
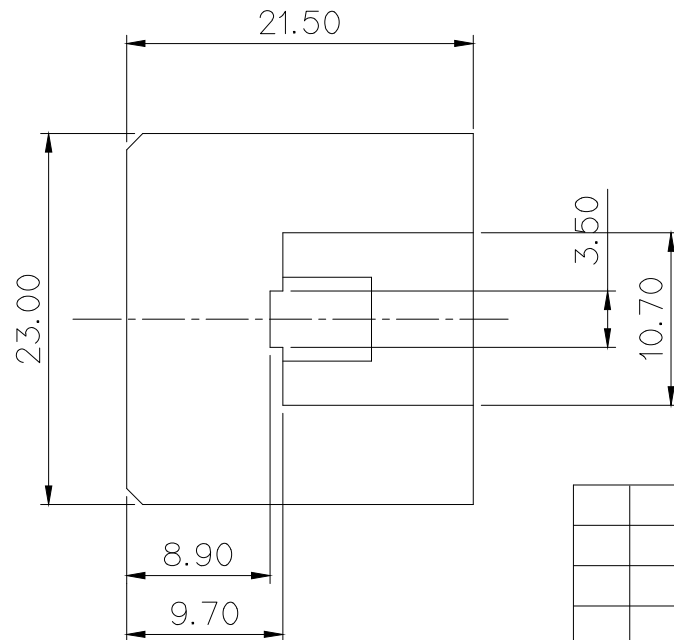
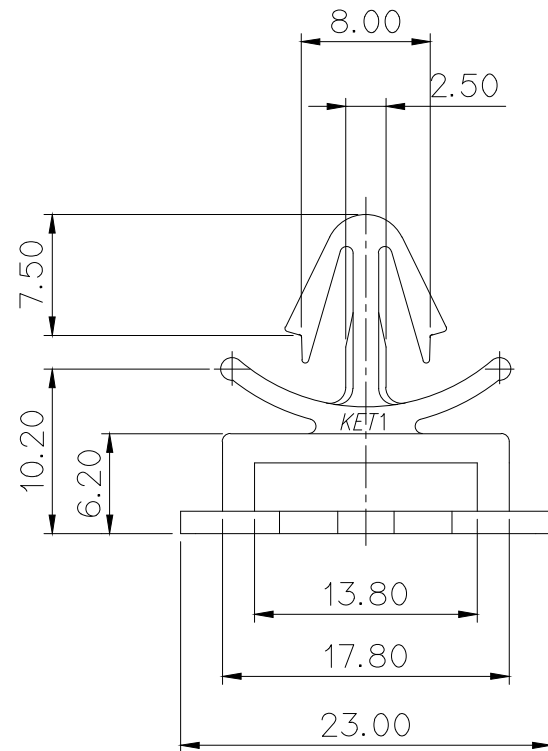
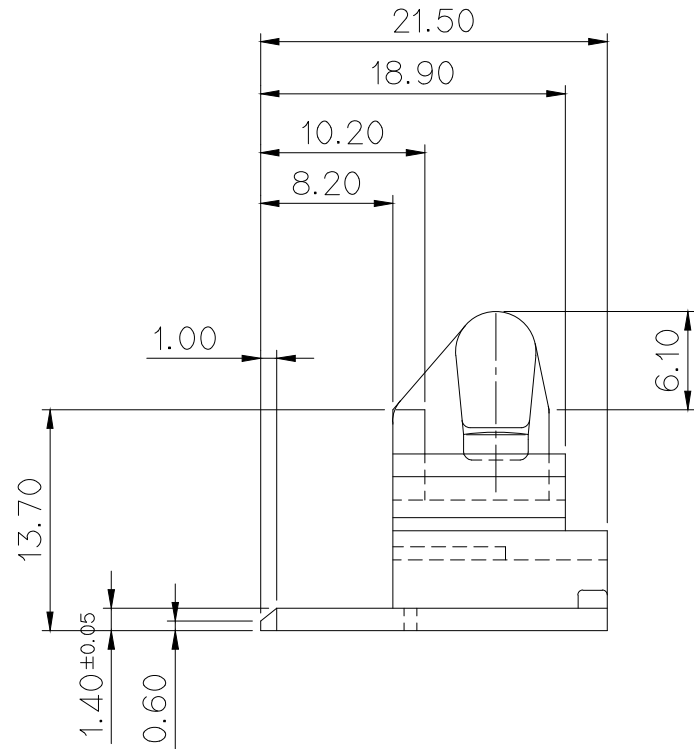
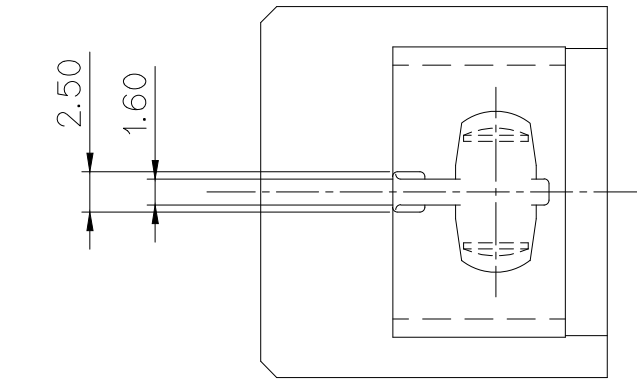


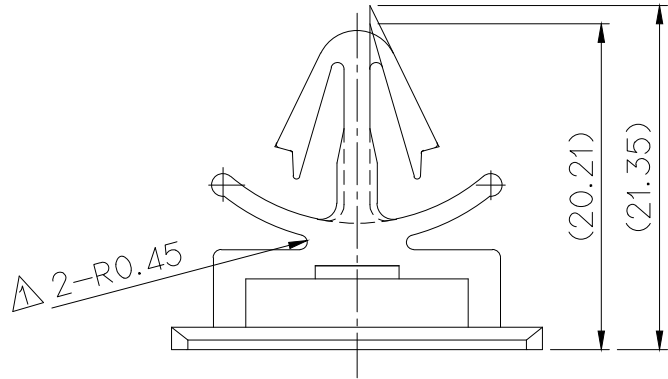

APPLICABLE PANEL
(SCALE: 2/1)

GENERAL TOLERANCE (HOUSING)

10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	USED ON
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NOTE

- MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HS'G : MG641707, MG652290
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HS'G : MG641707, MG652290
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	NYLON66	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH	NATURAL	
					WIRE RANGE		
					INSULATION		
△	시방(S040212) 근거 변경	CJH		041209	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO. MG631984
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME	
	DR. WON. 2000.10.30		CHK. KKJ		10/30		
	CHK.		APP. CHOSH		10/30	LIF CLIP (Ø7 KEY HOLE)	