
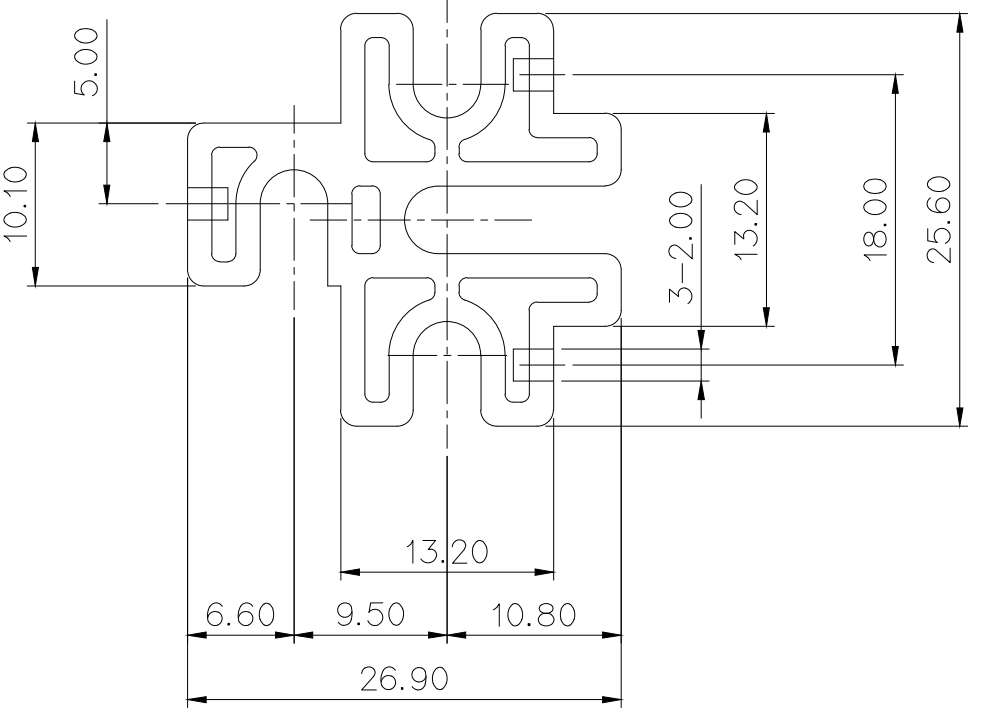
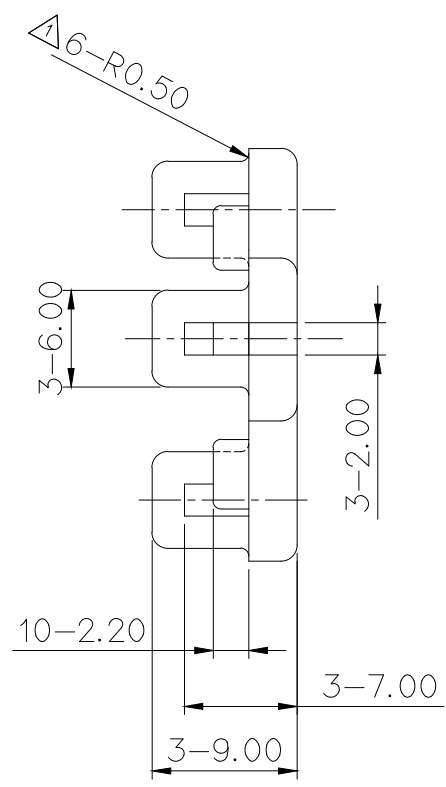


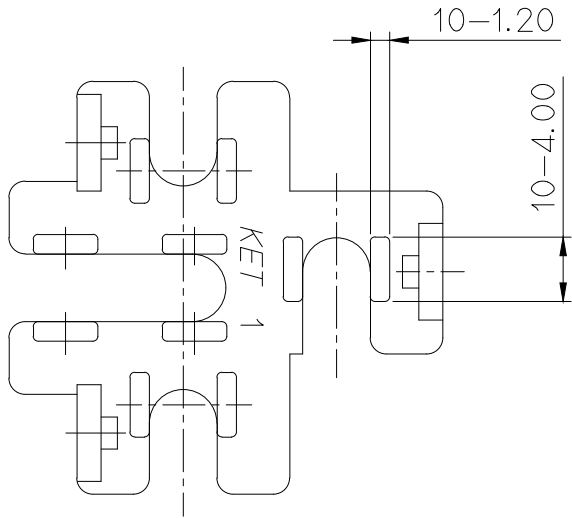

*NO.	MATERIAL	COLOR
	NYLON66:	NATURAL
		RED
		BLUE
		YELLOW
		GRAY
		BLACK
		W/GREEN
		BROWN
		GREEN

△	GENERAL TOLERANCE (HOUSING)							USED ON
	10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
	±0.2	±0.3	±0.55	±0.95	±1.4	±30’	0.1	

주 기

- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 HS’G : MG632137
- 4.제품내 함유된 6대 유해물질 (납,수은,카드뮴,6가크롬, PBBs,PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

- 1.UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
- 2.MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 3.APPLICABLE HOUSING NO. : MG632137
- △ 4.6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MECURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.		
					FINISH	SEE TABLE			
					WIRE RANGE	CLASS			
					INSULATION	TYPE			
△	설계사양변경서(S110121)근거 형상 변경	SHS			'11.04.26				
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 2/1	PART NO.	MG632138
DR. HEO '00. 03. 24		CHK.KKJ				PART NAME			
CHK.		APP.CHOSH				HAZARD RELAY R/HOLDER			

APPROVED

2017-08-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK