


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

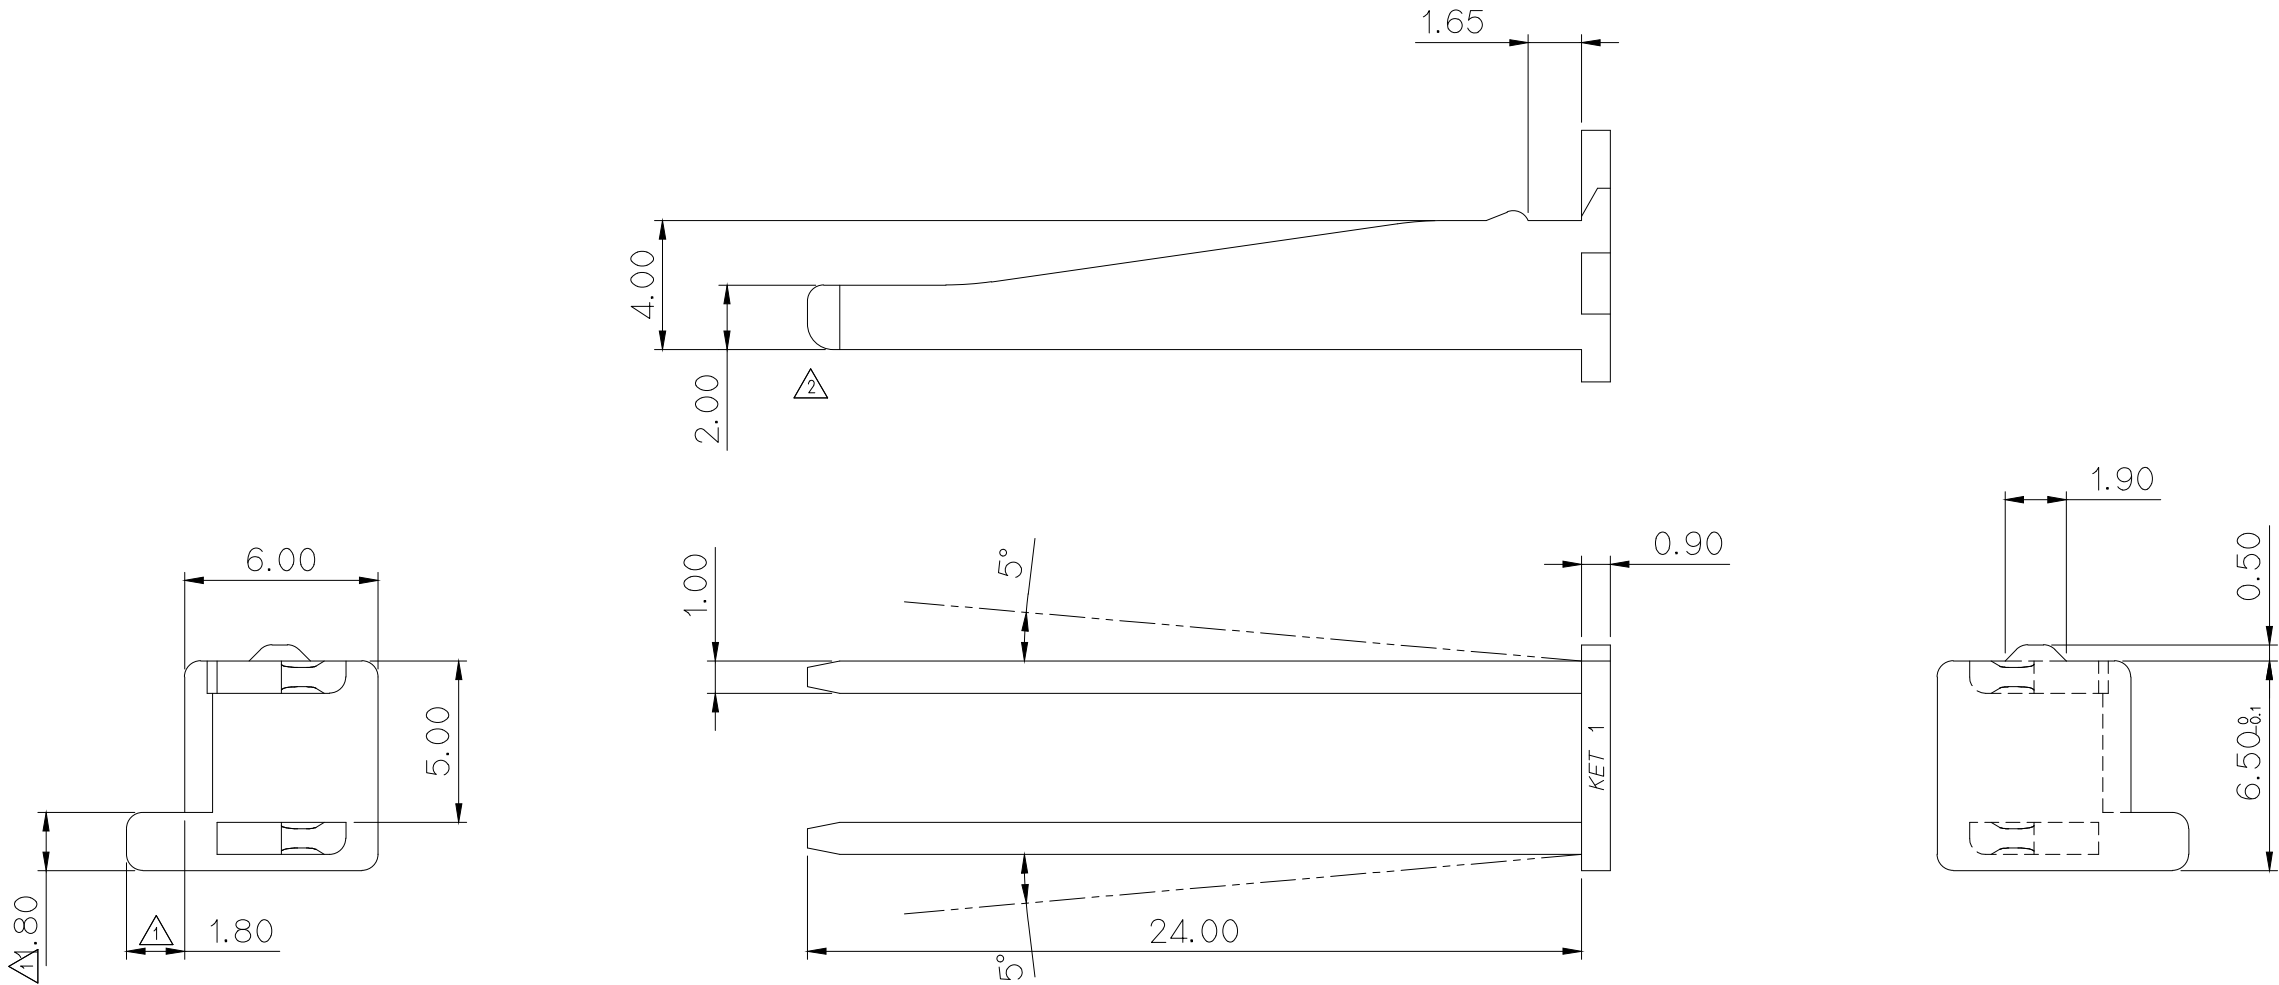

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2.적용 HOUSING: MG612234, MG622235
- 3.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING :MG612234, MG622235
3. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2018-12-10

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL	PBT	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
					FINISH	△ BLACK		
△2	단자 유지력 보강	元	KKJ	JJH	2002.7.04	WIRE RANGE	CLASS	.090
△1	HOUSING 오조립 방지	LSY	KKJ	JJH	2002.5.29	INSULATION	TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 4/1
DR.	WON. 2001.8.22	CHK.	KKJ		8/23	PART NAME	ASC-10P SPACER(공용)	
CHK.		APP.	CHOSH		8/23			

PART NO. MG632236