
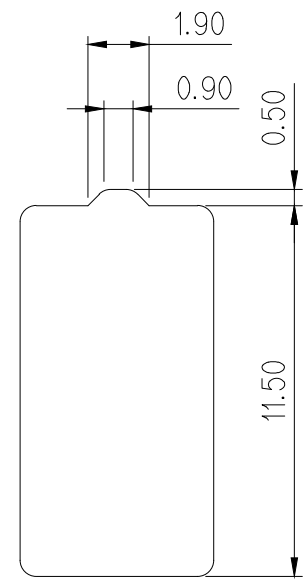
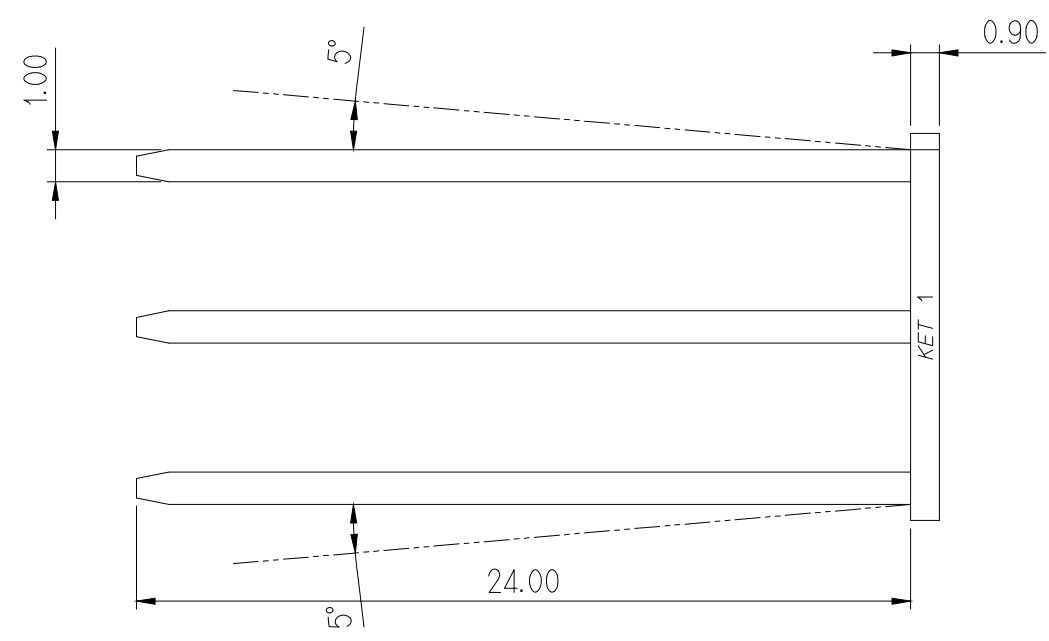
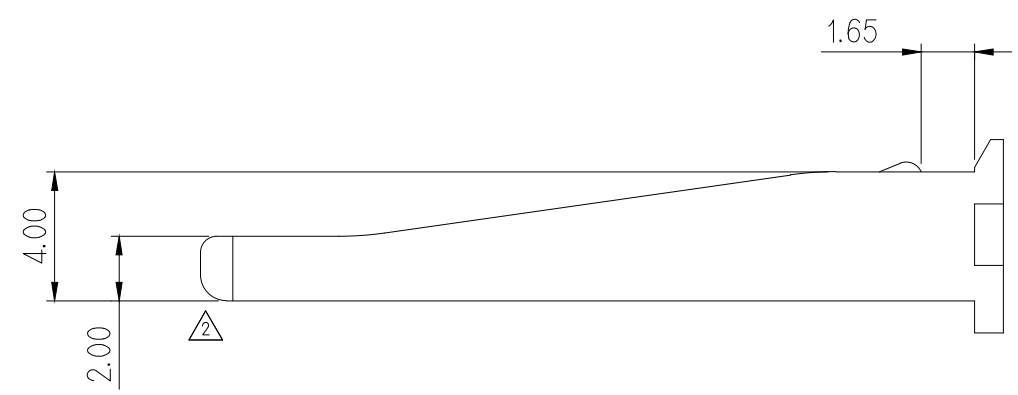


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

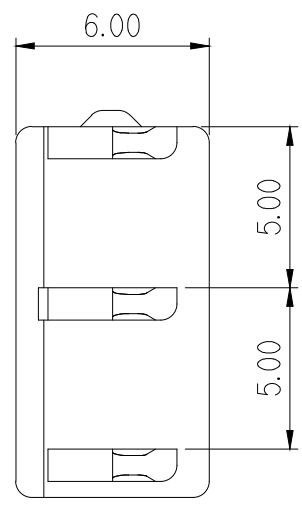

주 기

1. 기능상 유해한 BURR 및 WELDLINE등이 없을것.
2. 적용 HOUSING: MG612243, MG622244

NOTE

1. MUST BE FREE OF BURR, WEIDLIN AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE HOUSING :MG612243, MG622244



ISSUE MARK

		MATERIAL		SEE TABLE		KOREA ELECTRIC
		FINISH		BLACK		TERMINAL CO., LTD.
		WIRE RANGE			CLASS	.090
		INSULATION			TYPE	
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED
DR.	WON. 2001.8.22	CHK.			8/23	SCALE 4/1
CHK.		APP.			8/23	PART NO. MG632245
				PART NAME		ASC-15P SPACER(공용)