
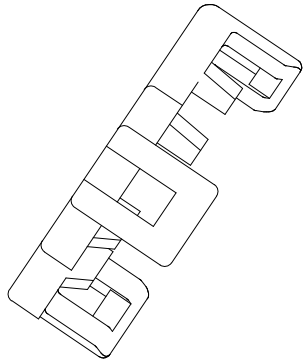

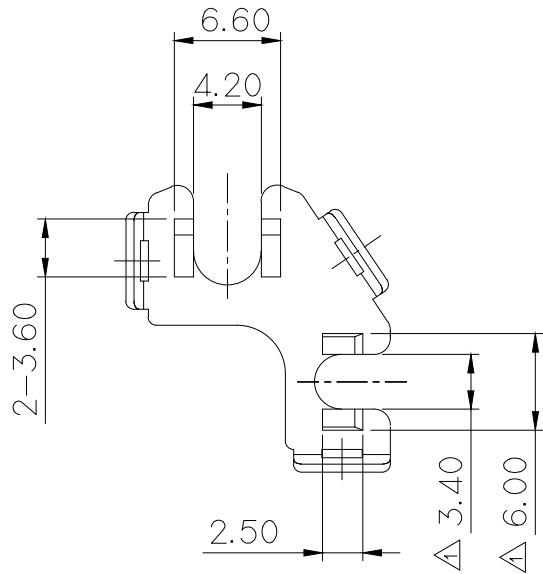
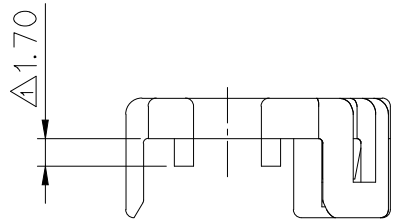
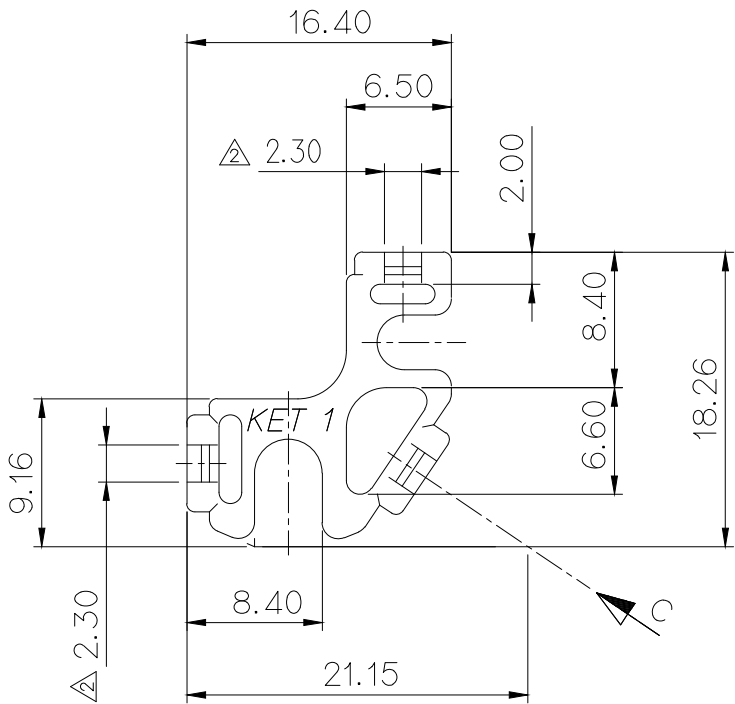


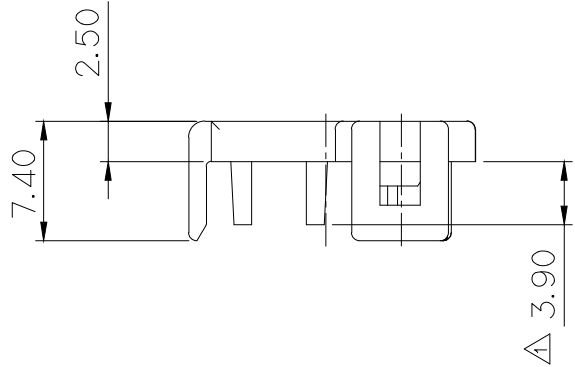

VIEW "C"

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

NO.	METERIAL	COLOR
0	PA66	NATURAL
1		RED
2		BLUE
3		YELLOW
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

주 기

- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 2. 적용 HOUSING: MG630685

NOTE

- 1. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- 2. APPLICABLE HOUSING :MG630685

APPROVED

2019-11-06

KOREA ELECTRIC
TERMINAL CO., LTD.
Product Developme
nt Team 1

ISSUE MARK

					MATERIAL		SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.
					FINISH		SEE TABLE	
					WIRE RANGE		CLASS	205+250
					INSULATION		TYPE	
 시방 변경서(S050217) 근거 수정	SSH	-	-	'05.09.13	TOLERANCE EXCEPT AS NOTED	SEE TABLE	SCALE 2/1	PART NO. MG632410
 시방(030095) 근거 수정	KYM	-	-	'03.05.14				
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE		
DR.	KJLEE'01.08.14		CHK.			08.16	PART NAME	
CHK.			APP.	HONEYCOMB-2.0F		08.16	2505 2F REAR HOLDER	