

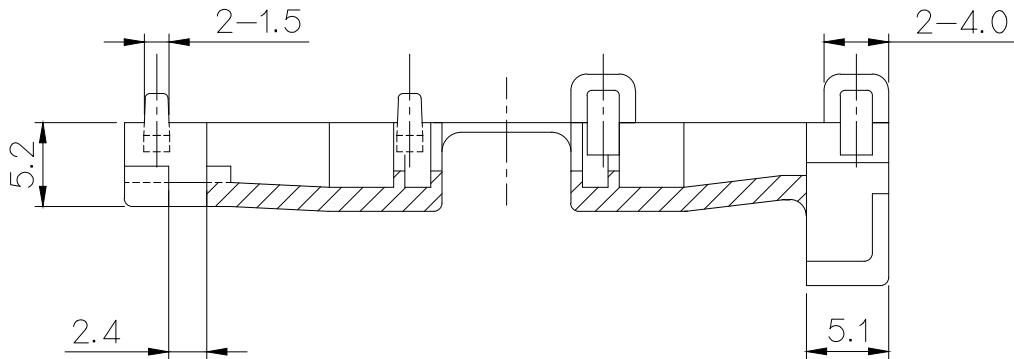
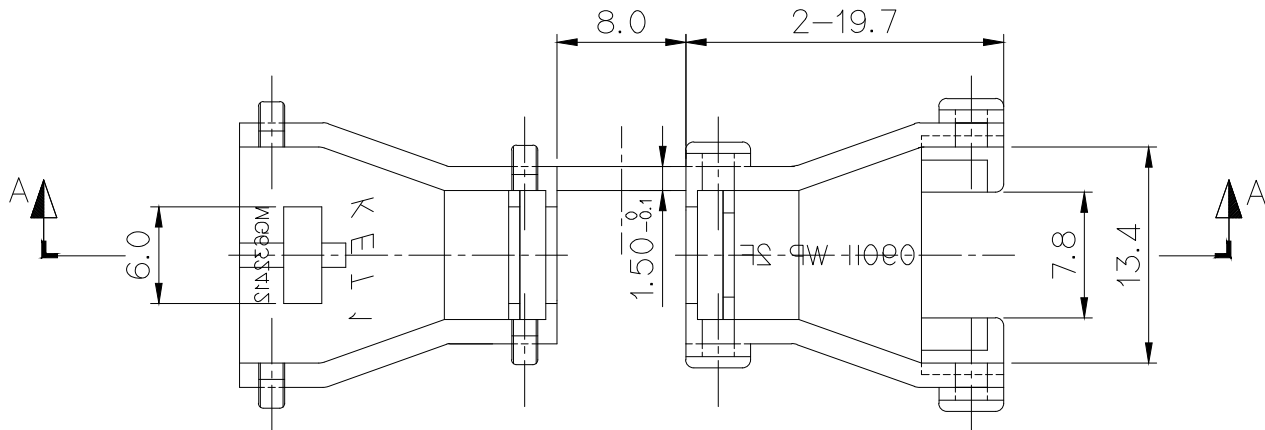


GENERAL TOLERANCE (HOUSING)					USED ON
10MAX	20MAX	45MAX	ANGLE	ECCENT	
±0.2	±0.25	±0.3	±30'	0.1	

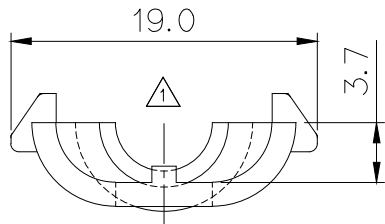

SECTION A-A(2/1)

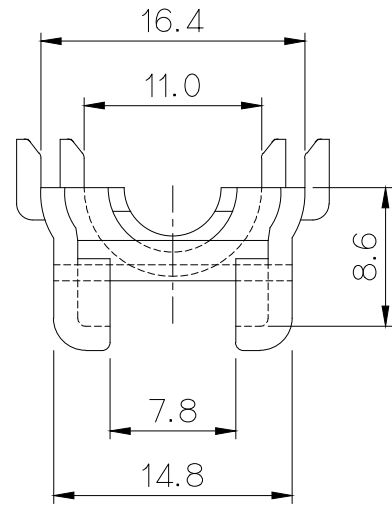

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.5 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE REC. HOUSING : MG651092
4. APPLICABLE CORRUGATED TUBE : ø5.0

주 기


- 1.지시하지 않은 반경 R은 0.5로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 PLUG HOUSING : MG651092
- 4.적용 CORRUGATED TUBE : ø5.0

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 1

ISSUE MARK

						MATERIAL		NYLON66		 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		BLACK			
						WIRE RANGE		CLASS			
						INSULATION		TYPE			
LTR	REVISION RECORD		DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE 2/1	PART NO. MG632412
DR.		LSY. 01.4.12		CHK.		KKJ	4/17		PART NAME		
CHK.				APP.		S.I. Sef	4/18		090IWP 2P PLUG REAR COVER		