


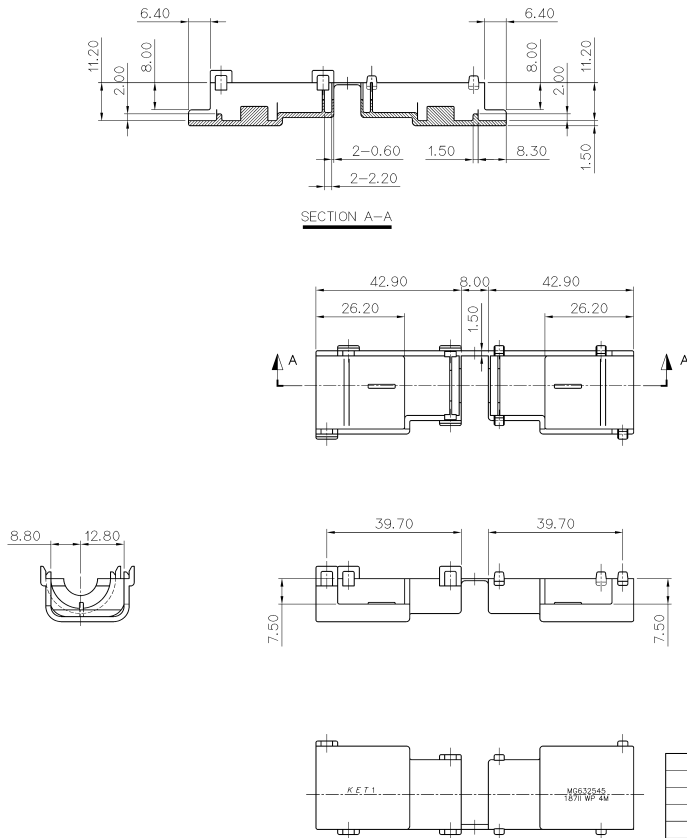

GENERAL TOLERANCE (HOUSING)

10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT
±0.2	±0.3	±0.55	±0.95	±1.4	±30°	0.1

USED ON

주 기

- 1.기능상 유해한 BURR 및 WELDLINE 등이 없을 것.
- 2.적용 HOUSING : MG651747
- 3.적용 CORRUGATED TUBE는 $\phi 9.0$ 로 할 것.

NOTE

1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
2. APPLICABLE REC. HOUSING : MG651747
3. APPLICABLE CORRUGATED TUBE : $\phi 9.0$



ISSUE MARK

					MATERIAL	SEE TABLE	 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH	SEE TABLE		
					WIRE RANGE			
					INSULATION			
LTR	REVISION RECORD	DR	CHK	APP	DATE	TOLERANCE EXCEPT AS NOTED	SCALE	PART NO.
DR.	LSY. 02.4.27	CHK	CHW		4/29	SEE TABLE	1/1	MG632545
		APP	CHW		4/29	PART NAME	187II WP 4M REAR COVER	