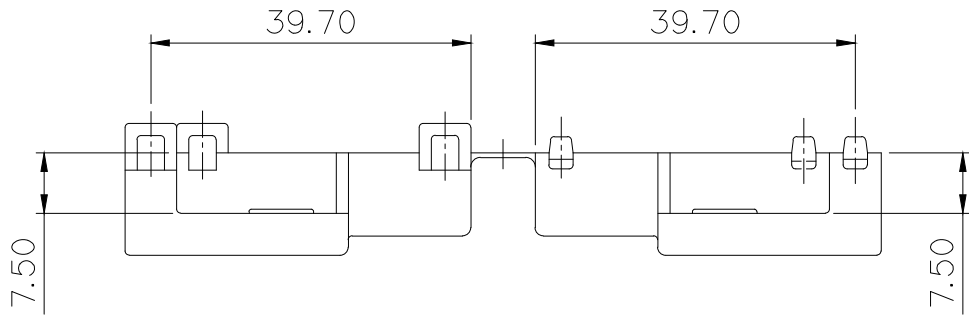

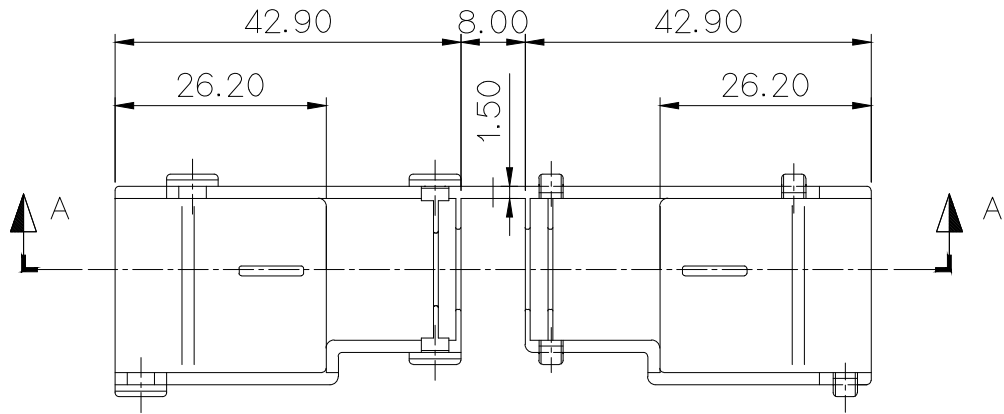
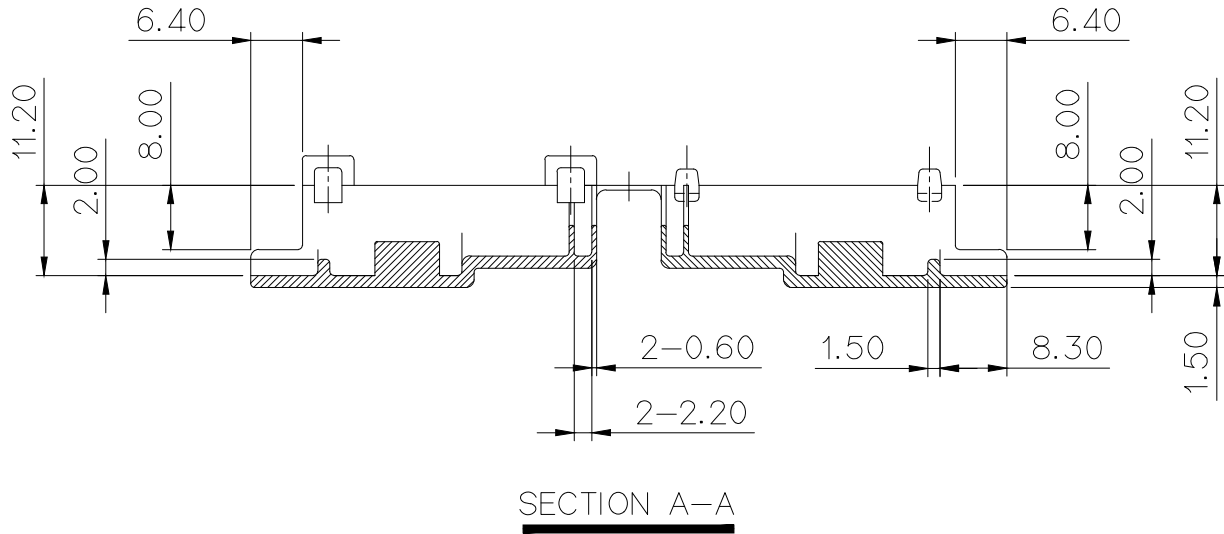


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

- 주 기
- 1.기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 2.적용 HOUSING : MG651747
 - 3.적용 CORRUGATED TUBE는 ø9.0 로 할 것.
 - 4.제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

- NOTE
1. MUST BE FREE OF BURR, WELDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
 2. APPLICABLE REC. HOUSING : MG651747
 3. APPLICABLE CORRUGATED TUBE : ø9.0
 4. 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL SEE TABLE		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH SEE TABLE			
					WIRE RANGE			CLASS
					INSULATION			TYPE
LTR	REVISION RECORD		DR. CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED	SCALE 1/1	PART NO. MG632545
DR.	LSY. 02.4.27		CHK.KKJ		4/29	PART NAME		
			APP. CHOSH		4/29	187II WP 4M REAR COVER		