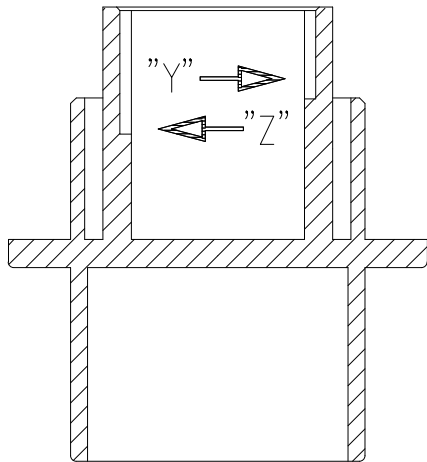
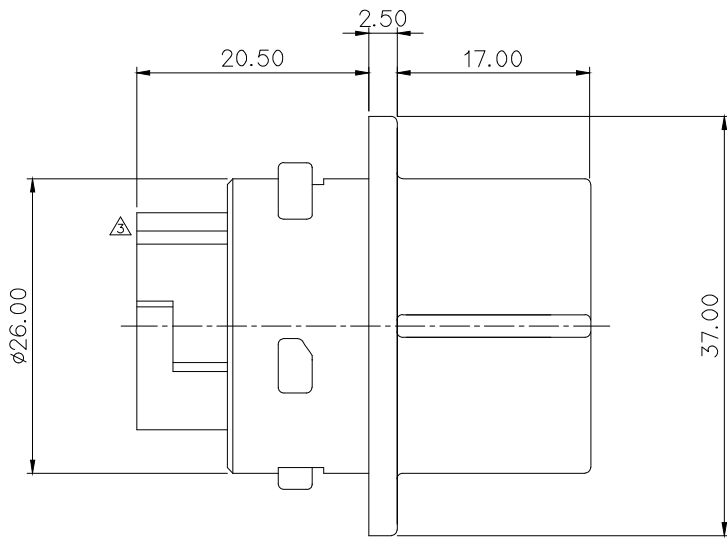
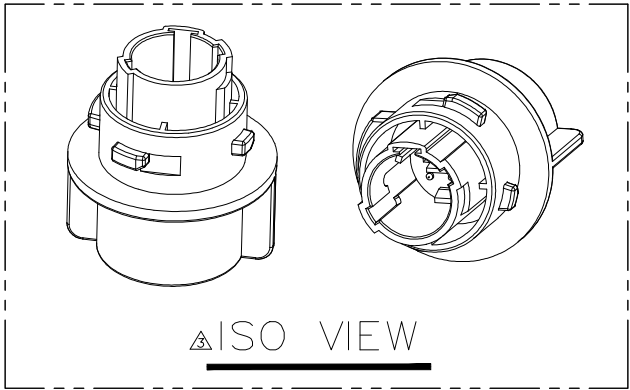


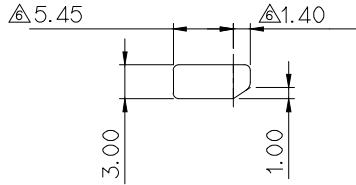
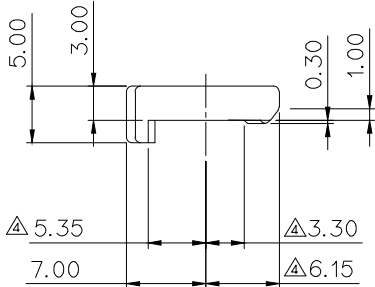
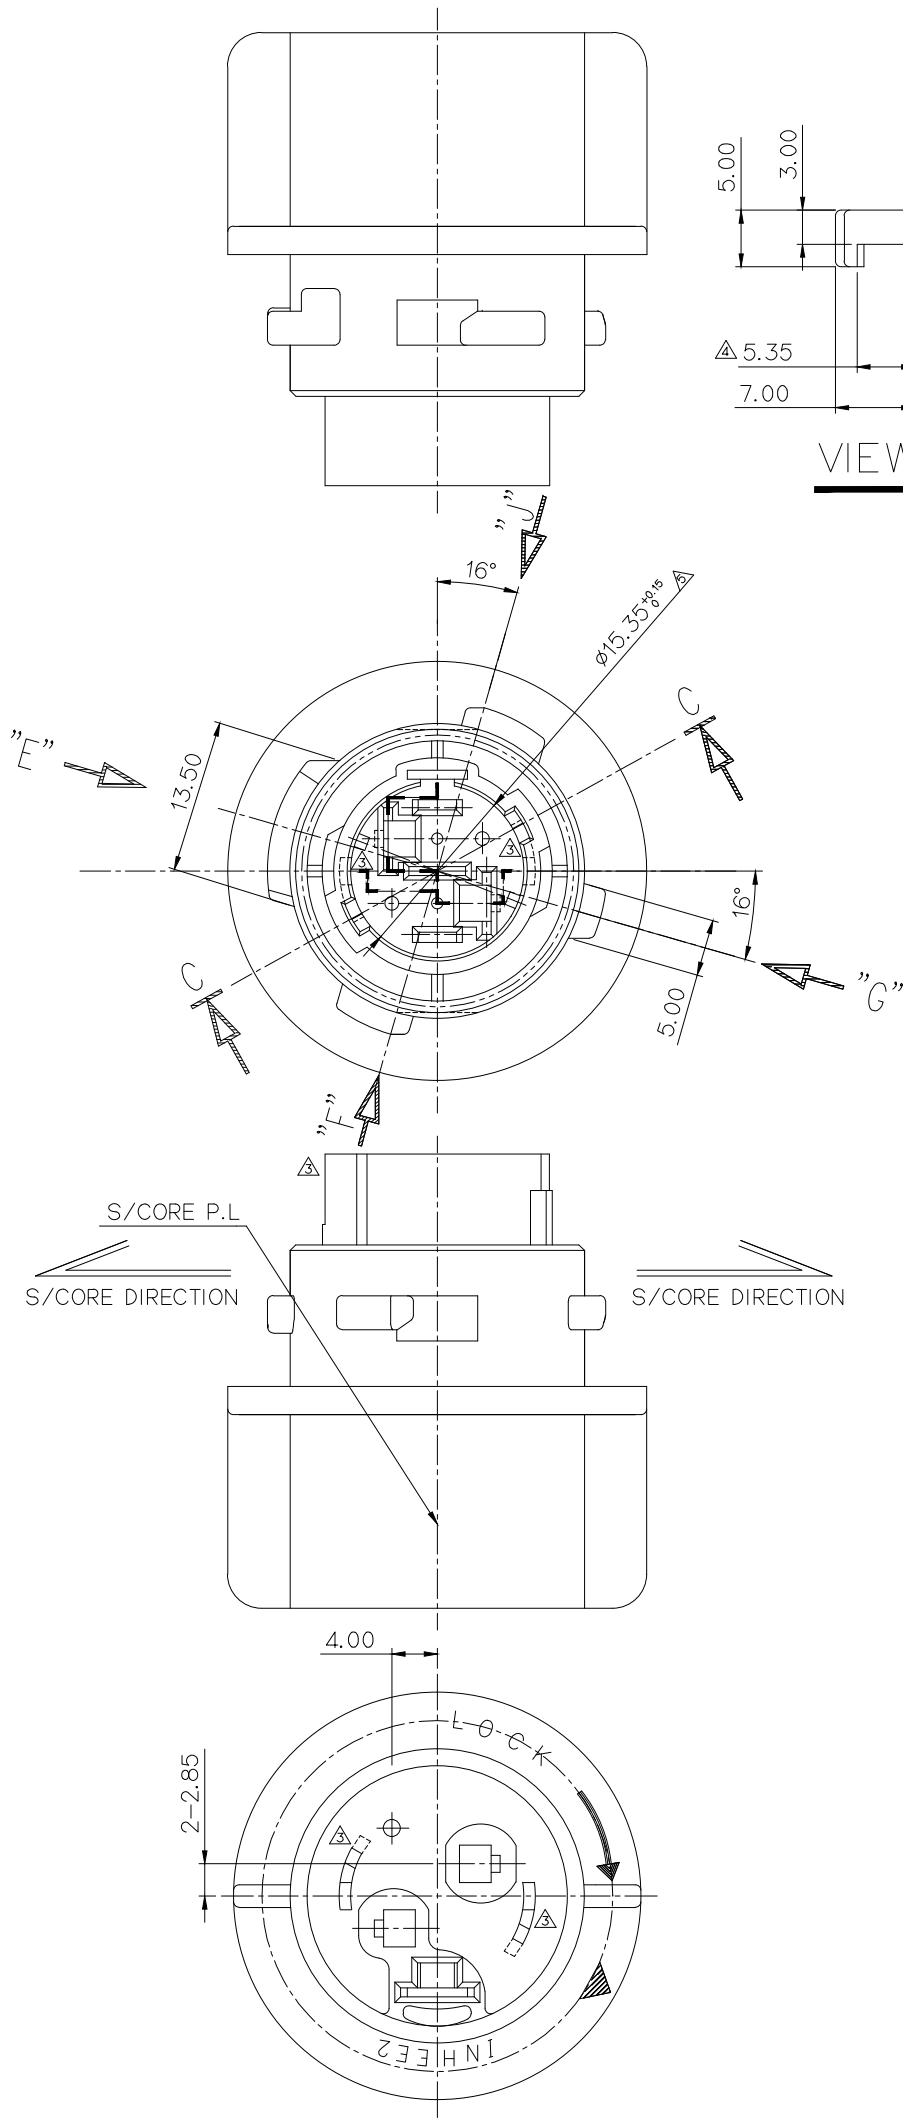


GENERAL TOLERANCE (HOUSING)										USED ON
10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE	ECCENT	
±0.15	±0.20	±0.30	±0.40	±0.50	±0.75	±0.90	±1.4	±30'	0.1	

NO.	MATERIAL	COLOR
0	PA66+MR30%	NATURAL
1		RED
2		BLUE
20		JADE
3		YELLOW
4		GRAY
40		DARK GRAY
41		LIGHT GRAY
5		BLACK
6		DARK GREEN
7		BROWN
8		LIGHT GREEN
9		MAGENTA
11		ORANGE

- 주 기
- 1.지시하지 않은 반경 R은 0.3 로 한다
 - 2.지시하지 않은 모따기 C는 0.3으로 한다.
 - 3.기능상 유해한 BURR 및 WELDLINE등이 없을것.
 - 4.SEAL GASKET 접촉 및 RIB PARTING면에 BURR 등이 없을 것.
 - 5.적용 TERMINAL : ST760521-1(P), ST760520-1(E)
 - 6.적용 WIRE SEAL : MG682028

- NOTE
1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
 2. UNLESS OTHERWISE SPECIFIED ALL CHAMFERS TO BE 0.3 CHAMFER.
 3. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
 4. FLASH ARE NOT ALLOWED ON CONTACT MOLDED PART OF SEAL GASKET.
 5. APPLICABLE OF TERMINAL ST760521-1(P), ST760520-1(E)
 6. APPLICABLE OF WIRE SEAL : MG682028

APPROVED

2016-03-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Develop
ment Team 3

ISSUE MARK

KIET KOREA ELECTRIC
ENGINEERED TERMINAL CO., LTD.

MATERIAL SEE TABLE

FINISH SEE TABLE

WIRE RANGE

INSULATION

SCALE 2/1

PART NAME

RCL B/H WP DOUBLE (F:40)

ECO-1506-022	근거 도면 제작성	SSY	SSH	BIN	'15.06.01
ECO-1505-166	근거 도면 제작성	SSY	SSH	BIN	'15.05.18

ECO-1412-334	근거 도면 제작성	NKT	SSH	BIN	'14.12.24
ECO-1205-121	근거 도면 제작성 (형상변경, 도면 현실화)	KBS	UYH	HSB	'12.05.17
ECO-1111-189	근거 도면 제작성 (도면 3D 추가, 도면 현실화)	AJH			'11.11.23
ECO-1111-153	근거 도면 제작성 (도면 지수 기입 및 형상 변경)	AJH			'11.11.16
ECO-1111-121	근거 도면 제작성 (J-SLOT부 실 도장으로 인한 형상 변경)	AJH			'11.11.14
검사보고서	합격에 의한 도면 제작성	BIN			02.06.22
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE
DR.	BIN, '01.10.29	CHK.	KO, '01.11.01		
CHK.		APP.		11/1	

TOLEANCE EXCEPT AS NOTED

SEE TABLE

PART NO.

MG632565