
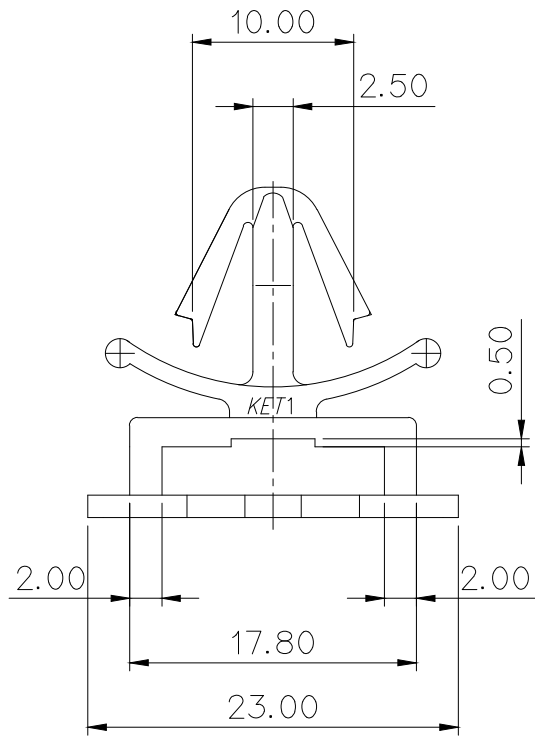
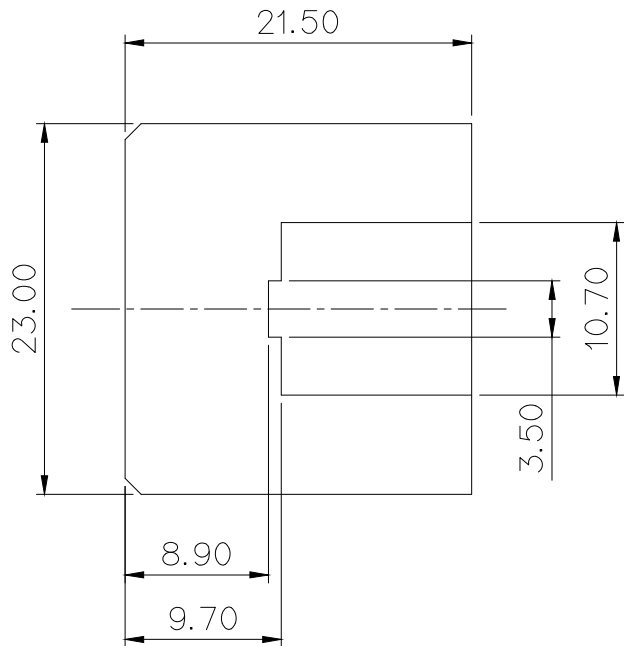
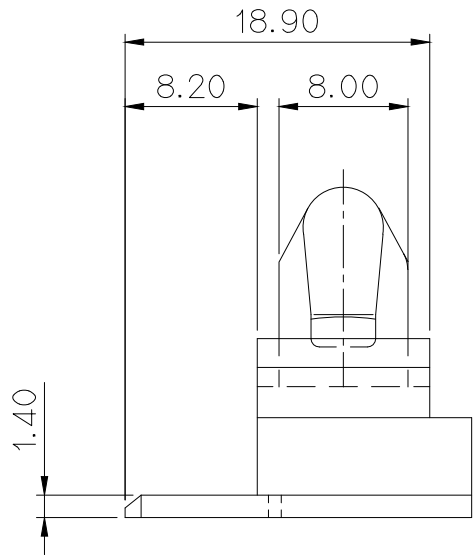
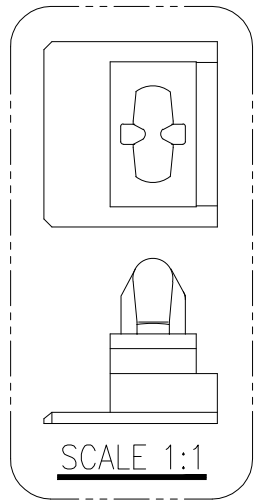
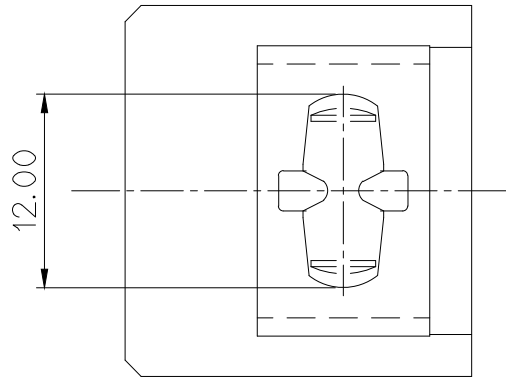


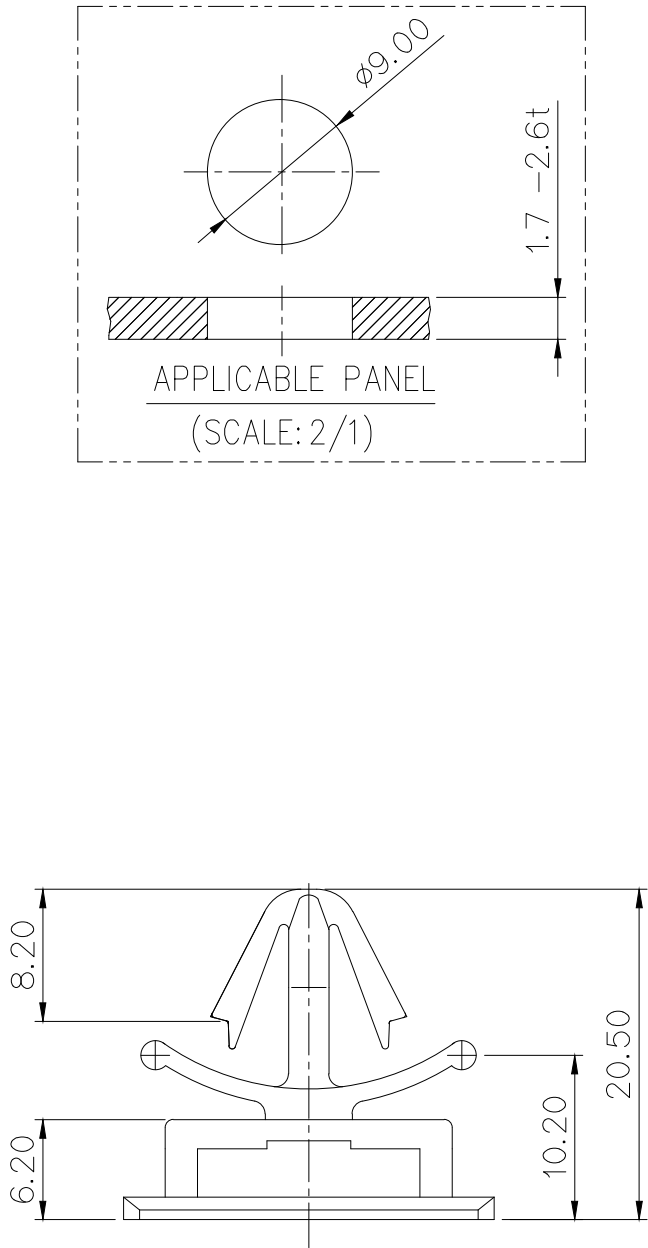

GENERAL TOLERANCE (HOUSING)							USED ON
10MAX	50MAX	100MAX	250MAX	250VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

주 기

- 지시없는 반경 R은 0.3으로 한다.
- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING : MG650943-5, MG652290-5
- KET 문자 : 기울기 15°(H; 0.1~0.2, SIZE; 1.5)
CAVITY NO.: 기울기 0°(H; 0.1~0.2, SIZE; 1.5)
- 제품내 함유된 6대 유해물질 (납, 수은, 카드뮴, 6가 크롬, PBBs, PBDEs)은 EU ELV 지침 및 RoHS 법규에서 지정한 최대 허용 농도를 초과해서는 안된다.

NOTE


- UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
- MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING : MG650943-5, MG652290-5
- KET MARK : TAPER 15° (H; 0.1~0.2, SIZE; 1.5)
CAVITY NO. : TAPER 0°(H; 0.1~0.2, SIZE; 1.5)
- 6 HAZARDOUS SUBSTANCES IN PARTS (LEAD, MERCURY, CADMIUM, HEXAVALENT CHROMIUM, PBDEs) SHALL NOT EXCEED THE MAXIMUM PERMISSIBLE CONCENTRATION PRESCRIBED UNDER EU ELV DIRECTIVE.

APPROVED

2018-12-07

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

					MATERIAL PA66		 KOREA ELECTRIC TERMINAL CO., LTD.	
					FINISH BLACK			
					WIRE RANGE			
					INSULATION			
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE 2/1	PART NO. MG632577
DR. YSW 06.02.01		CHK. HSH				PART NAME		
CHK.		APP. KKJ				312II WP CLIP (ø 9 정 HOLE TYPE)		