

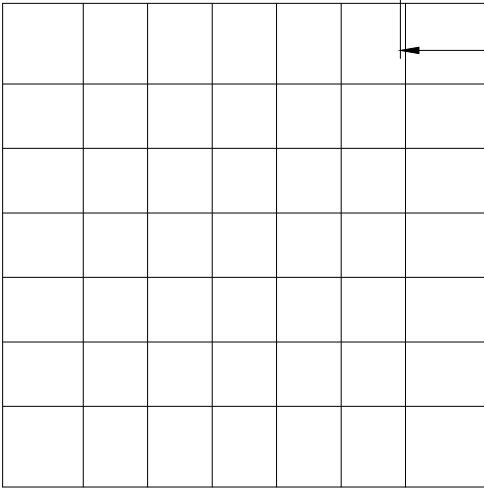
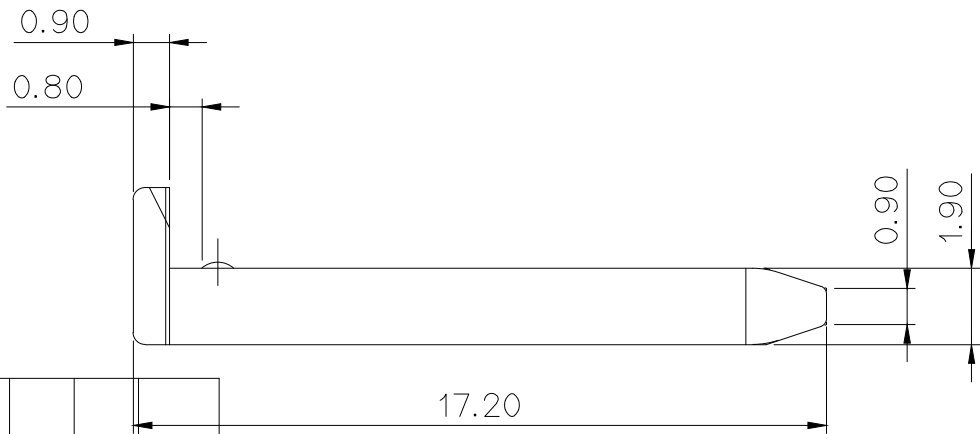


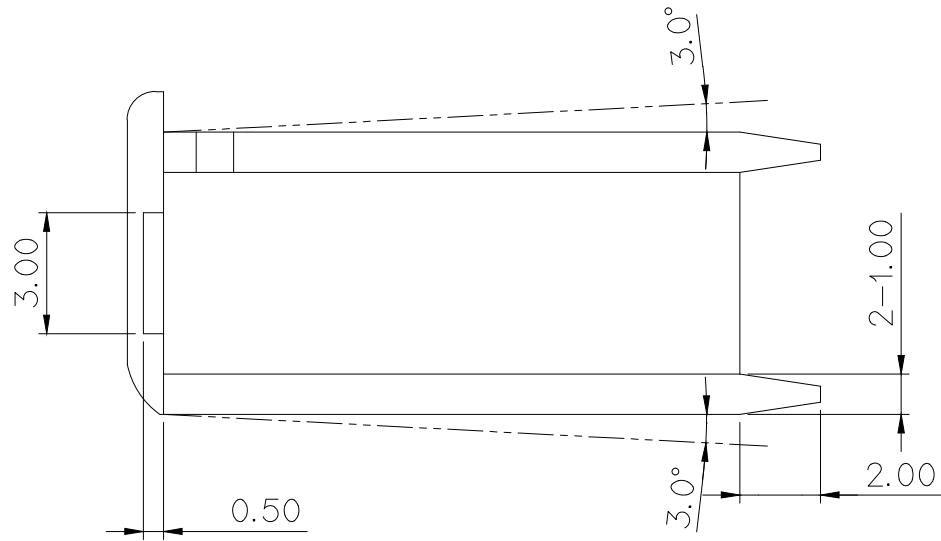

GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	

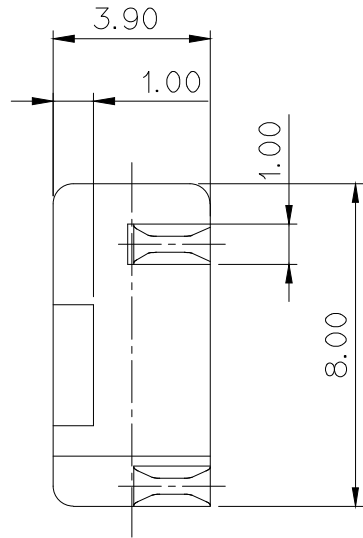

△	NO.	MATERIAL	COLOR
	0	PBT	NATURAL
	1		RED
	2		BLUE
	20		JADE
*	3		YELLOW
	4		GRAY
	40		DARK GRAY
	41		LIGHT GRAY
*	5		BLACK
	6		DARK GREEN
	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

주 기

- 기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 적용 HOUSING: MG672588

NOTE


- MUST BE FREE OF BURR,WEIDLINE AND IMPERFECTION THAT AFFECT FUNCTION.
- APPLICABLE HOUSING: MG672588

APPROVED

2016-02-26

KOREA ELECTRIC
TERMINAL CO., LTD.
Korea Electric Te
rminal Co., LTD.

ISSUE MARK

						MATERIAL		PBT	 KOREA ELECTRIC TERMINAL CO., LTD.	
						FINISH		RED		
						WIRE RANGE		CLASS .09011 WP		
						INSULATION		TYPE		
	ECO-1511-252 큰거 도면 변경 (색상 TABLE 추가)	YSS	CKY	LSY	'15.11.13.	TOLERANCE EXCEPT AS NOTED		SEE TABLE	SCALE 5/1	PART NO. MG632589
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME				
DR. LSY. 2002.6.21		CHK.								
CHK.		APP.				ASC WP JOINT 6F SPACER				