


△	NO.	PART NAME	P/NO	MATERIAL	FINISH
①		RK 3P R/HOLDER	MG632606-7	PBT	BROWN
②		RK 3P R/HOLDER	MG632606-40	PBT	DARK GRAY

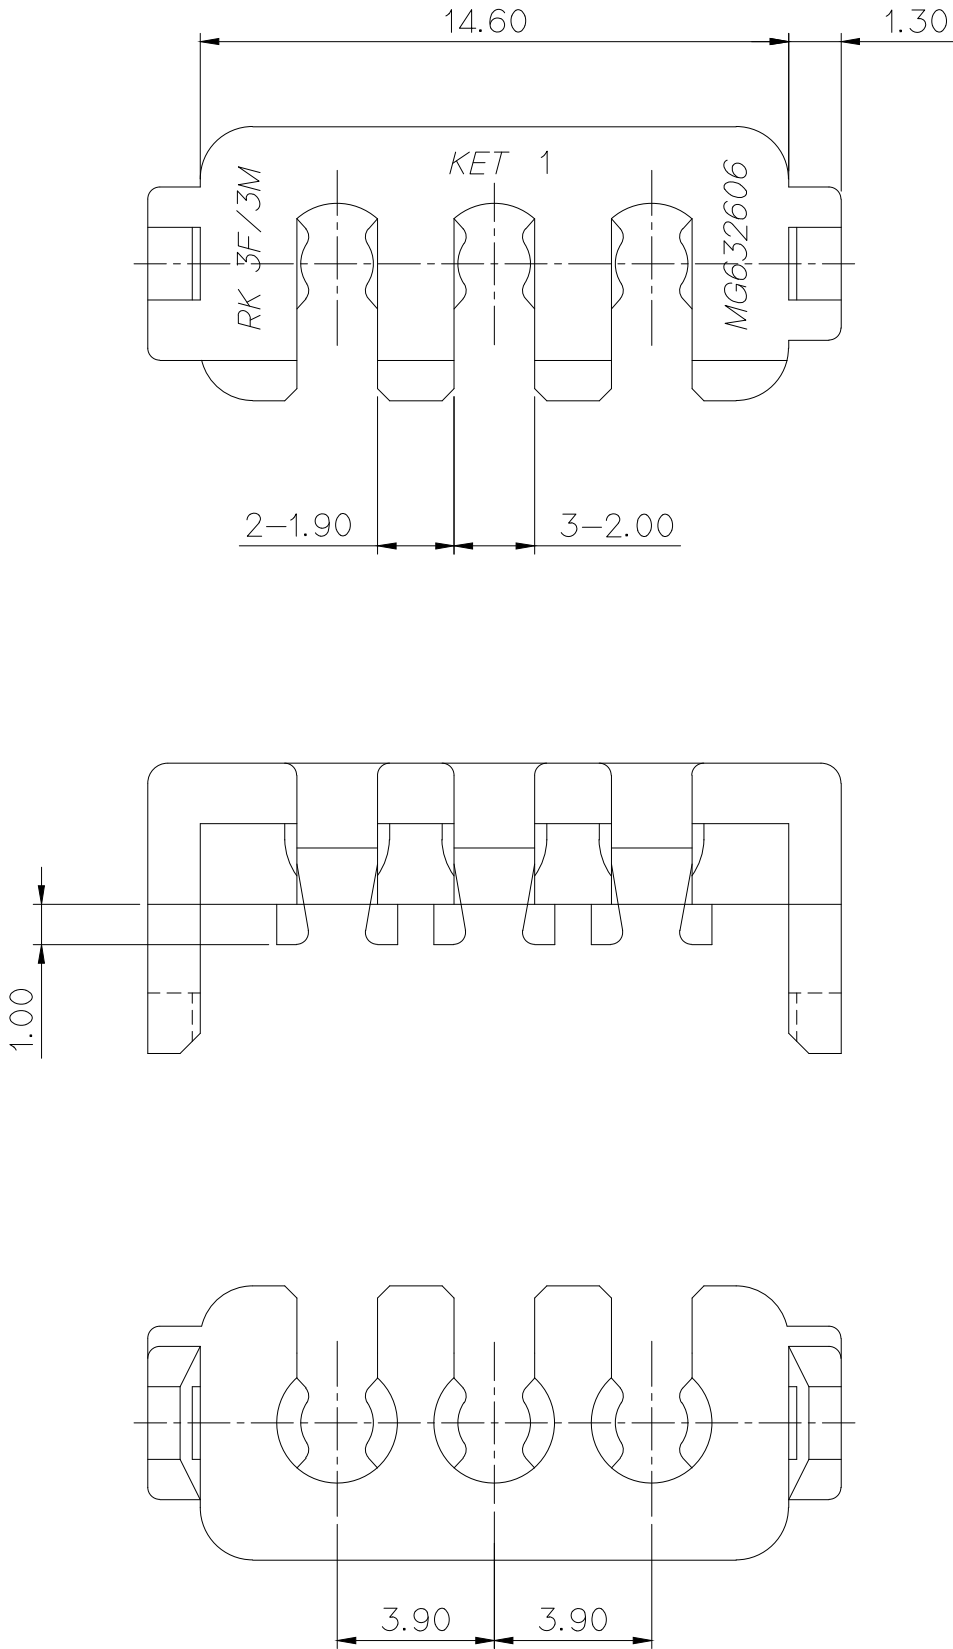


GENERAL TOLERANCE (HOUSING)							USED ON
10 MAX	50 MAX	100 MAX	250 MAX	250 VR	ANGLE	ECCENT	MG642602 MG612603
±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	MG642605

주 기

- 1.지시하지 않은 반경 R은 0.3로 한다
- 2.기능상 유해한 BURR 및 WELDLINE등이 없을것.
- 3.적용 HOUSING : MG642602, MG641603, MG642605

NOTE

1. UNLESS OTHERWISE SPECIFIED ALL RADII TO BE 0.3 RADIUS.
2. MUST BE FREE OF FLASH, SINK AND IMPERFECTION THAT AFFECT FUNCTION.
3. APPLICABLE HOUSING : MG642602, MG612603, MG642605

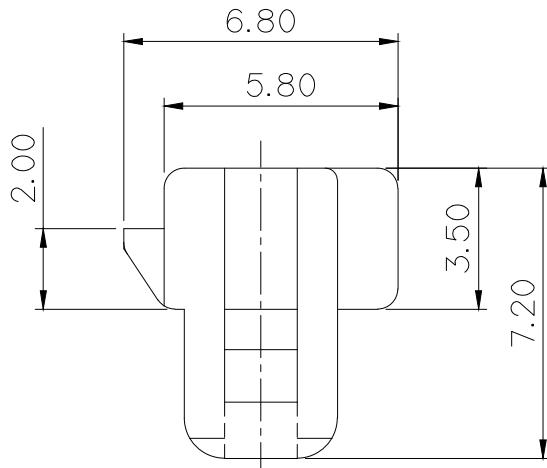

△	NO.	MATERIAL	COLOR
	0	PBT	NATURAL
	1		RED
	2		BLUE
	3		YELLOW
*	40		DARK GRAY
	41		LIGHT GRAY
	5		BLACK
	6		DARK GREEN
*	7		BROWN
	8		LIGHT GREEN
	9		MAGENTA
	11		ORANGE

APPROVED

2016-03-11

KOREA ELECTRIC
TERMINAL CO., LTD.
Connector Development Team 1

ISSUE MARK

						MATERIAL △ SEE TABLE	KET KOREA ELECTRIC ENGINEERED TERMINAL CO., LTD.	
						FINISH △ SEE TABLE		
						WIRE RANGE		
						INSULATION	CLASS	91RK (040 WP)
△	ECO-1411-043 근개 도면 제작성 (HMC 주관 엔진룸 미관개선을 위한 색상변경)	KSJ	HYJ	LSY	2014.11.06	TOLERANCE EXCEPT AS NOTED SEE TABLE	SCALE	5/1
LTR	REVISION RECORD	DR.	CHK.	APP.	DATE	PART NAME	PART NO.	MG632606
DR.	HEO S.H 02.08.22	CHK.	KKJ 02.08.22			RK 3P R/HOLDER		
CHK.		APP.	CSH 02.08.22					